



REV	DATE	ECO#
C	12/14/92	1232
D	02/28/05	27656

DRAWING NOT TO SCALE  
ALL DIMENSIONS IN INCHES

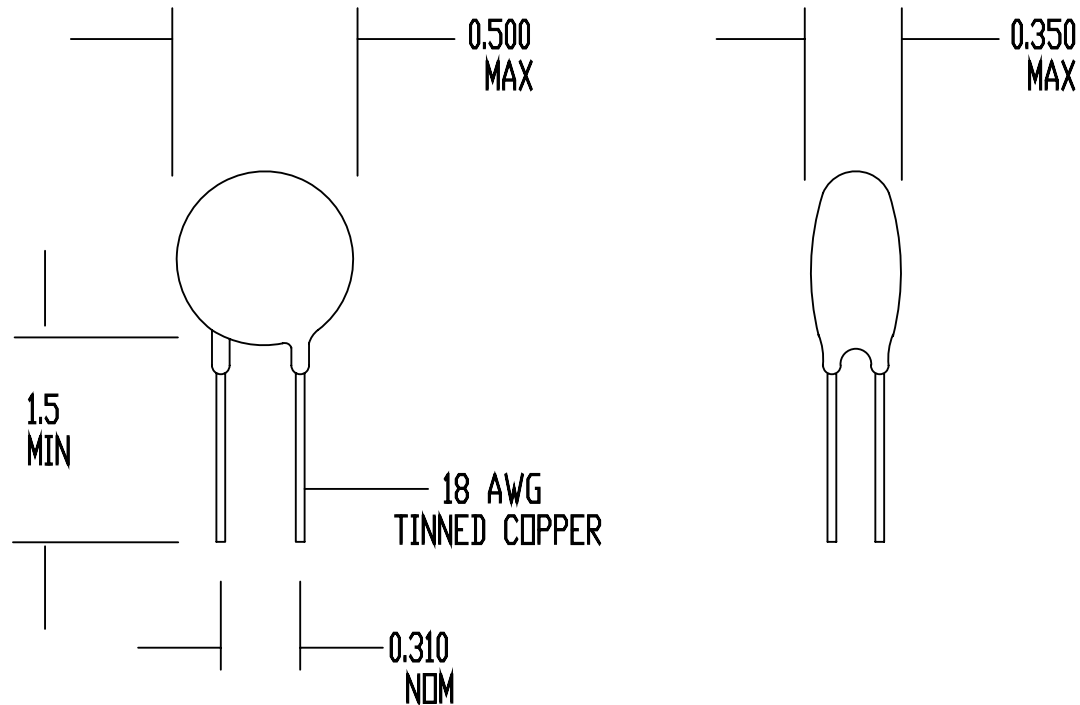

**SPECIFICATIONS:**

RESISTANCE AT 25 DEG C = 12 OHMS +/- 10%  
 MAXIMUM CONTINUOUS CURRENT (I<sub>max</sub>) = 4.0 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.22 OHMS NOMINAL  
 MAXIMUM VOLTAGE RATING = 265 VAC (RMS)  
 MAXIMUM SURGE RATING = 40 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 LEADS = RTI P/N STL-209-37  
 MARKING = OPTIONAL

DRAWN BY D. NGUYEN		 <b>AMETHERM</b> <i>Circuit Protection Thermistors</i>
DATE 06/15/88	ORIG. F. TISED	
REV D	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG39

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SG39](#)