## **SPECIFICATION**

**Material:** Boot: APM RUBRGLAS <sup>™</sup> (transparent silicone rubber), conforms to A-A-59588, Class III Grade 50, Frame: steel, zinc plated with chromate finish. Screw: SEELSKREW ® (self-sealing screws),

stainless steel with silicone rubber O-ring. **Temperature Range:** HEXSEAL: -94°F to +400°F

Pressure Range: Dust tight and splashproof.

Operational Life: 10,000 actuations (minimum).

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, corona and most


acids.

## Notes:

- 1. Mounting screws are supplied in lengths shown unless otherwise specified.
- 2. New sizes and types of RUBRGLAS-SEELS ® are being added regularly. Please request other types and styles as required. **Agency Recognition:** Front Panel mounted Circuit Breaker Boots are UL- listed to UL Std. 50, types 1,2,3,12,12K and 13.

Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL

Std. 50, type 1, Also meet CSA standards.

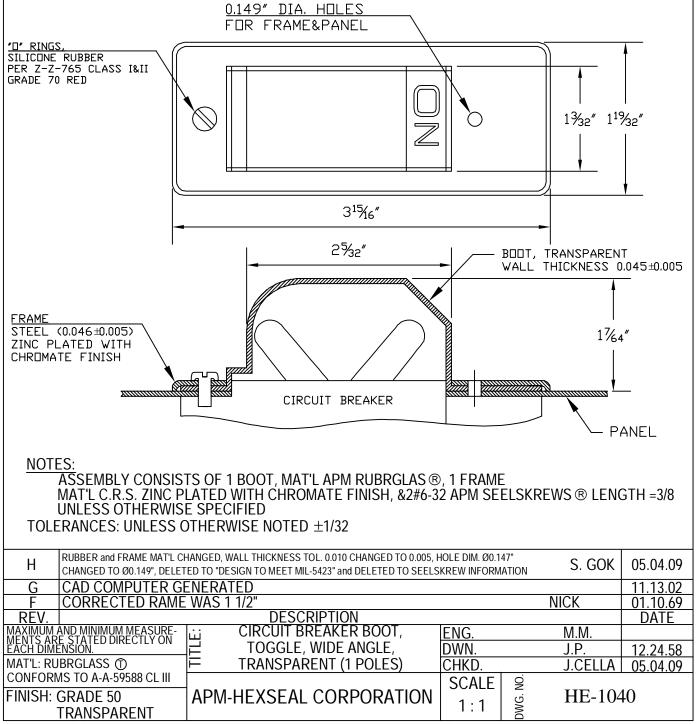

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

APM HEXSEAL: