
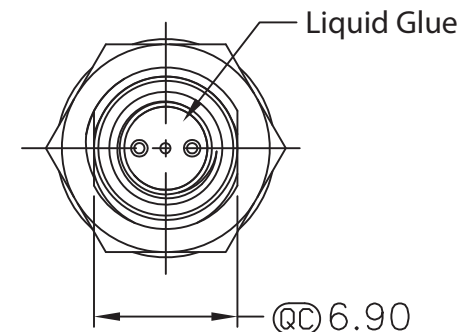
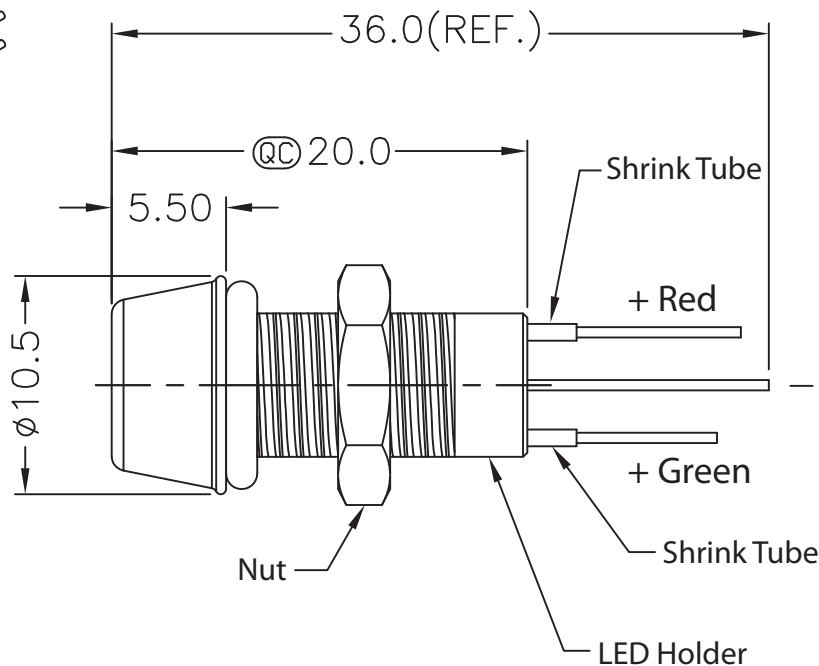


Recommended
Panel Cut-Out

Ⓢ = Assmann logo

RoHS
Compliant

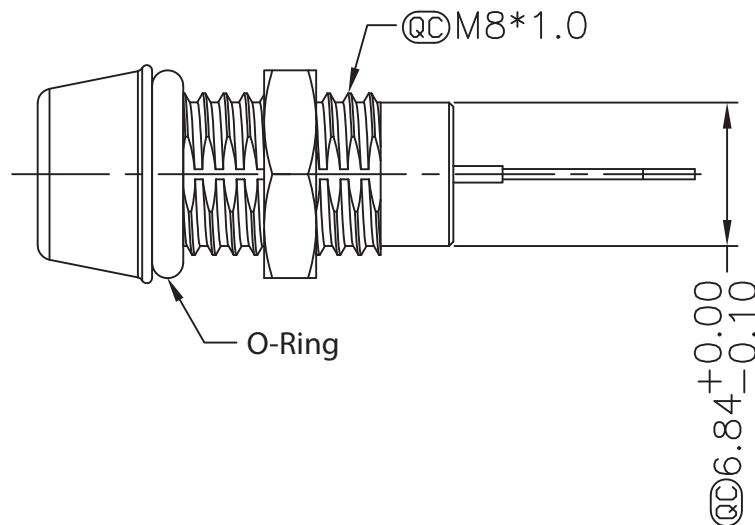

Material:

- Waterproof Rate: IP67
- LED Holder: Copper Alloy, Nickel plating
- LED: $\varnothing 3\text{MM}$, Super Bright, Red/Green Bi-color LED
- Lens Color: Water Clear
- Forward Voltage: Red Typ. 2.05V/Max.2.5V
Green Typ. 3.4V/Max.3.8V
- Forward Current: Red Typ. 35mA
Green Typ. 20mA
- Luminous Intensity: Red Typ.1,000(Mcd)
Green Typ.2,000(Mcd)
- Reverse Voltage: 5V DC
- Operating Temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- O-ring: Silicone, Gray
- Screw Nut: Copper Alloy, Nickel plating
- For Panel Thickness 6.5MM Max.

Ⓢ Quality Control: Important Dimension to check
Unit: $\text{MM} \pm 0.25\text{MM}$

ITEM NO.

A-LED8-1AAAS-MR7-1-R

TITLE

Waterproof LED - Red/Green color, M8 size connector,
 $\varnothing 3\text{MM}$, Metal housing, Solder Type, IP67 unmated

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved