

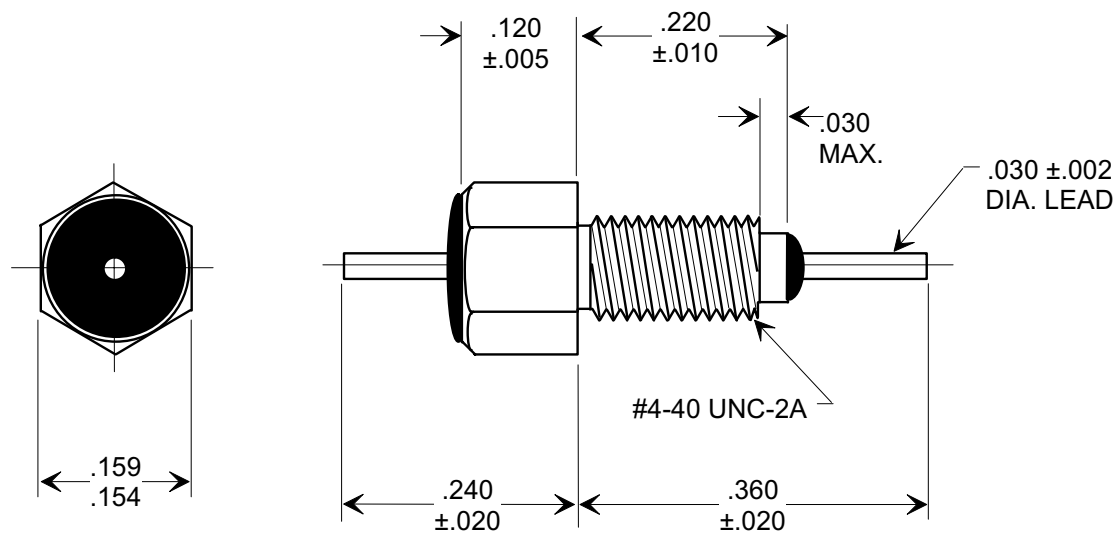


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING


Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MOUNTING HARDWARE

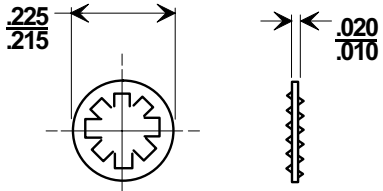

LOCK WASHER

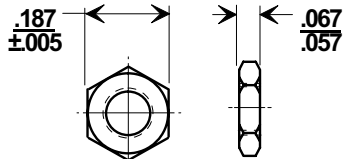

HEX NUT

NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 lb. - in.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260°C.
SEE INSTALLATION RECOMMENDATIONS.
5. LOCKWASHER AND HEX NUT INCLUDED.
6. TUSONIX TRADEMARK AND PART VARIATION NUMBER STAMPED ON HEX FLATS.
7. FLASH AT 500 VDC FOR 25 SECONDS

STYLE	VAR.	CAP. (pF)	TOLERANCE	125° WORKING VOLTAGE		CURRENT D.C. (AMPS)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
				85° C	125° C		1MHz	10MHz	100MHz	1GHz	10 GHz
4400	074	10,000	GMV	---	115VAC 200VDC	10A	4	21	35	50	60

X-2015 Rev-0
REVISION RECORD
 Original Release
 C.O. 19980623-2-01
0

--TOLERANCES-- Unless Otherwise Specified		Title BUSHING STYLE EMI FILTER	
DECIMAL ± // //		Drawn S.M. 06-26-98	Scale 5 X
ANGLES ± // //		Approved S.C. 06-26-98	
TUSONIX TUCSON, ARIZONA		A 4400-074	