




P1

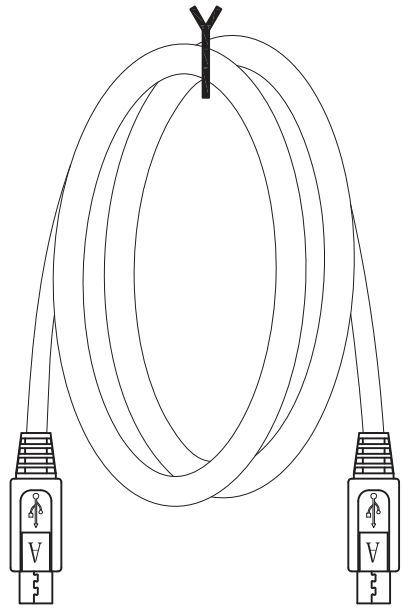

P2



PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	5	
SHELL	DRAIN + BRAID	SHELL	

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+A:)*1P+ 28AWG(7/0.12TC)*2C]+AEB(488 TC)
 - Jacket: Black
 - OD: 3.5MM
- Connectors: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-50P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC



Scale	1:1							Name
TOLERANCE							Drawn	10/11/12 Miller
X.X	±0.40						Approved	10/11/12 Warner
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							



Item No.		AK67401-1-R
Title		
USB2.0 Micro Connection Cable, 1 Meter USB B Micro Male <=> USB B Micro Male		
Drawing No.		rev01
Replace	Sheet	