



R · A · M · BWZ, BXZ, BUZ SERIES

SURGE PROTECTOR





Safety Agency : Standard		File NO.
TÜV	IEC60384-14	J9650111


Features

- Designed for use in power circuit applications which require European mark.
- Designed to protect against common mode noise transient surge.


Dimensions

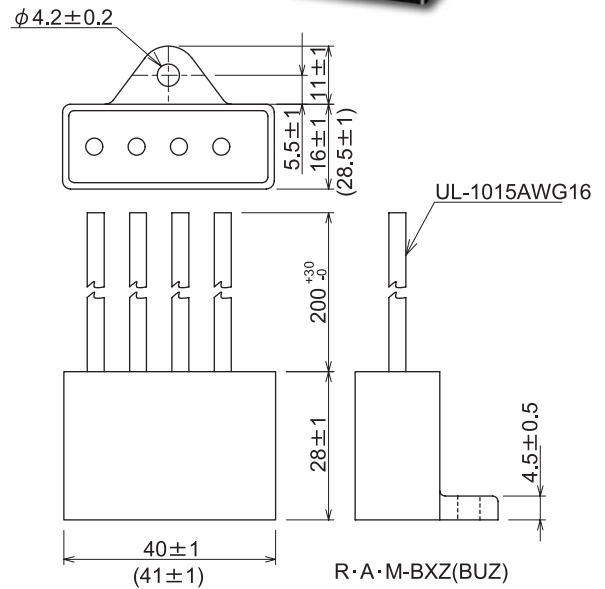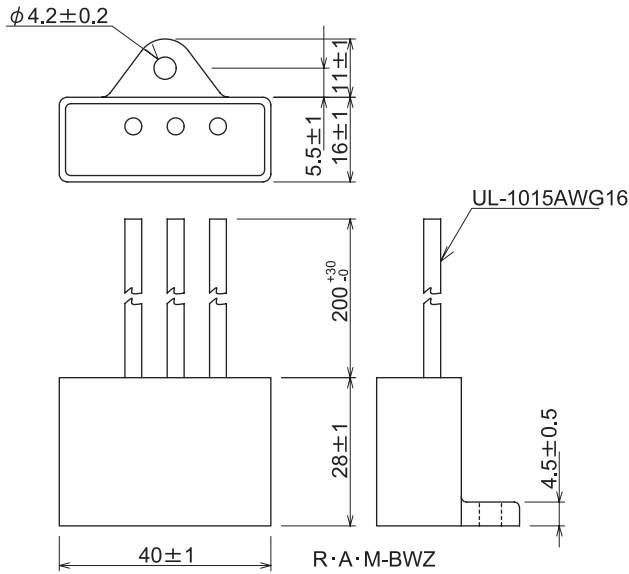


Circuit



R · A · M · BWZ



R · A · M · BXZ



R · A · M · BUZ

Electrical Specifications

Safety Agency	Model Number	Rated Voltage 50/60Hz Vrms	Max Line Voltage Vrms	Varistor Voltage (V)±10%	DC Breakdown Voltage (Ez) +30, -20%	Peak Surge Current 8/20µs (A)	Insulation Resistance DC500V	Voltage Withstand Test	Operating Temp. range (°C)	Weight (g)	
	R · A · M · 242BWZ	1-2	125	140	540	2000	10 ⁹ Ω	-	-20 ~ +70	40	
		1,2-≋	-	-	-			2400			AC1000V 60s AC1250V 3s
	R · A · M · 302BWZ	1-2	250	300	940			-			AC1500V 60s
		1,2-≋	-	-	-			3600			-
	R · A · M · 362BWZ	1-2	250	300	940			-			AC1500V 60s AC1800V 3s
		1,2-≋	-	-	-			3600			-
R · A · M · 362BXZ	1-2-3-1	250	300	940	-	AC1500V 60s AC1800V 3s					
	1,2,3≋	-	-	-	3600	-					
R · A · M · 302BUZ	1-2-3-1	250	300	470	-	-	10 ⁹ Ω	AC1500V 60s	50		
	3-≋	-	-	-	3000	-	-				