THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
AD	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER 0G51-0008-99	06APR99	RB	DD
	D	REV PER 0G51-0062-99	05/18/99	MM	EL
	D1	REVISED ECR-09-010116	08MAY2009	AZ	SY

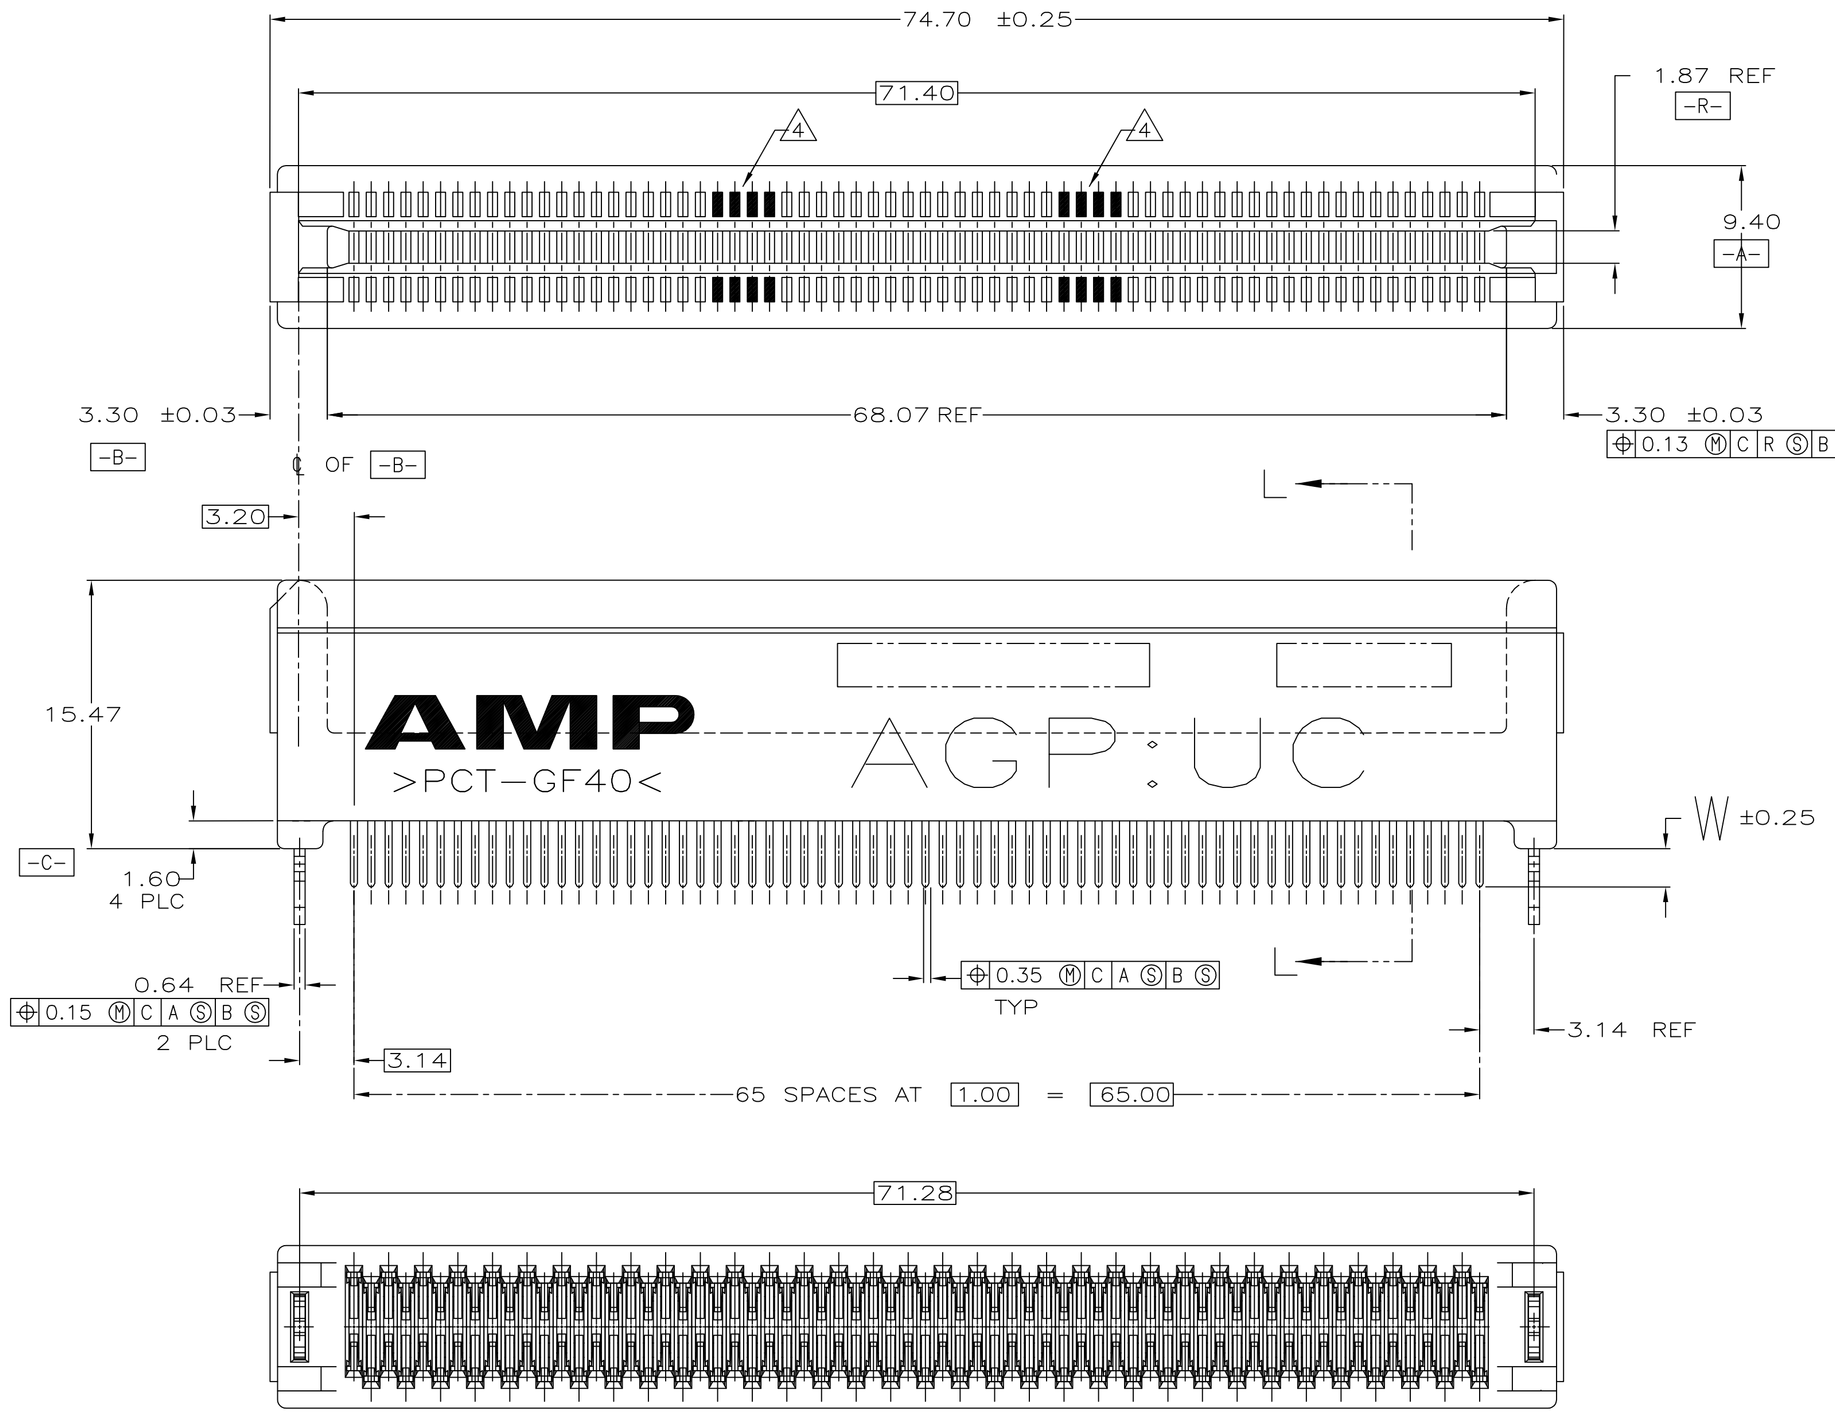

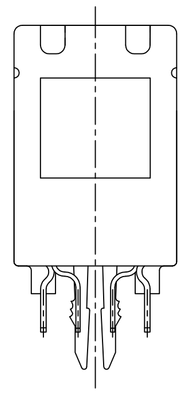

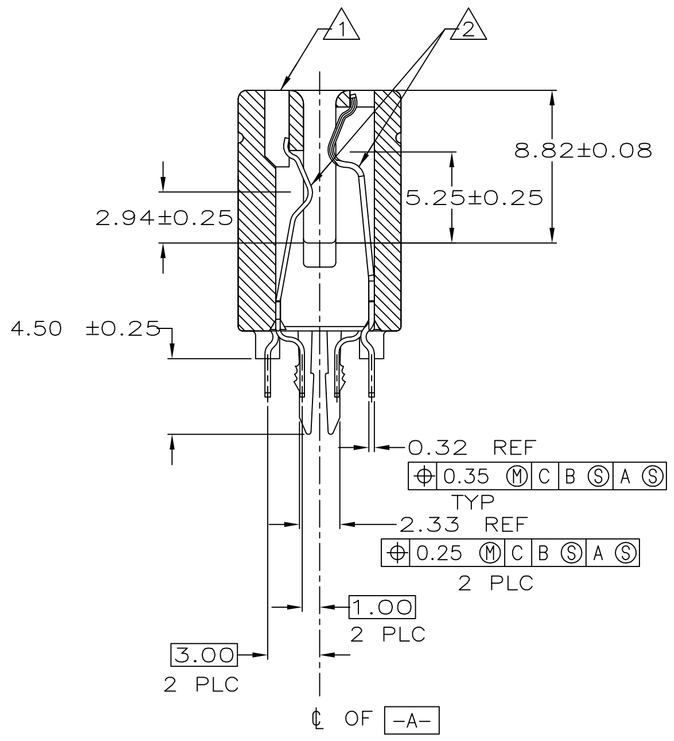

SECTION L—L

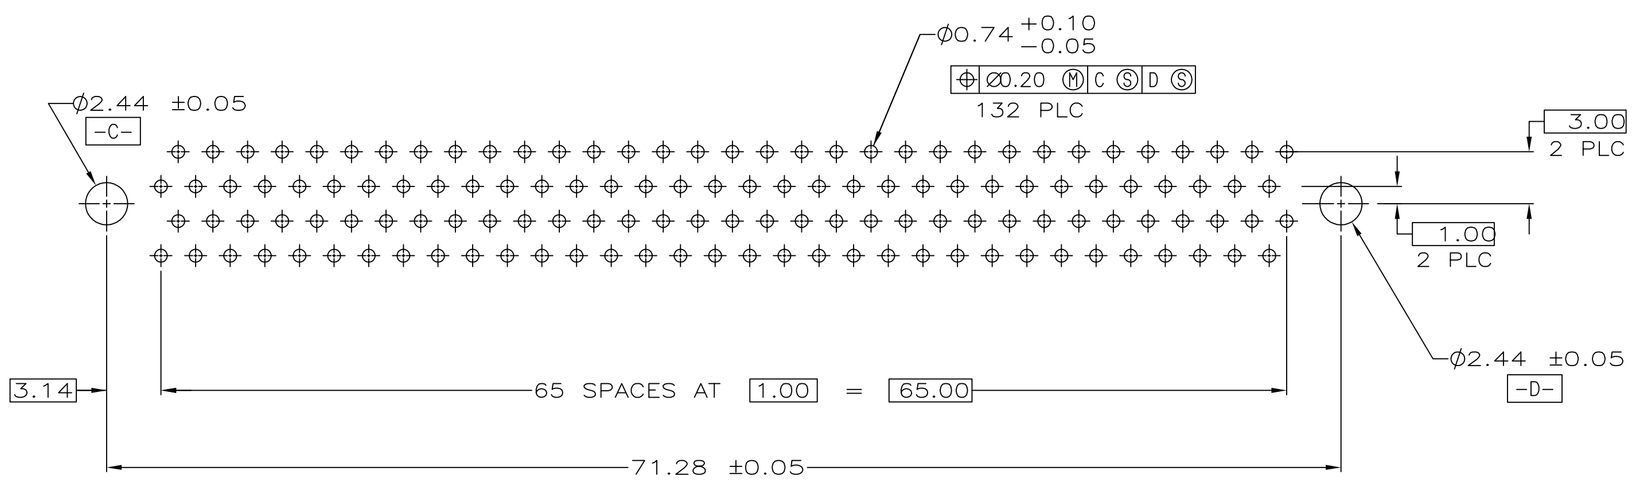

RECOMMENED CONNECTOR MOUNTING HOLE PATTERN
(CONNECTOR SIDE SHOWN)

1. MATERIAL: HOUSING, THERMOPLASTIC, COLOR: BROWN.
   CONTACTS, PHOSPHOR BRONZE.
   HOLD-DOWNS, BRASS.
2. FINISH: CONTACTS, 1.27 MIN. MICROMETERS NICKEL ALL OVER,
   0.38 MIN. MICROMETERS GOLD OVER NICKEL IN CONTACT AREA,
   2.54 MIN MICROMETERS TIN-LEAD OVER NICKEL ON SOLDER TAILS.
3. REFER TO INTEL ACCELERATED GRAPHICS PORT INTERFACE SPECIFICATION FOR RECOMMENDED MATING PAD PATTERNS FOR AGP 1X, 2X AND 4X BOARDS.
4. SHADED CONTACT LOCATIONS ARE AT RISK OF DAMAGE DURING MATING AND UNMATING WITH AGP-1X AND AGP-2X/4X CIRCUITS.
5. FINISH: CONTACTS, 1.27 MIN. MICROMETERS NICKEL ALL OVER,
   0.0254-0.0762 MICROMETERS GOLD OVER NICKEL IN CONTACT AREA.
   2.54 MIN. MICROMETERS TIN-LEAD OVER NICKEL ON SOLDER TAILS.

5	3.18	145376-6
5	2.54	145376-5
2	3.18	145376-3
2	2.54	145376-2
2	2.16	145376-1
PLATING	W	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±2°

MATERIAL 1

FINISH 2 5

DWN R BROWN 6/25/98
CHK D DIXON 6/25/98
APVD V RUMINSKI 6/25/98 NAME

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

AMP Incorporated
Harrisburg, PA 17105-3608

ASSEMBLY, 132 POSITION
1mm, CARD EDGE CONNECTOR

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-145376

CUSTOMER DRAWING

SCALE 4:1 | SHEET 1 OF 1 | REV 01

Translated 061110.094241 (YYMMDD.HHMMSS) from Computervision, Inc., Medusa Revision 12.2.5T