




- **SAW Frequency Stabilization**
- **Fundamental-Mode Oscillation at 750.0 MHz**
- **0.8" x 0.5" x 0.25" Metal Dip Case**

This general-purpose oscillator is stabilized by surface-acoustic-wave (SAW) technology. Fundamental oscillation at 750.0 MHz eliminates all internally generated spurious outputs except integral harmonics of 750.0 MHz. The compact size of the rugged, metal, hermetically-sealed case makes this oscillator suitable for a variety of applications.

HO1301

750.0 MHz SAW Oscillator



Dip 14-8 Case

Absolute Maximum Ratings

Rating		Value	Units
DC Supply Voltage		0 to +13	VDC
Ambient Temperature	Powered	-40 to +70	°C
	Storage	-40 to +85	

Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Operating Frequency	Absolute Frequency	f_O	1, 7	749.750	750.0	750.250	MHz
	Tolerance from 750.0 MHz	Δf_O				± 250	kHz
RF Output Power		P_O	3, 6	+7	+11	+13	dBm
Spurious Outputs	Second Harmonics		3, 6, 7			-15	dBc
	Third and Higher Harmonics					-20	
	Nonharmonic				<-80	-60	
RF Impedance	Nominal Impedance	Z_O	3		50		Ω
	Operating Load VSWR	G_L	3, 5			1.5:1	
DC Power Supply	Operating Voltage	V_{CC}	3, 6	7.9	8.4	8.9	VDC
	Operating Current	I_{CC}			30	40	mA
Operating Ambient Temperature		T_A	3, 6	-20		+60	°C
Lid Symbolization (YY=Year, WW=Week)				RFM HO1301 YYWW			




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. COCOM CAUTION: Approval by the U.S. Department of Commerce is required prior to export of this device.


Notes:

- One or more of the following United States patents apply: 4,616,197; 4,610,681; and 4,761,616.
- Unless noted otherwise, all specifications are listed at $T_A = +25^\circ\text{C} \pm 2^\circ\text{C}$, $V_{CC} = \text{nominal voltage} \pm 0.01 \text{ VDC}$, and load impedance = 50Ω with VSWR $\leq 1.5:1$.
- The design, manufacturing process, and specification of this device are subject to change without notice.
- Applies to oscillator only and not to sidebands caused by external electrical or mechanical sources. (Dedicated external voltage regulation with low-frequency filtering for the DC power supply and proper circuit board layout are recommended for optimum spectral purity.)
- For specified maximum operating load VSWR (any angle) at F_O . (No instability or damage will occur for any passive load impedance.)
- For any combination of V_{CC} and T_A within the specified operating ranges.
- Applies for any combination of Note 5 and 6 conditions.

BLOCK DIAGRAM




ELECTRICAL CONNECTIONS

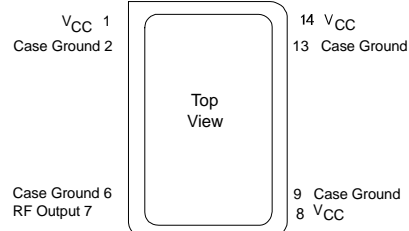

DIP14-8

Metal Dual-Inline Package with 8 leads in a 14-lead DIP configuration

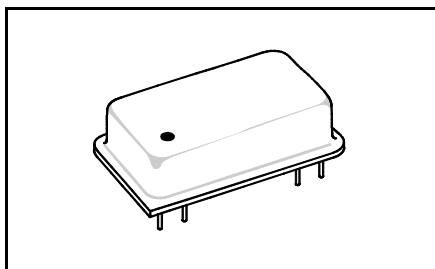

Dimension	mm		Inches	
	MIN	MAX	MIN	MAX
A	—	20.45	—	0.805
B	—	12.83	—	0.505
C	—	6.35	—	0.250
D	0.40	0.51	0.016	0.020
E	0.64 Nominal		0.025 Nominal	
F	7.62 Nominal		0.300 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	15.24 Nominal		0.600 Nominal	
K	5.97	6.73	0.235	0.265
L	1.30	—	0.051	—
M	—	11.18	—	0.440
N	—	18.80	—	0.740
R	1.75	2.26	0.069	0.089

