

High Reliability Mixer

ADEX-R10LH+

Level 10 (LO Power +10 dBm) 10 to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing

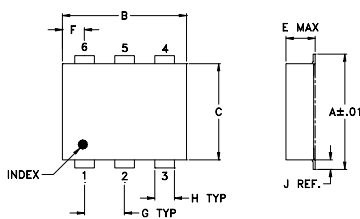

PCB Land Pattern



Suggested Layout,
Tolerance to be within ±0.02


Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-03

Suggested PCB Layout (PL-052)

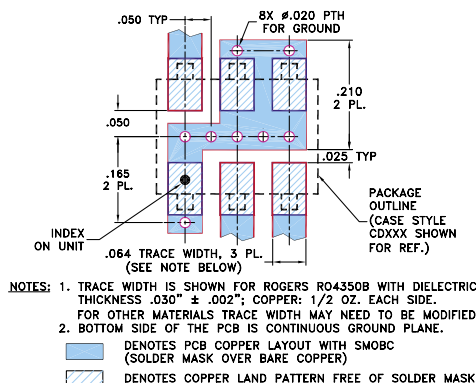

Features

- hermetically sealed ceramic quad
- low conversion loss, 7.0 dB typ.
- excellent L-R isolation, 60 dB typ.
- good VSWR, 1.8:1 typ. for LO, 1.5:1 typ. for RF, 1.5:1 typ. for IF
- good performance to 1500 MHz
- low profile package
- aqueous washable
- protected by US Patent 6,133,525 and 6,947,717

Applications

- cellular
- instrumentation
- VHF/UHF receivers

CASE STYLE: CD542

PRICE: \$3.35 ea. QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)				IP3 at center band (dBm)		
LO/RF f_L - f_U	IF	Mid-Band m		Total Range Max.		L	M	U	L	M	U	L	M	U				
		$\bar{X}$	σ	Max.	Max.													
		Typ.	Min.	Typ.	Min.										Typ.		Min.	Typ.
10-1000	DC-800	7.0	0.10	7.8 ¹	8.3 ¹	70	55	60	43	47	37	45	32	35	25	26	17	16


1 dB COMP.: +5 dBm typ.

¹Conversion loss increases 0.5 when IF is above 150 MHzL = low range [f_L to 10 f_L]M = mid range [10 f_L to $f_U/2$]U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
10.10	40.10	6.40	70.41	63.96	1.40	1.53
70.10	100.10	7.05	71.47	48.53	1.41	1.51
130.10	160.10	7.08	67.22	44.08	1.42	1.52
190.10	220.10	6.89	66.26	42.14	1.42	1.50
250.10	280.10	7.03	65.92	42.34	1.44	1.52
310.10	340.10	6.97	64.97	41.47	1.46	1.55
370.10	400.10	7.00	61.87	40.62	1.49	1.57
430.10	460.10	6.96	60.97	38.57	1.51	1.60
490.10	520.10	7.00	62.56	37.21	1.53	1.65
550.10	580.10	7.16	56.40	35.22	1.56	1.69
610.10	640.10	7.09	52.53	33.19	1.55	1.72
670.10	700.10	6.94	55.81	31.14	1.54	1.74
730.10	760.10	7.16	57.09	30.24	1.58	1.81
790.10	820.10	7.30	57.93	30.30	1.61	1.86
850.10	880.10	7.52	52.89	30.93	1.64	1.89
910.10	940.10	7.81	50.96	30.99	1.65	1.92
970.10	1000.10	7.81	55.37	29.61	1.62	1.94
1030.10	1060.10	7.66	61.99	27.44	1.54	1.96
1090.10	1120.10	7.44	62.69	25.31	1.43	1.99
1150.10	1180.10	7.17	51.89	23.66	1.32	2.06

Electrical Schematic

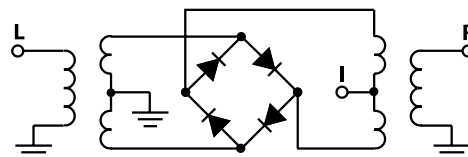

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M109914
ADEX-R10LH+
ED-12873/5
WL/TD/QL
070516
Page 1 of 2

