

SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE	12	Vdc	
OPERATING VOLTAGE RANGE	3 ~ 16	Vdc	
RATED CURRENT (MAX)	8	mA	
MINIMUM SPL @ 10 CM	100	dBA	
RESONANT FREQUENCY	$3,700 \pm 500$	Hz	
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec	
OPERATING TEMPERATURE	-20 ~ +60	°C	
STORAGE TEMPERATURE	-30 ~ +70	°C	
HOUSING MATERIAL	ABS	-	
TERMINAL MATERIAL	LEAD WIRE	-	
WEIGHT	5	grams	

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

0		REVISION HISTORY		
	LTR	TR DESCRIPTION		APPROVED
	-	RELEASED FROM ENGINEERING	10/26/2005	
	Α	ADDED SOUND EMISSION HOLE DIAMETER	3/3/2008	R.W.
	В	CORRECTED WIRE LENGTH	2/11/2010	B.R.
	C REVISED TO INVENTOR 3-D DRAWING TEMPLATE		5/2/2010	B.R.
D REVISED TOLERANCES O		REVISED TOLERANCES ON HOLE TO HOLE & HOLES	8/6/2010	B.R.

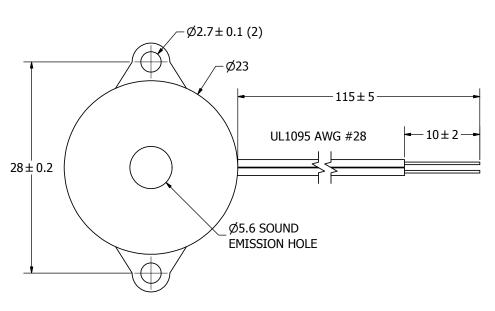

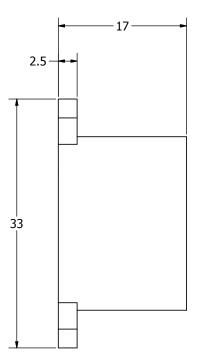



## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by
	SIZE	J.A.F.
DIMENSIONS ARE IN MILLIMETERS,		$\sim$
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	<b>A</b> 3	
AI-2337-TF-L\	W115-R.idw	

	pui,	
,	a projects unlimited co	) Inc ompany

Designed by Date 1.A.F. 10/26/2005

Checked by	Date	Approved by	Date	Drawn Date
E.P.	10/26/2005	B.R.	10/26/2005	5/2/2010
AT-2337-TF-I W115-R				

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

**PUI** Audio:

AI-2337-TF-LW115-R