

"High Frequency Ceramic Solutions"

910 MHz Directional Coupler/ Low Pass Filter Combination

P/N 0910CF15A0100

Detail Specification: 10/13/08

Page 1 of 4

General Specifications

Part Number	0910CF15A0100
Frequency (MHz)	860 - 960
Attenuation (min.)	30 dB @ 2 x Fo
Attenuation (min.)	30 dB @ 3 x Fo
Attenuation (min.)	30 dB @ 4 x Fo
Attenuation (min.)	30 dB @ 5 x Fo
Insertion Loss	1 dB max.

Return Loss	20 dB min.
Coupling	13 ± 1 dB
Isolation	30 dB min.
Impedance	50 Ω
Operating and Storage Temp	-40 to +85°C
Reel Quantity	4000

P/N	Packaging Style	Bulk	Suffix = S	Eg. 0910CF15A0100
		T & R	Suffix = E	Eg. 0910CF15A0100
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 0910CF15A0100(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 0910CF15A0100(E or S)/Pb


Terminal Configuration

No.	Function
1	Termination
2	GND
3	GND
4	Input
5	Coupled Out
6	GND
7	GND
8	Output

Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.027 ± 0.004	0.70 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

Case Size: 15-2B




Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mils

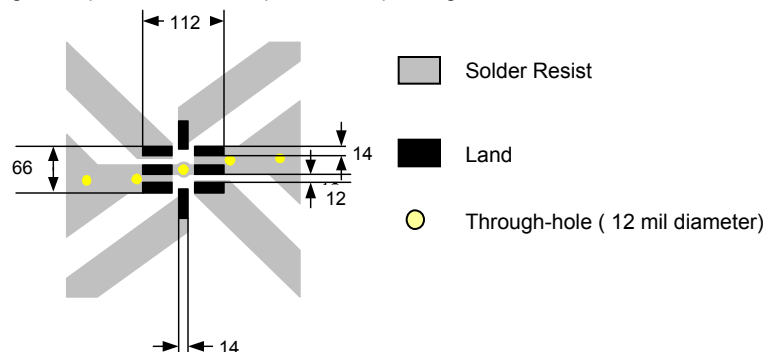

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


910 MHz Directional Coupler/ Low Pass Filter Combination

P/N 0910CF15A0100

Detail Specification: 10/13/08

Page 2 of 4

Typical Electrical Performance (T=25°C)

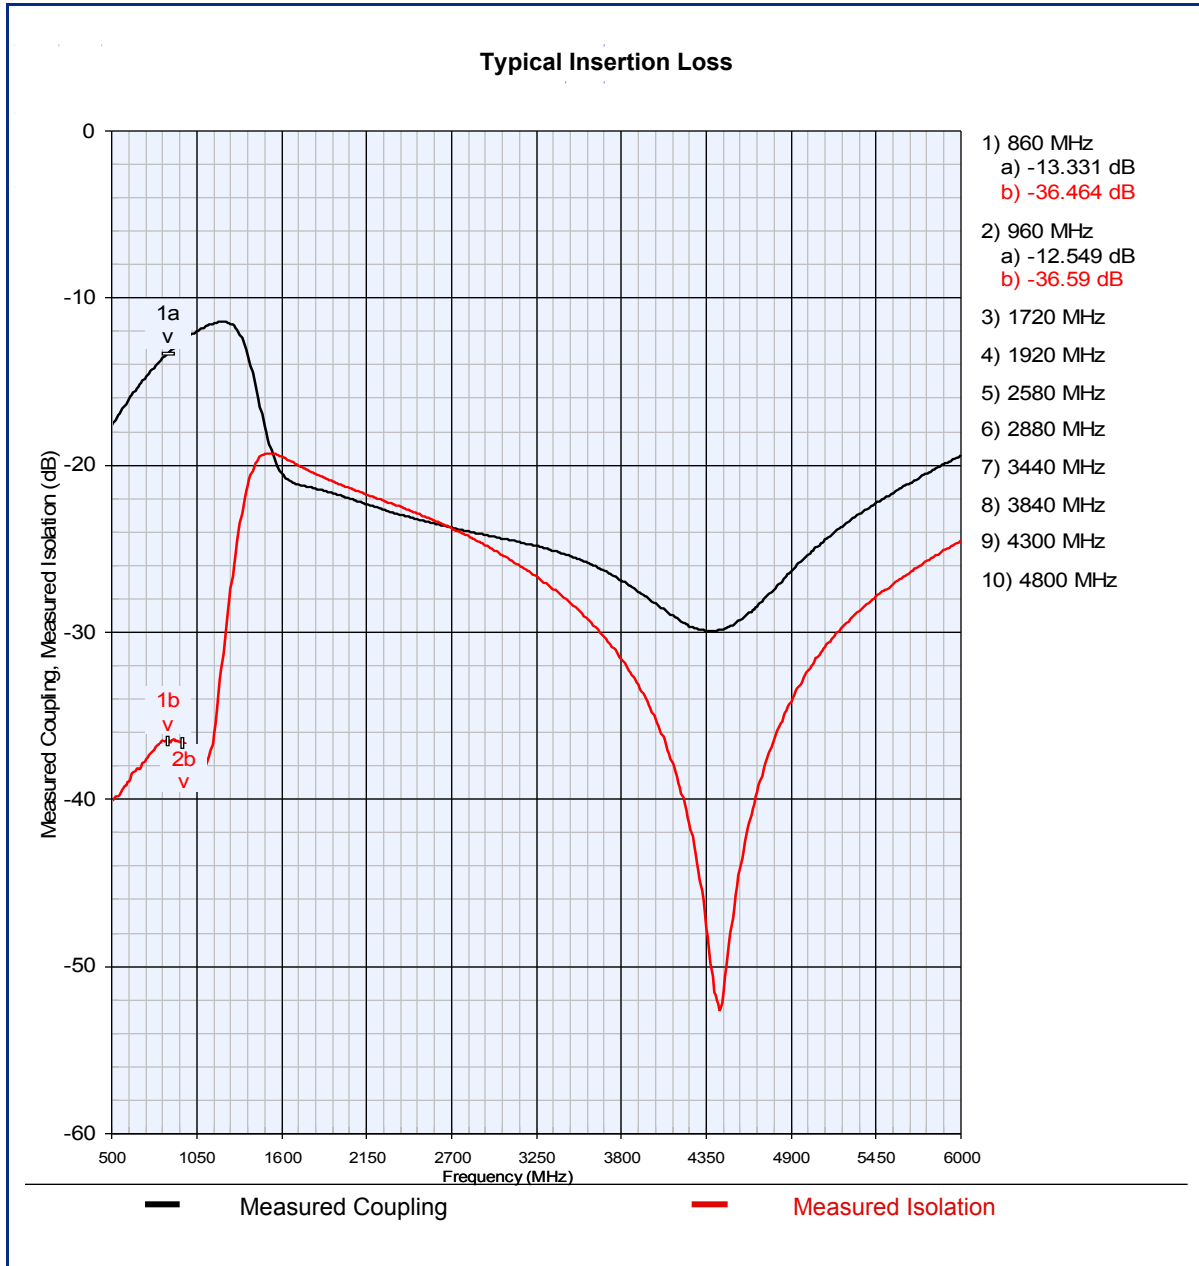

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


910 MHz Directional Coupler/ Low Pass Filter Combination

P/N 0910CF15A0100

Detail Specification: 10/13/08

Page 3 of 4

Typical Electrical Performance (T=25°C)

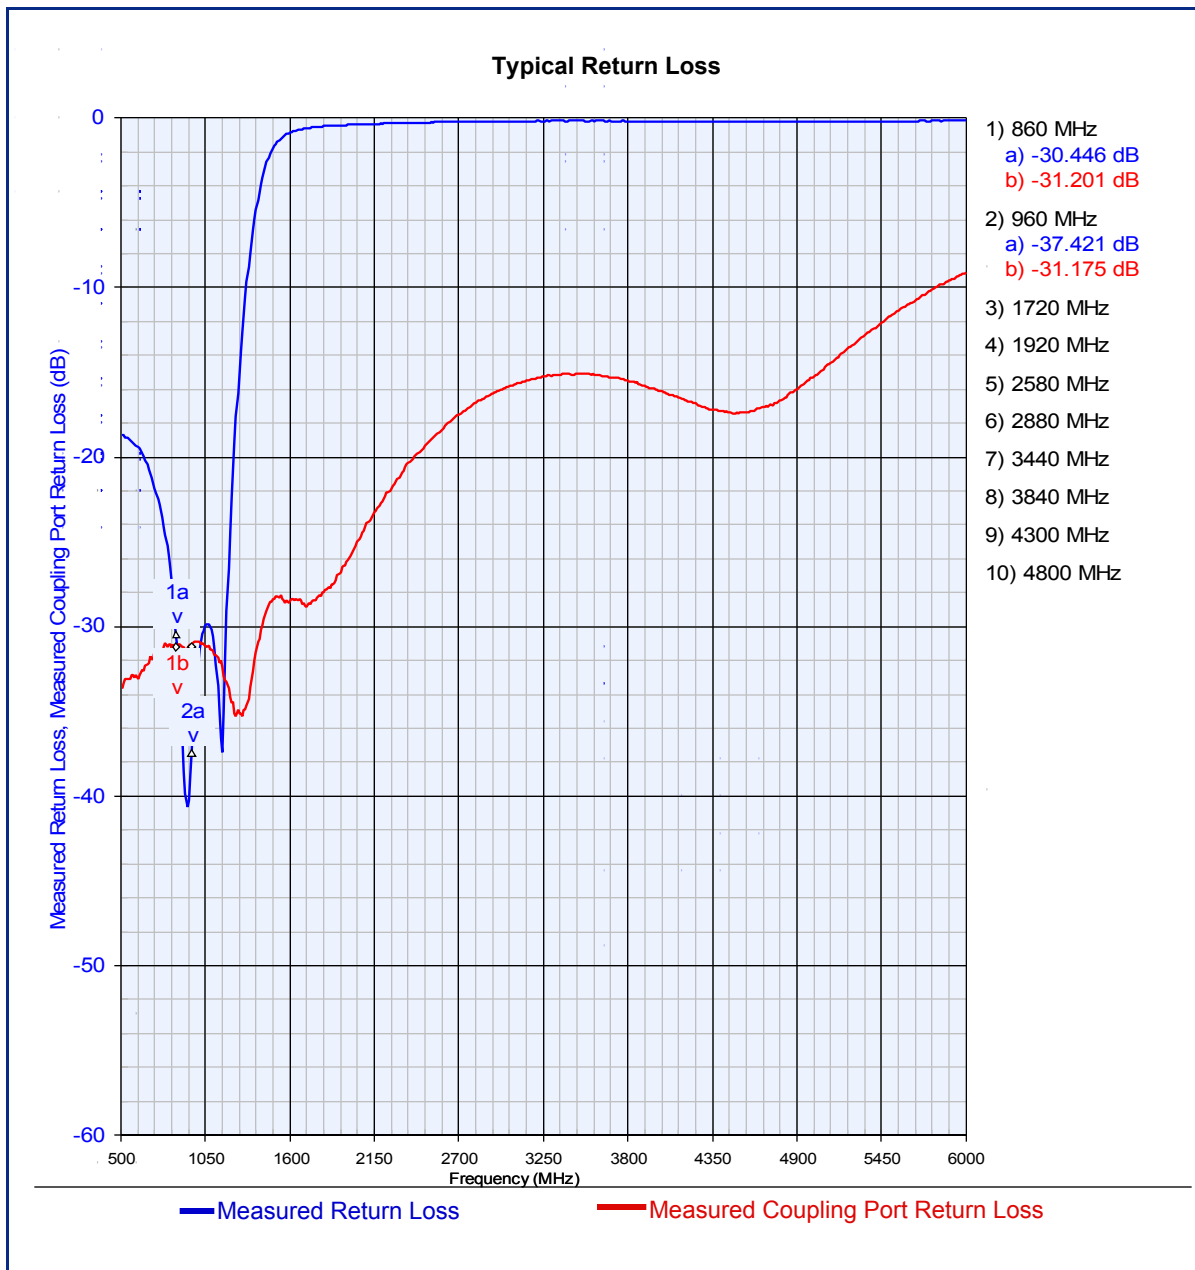

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


910 MHz Directional Coupler/ Low Pass Filter Combination

P/N 0910CF15A0100

Detail Specification: 10/13/08

Page 4 of 4

Typical Electrical Performance (T=25°C)

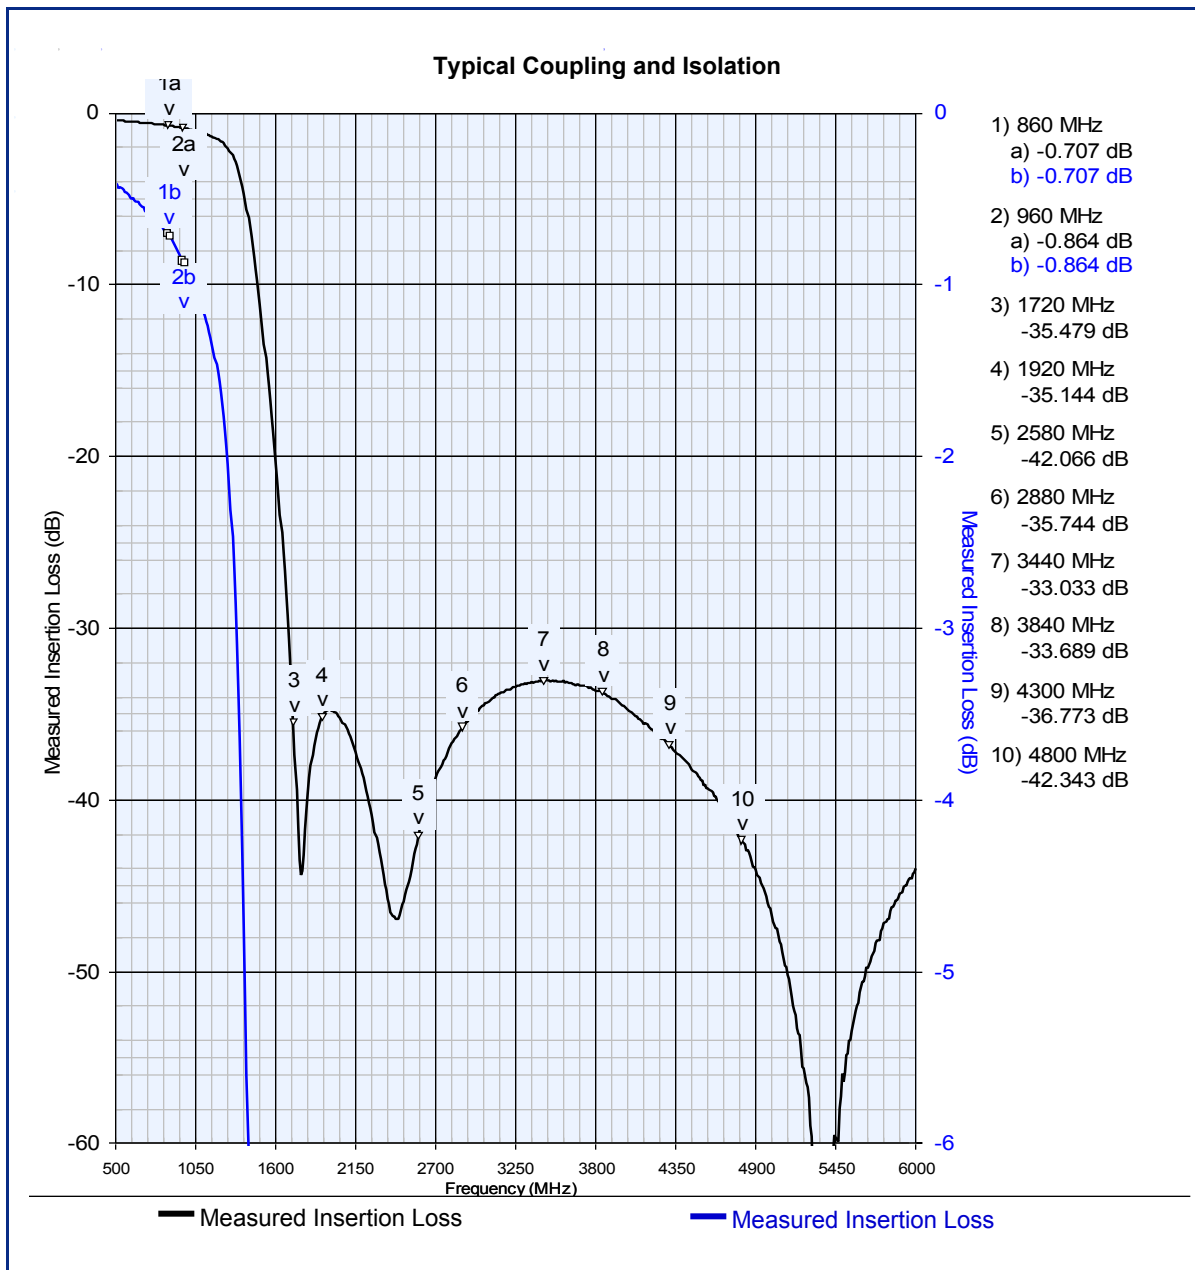

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved