



HER101G THRU HER108G


CURRENT 1.0 Ampere
VOLTAGE 50 to 1000 Volts

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability
- High reliability
- Low power loss, high efficiency
- Glass passivated junction
- High speed switching
- Low leakage

Mechanical Data

- Case : JEDEC DO-41 molded plastic body
- Epoxy : UL94V-0 rate flame retardant
- Lead : Plated axial lead solderable per MIL-STR-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.012 ounce, 0.33 gram

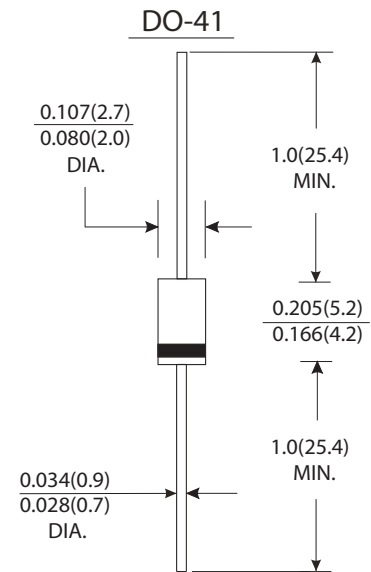

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	HER 101G	HER 102G	HER 103G	HER 104G	HER 105G	HER 106G	HER 107G	HER 108G	Units
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length @ at T _A =55°C	I <sub(av)< sub=""></sub(av)<>	1.0								Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0								Amps
Maximum instantaneous forward voltage at 1.0A	V _F	1.0		1.3		1.7			Volts	
Maximum DC reverse current at rated DC blocking voltage T _A =25°C	I _R	5.0								μA
Maximum DC reverse current at rated DC blocking voltage T _A =125°C		100								
Maximum reverse recovery time (Note 1)	T _{rr}	50					75			ns
Typical junction capacitance (Note 2)	C _J	20					15			pF
Operating junction and storage temperature range	T _J T _{STG}	-65 to +150								°C

Notes:

- (1) Test conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.



RATINGS AND CHARACTERISTIC CURVES HER101G THRU HER108G

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

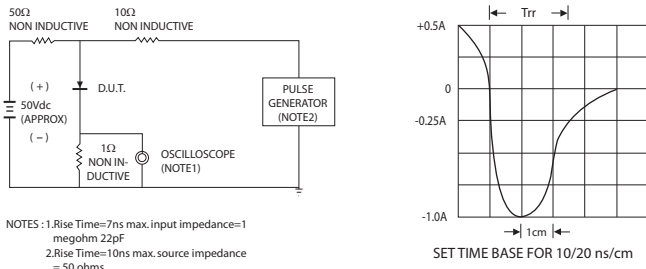


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

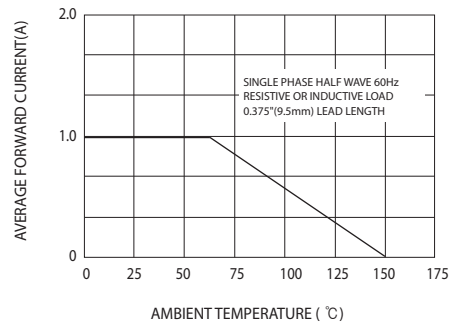


FIG.3-TYPICAL FORWARD CHARACTERISTICS

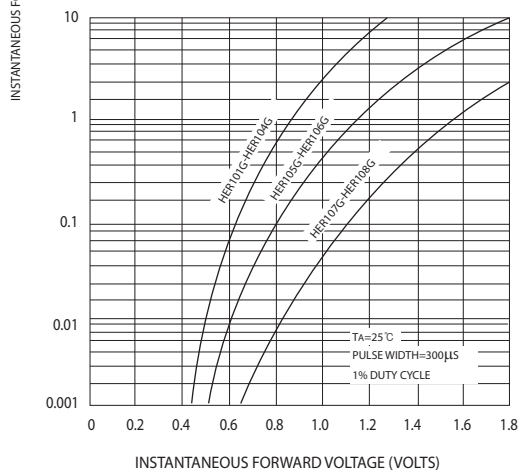


FIG.4-TYPICAL REVERSE CHARACTERISTICS

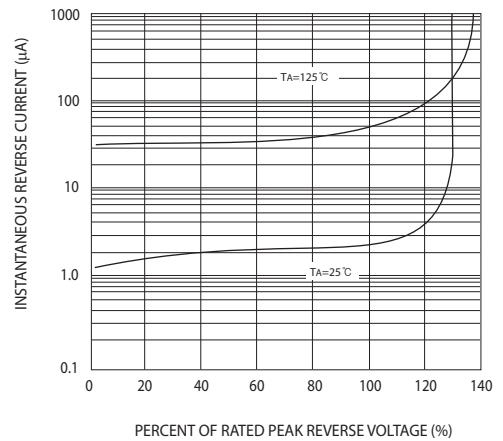


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

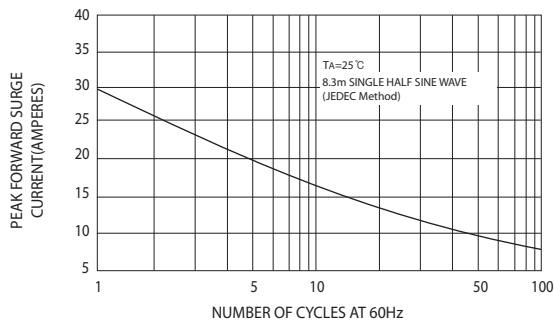


FIG.6-TYPICAL JUNCTION CAPACITANCE

