


pre-molded sleeve - for bundles up to .430" (10,9mm)



WITH INTERNAL FRICTION GRIP Exterior PVC sheath pre-molded over ferrite suppressor. Assembles to cable prior to termination by threading in one end and out the other. Neutral gray standard color. Five sizes accommodate cable diameters from .200" to .430" (5,1 to 10,9mm). The preferred alternative to cable over-molding, shrink tubing, taping, tie wraps and other costly secondary installation operations. A drop of water in the I.D. during assembly will facilitate sliding into position.



Patent No. 5,200,730

PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS
PM28B3375	.192 4,8	.290 7,4	.465 11,8	2.01 51,1	.250 6,4	.960 24,4	.800 20,3	140 @ 100MHz
PM28B0625	.310 7,9	.400 10,2	.715 18,2	1.82 46,2	.250 6,4	.772 19,6	.800 20,3	120 @ 100MHz
PM28B1625	.310 7,9	.400 10,2	.715 18,2	2.38 60,5	.250 6,4	1.335 33,9	.800 20,3	225 @ 100MHz
PM28B0686	.375 9,5	.465 11,8	.776 19,7	2.38 60,5	.250 6,4	1.335 33,9	.800 20,3	196 @ 100MHz
PM28B0736	.430 10,9	.520 13,2	.776 19,7	2.38 60,5	.250 6,4	1.335 33,9	.800 20,3	176 @ 100MHz

performance by part number:

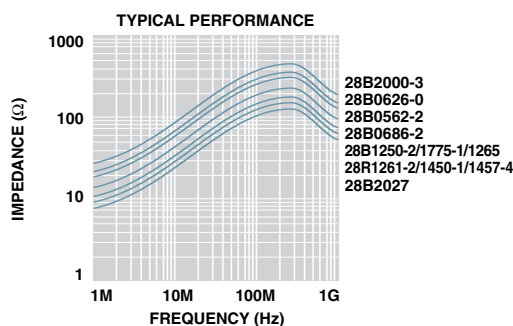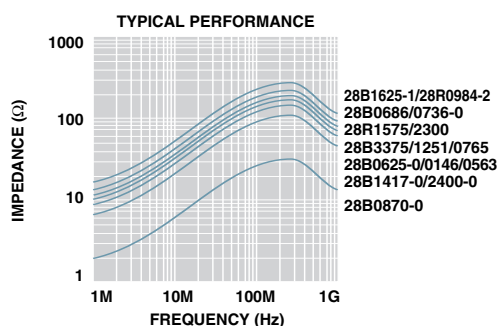

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LeaderTech:](#)

[PM28B3375](#) [PM28B0736](#) [PM28B0686](#) [PM28B0625](#) [PM28B1625](#)