

# GCT Series – 4 to 20mA loop Gage Heads



- 4-20mA loop, two wire operation
- Hermetically sealed housing
- 25 µ-inch [0.6 µm] repeatability
- IEC IP68 rating to 1,000 PSI [70 bars]
- Stroke ranges from 0.250 up to 2 inches
- Reverse polarity protection
- Hardened tool steel contact tip
- High side load resistance

## DESCRIPTION

The **GCT Series** heavy-duty gage heads enable high performance in environments containing moisture, dirt, and fluid contaminants. With a spring loaded LVDT, a precision linear bearing, and internal signal conditioning electronics operating on a 4 to 20mA loop, the GCT is ideal for difficult industrial environments and remote locations where sensor power is not readily available and long cable runs are expected. The 4-20mA signal is less susceptible to EMI and RFI interference than low amplitude AC or DC signals.

These robust gage heads allow measurements over stroke ranges from 0 to 0.250 inch [6.35mm] up to 0 to 2 inches [50.8mm]. The spring force is typically 9oz [255 grams] at fully compressed electrical stroke. A removable black-chromed, hardened tool steel tip is threaded (4-48UNF-2A) to the working end. Internal construction prevents the core and shaft from rotating as they move longitudinally. The integral electrical connector (welded) provides for easy installation and allows replacing a damaged cable without sacrificing the sensor. Installation and adjustment are facilitated by an external ½-20 mounting thread and the two locknuts supplied with each unit.

Like in most of our LVDTs, the GCT windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high vibration and shock.

The ruggedness, long life cycle, and very high reliability of the GCT Series provide the lowest cost of ownership over the life of the equipment onto which they are installed. The one-piece front end (barrel which contains the bearing assembly), machined from solid stainless steel bar, coupled with a bronze bushing, has far greater resistance to bending forces and side loads compared to other designs. This is particularly important on the longer stroke versions; it reduces the common risk of probe damage/bending during installation or maintenance of industrial equipment. The GCT Series designs also require fewer parts and weld joints, thereby increasing overall structural integrity and reliability.

MEAS offers options, such as mating connector plugs, special contact tips (including AGD dial indicator tips), air-extend/spring retract, and cable assemblies. Also see our other models with built-in signal conditioning, **GCD** (bipolar DC voltage), **GCD-SE** (single-ended DC voltage) and **GC-485** (RS-485 Digital Series), as well as the AC operated **GCA**.

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

## FEATURES

- All-welded stainless steel construction
- Resistant to harsh environments
- MS type connector (MIL-C-5015)
- Long cycle life
- Reverse polarity protection
- Calibration certificate supplied with each unit
- Air extend/spring retract available (*Consult factory*)

## APPLICATIONS

- Bridge expansion monitoring
- Pipeline vibration monitoring
- Valve position
- Compressor feedback
- Noisy environments / long cable runs
- In-process measurements (feedback loop with PLC or CNC controller)

# GCT Series – 4 to 20mA loop Gage Heads

## PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS				
Parameter	GCT 250	GCT 500	GCT 1000	GCT 2000
Stroke/gaging range	0.25 [6.4]	0.50 [12.7]	1 [25.4]	2 [50.8]
Sensitivity, mA per inch	64	32	16	8
Loop supply voltage	10.5 to 28VDC			
Output	4 to 20mA, two wire loop (Output increases when core is displaced towards connector)			
Output at null position	12mA (null position is defined as the mid-stroke position)			
Maximum loop resistance	540 ohms @ 24VDC (see loop resistance chart below)			
Non-linearity	±0.5% of FR, maximum			
Output noise and ripple	25 µA RMS maximum			
Repeatability	25 µ-inch [0.6 µm]			
Stability	0.1% of FSO after 30 minute warm up			
Temperature coefficient of sensitivity	0.022%/°F [0.04%/°C]			
Frequency response (dynamic)	15 Hz, maximum			

ENVIRONMENTAL SPECIFICATIONS & MATERIALS	
Operating temperature	-13°F to +185°F [-25°C to 85°C]
Survival temperature	-65°F to +250°F [-55°C to 125°C]
Shock survival	250 g (11ms half-sine)
Vibration tolerance	10 g up to 2kHz
Housing material	AISI 400 Series stainless steel
Electrical connector	6-pin MS type connector (MIL-C-5015)
IEC 60529 rating	IP68 to 1,000 PSI [70 bars] with use of proper mating connector plug

### Notes:


All values are nominal unless otherwise noted

Dimensions are in inch [mm] unless otherwise noted


FR: Full Range is the stroke range, end to end; FR=S for a 0 to S stroke range

FSO (Full Scale Output): Largest absolute value of the outputs measured at the ends of the range

## WIRING SCHEMATIC & LOOP RESISTANCE

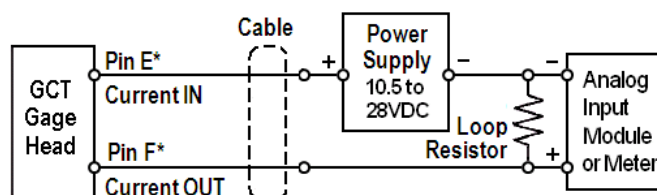


\* Pins A through D: No connection

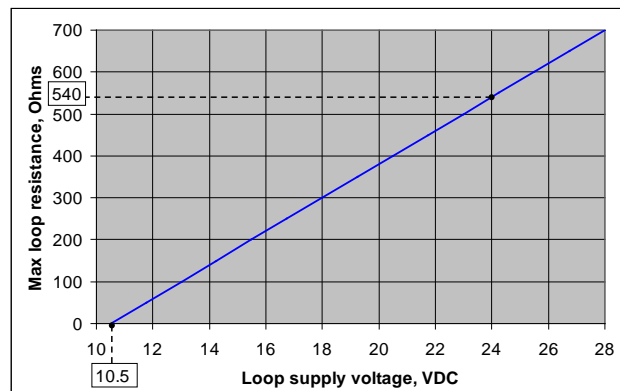


# GCT Series – 4 to 20mA loop Gage Heads

## MECHANICAL SPECIFICATIONS

Parameter	GCT 250	GCT 500	GCT 1000	GCT 2000
Stroke/gaging range	0.25 [6.4]	0.50 [12.7]	1 [25.4]	2 [50.8]
Pre-travel	0.20 [5.1]	0.20 [5.1]	0.15 [3.8]	0.20 [5.1]
Over-travel	0.25 [6.3]	0.05 [1.3]	0.20 [5.1]	0.05 [1.3]
Main body length "A"	4.66 [118.4]	5.79 [147.1]	7.20 [182.9]	9.45 [240.0]
Overall body length "B"	6.03 [153.2]	7.15 [181.6]	10.17 [258.3]	12.43 [315.7]
Plunger length "C" (4mA position, reference only)	6.72 [170.7]	7.68 [195.1]	11.97 [304.0]	13.66 [347.0]
Plunger length "D" (fully extended/"4mA" side)	7.06 [179.3]	8.18 [207.8]	12.65 [321.3]	14.9 [378.5]
Spring force	Typically 9oz [255 grams] at fully compressed electrical stroke			

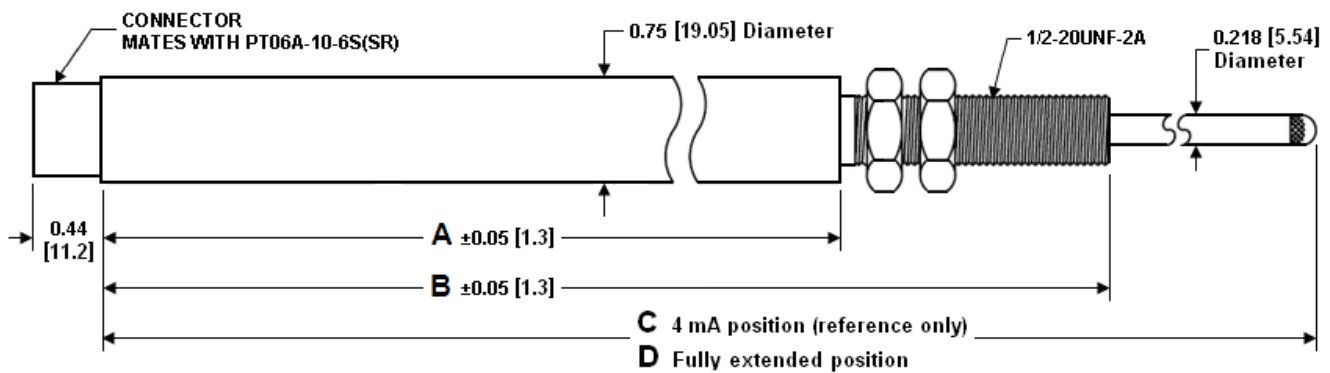

## REPLACEMENT/OPTIONAL CONTACT TIPS

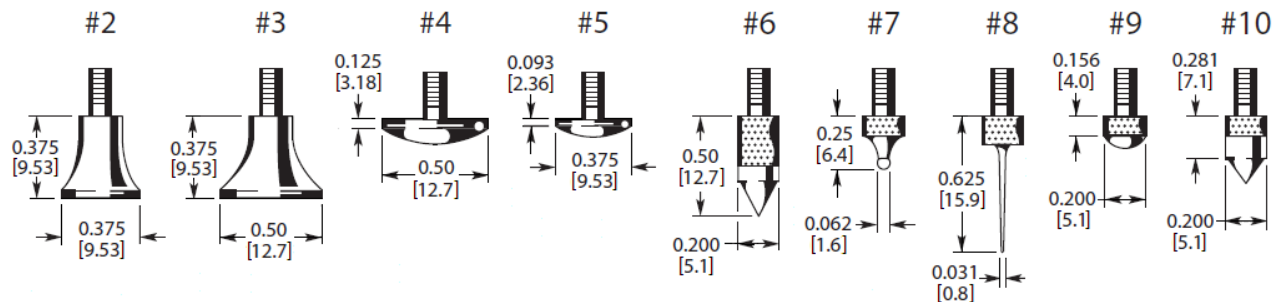

Dimensions are in inch [mm]

# GCT Series – 4 to 20mA loop Gage Heads

## ORDERING INFORMATION

Description	Model	Part Number
0 to 0.25 inch gage head	GCT 250	72350000-000
0 to 0.5 inch gage head	GCT 500	72350001-000
0 to 1 inch gage head	GCT 1000	72350002-000
0 to 2 inch gage head	GCT 2000	72350003-000
<b>OPTIONS</b>		
Air extend/spring retract gage head ( <i>Consult factory</i> )	All GC Series	XXXXXXXX-150
<b>ACCESSORIES</b>		
DC power supply (15VDC)	PSD 40-15	02291339-000
Mating connector kit	PT06A-10-6S(SR)	62101011-000
Replacement contact tips	Contact Tip 2	67010005-000
	Contact Tip 3	67010006-000
	Contact Tip 4	67010002-000
	Contact Tip 5	67010007-000
	Contact Tip 6	67010008-000
	Contact Tip 7	67010009-000
	Contact Tip 8	67010010-000
	Contact Tip 9	67010001-000
	Contact Tip 10	67010011-000

Refer to our [“Options and Accessories for Gage Head”](#) data sheet.

## TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: <a href="mailto:sales@meas-spec.com">sales@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: <a href="mailto:info.de@meas-spec.com">info.de@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: <a href="mailto:info.cn@meas-spec.com">info.cn@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.