

#### Approvals



#### Life expectancy




L-10 LIFE AT 40°C:  
80 000 hours

#### AC Motor

Electrical protection: impedance protected  
Housing material: zamak  
Impeller material: plastic UL 94 VO  
Weight: 395 g  
Bearing system: ball bearings

#### Available with:

- Flying leads
- Speed sensor

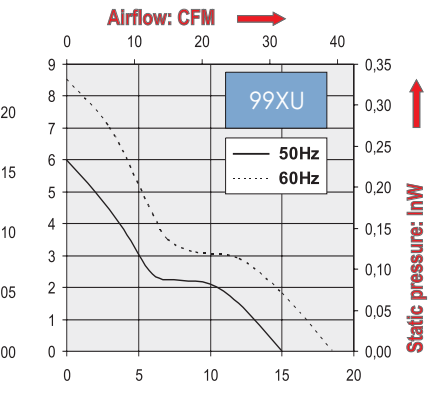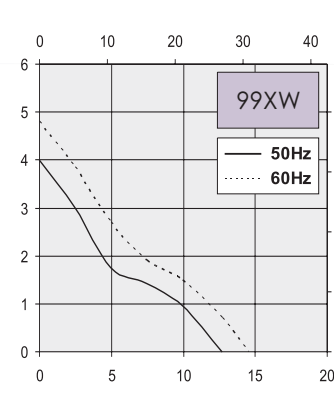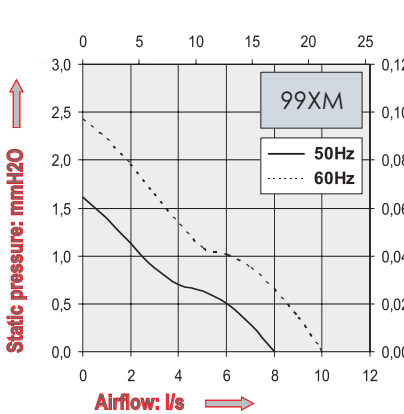

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor	Input Power	Nominal current	Starting current	Connection type		Operating temperature	
	V										l/s	dB(A)	RPM	Hz
99XM0182000	115	8	21	1500	50	1		7	75	80		X	-10	70
		10	25,5	1800	60	1		6	65	70		X	-10	70
99XM0181000	208-240	8	21	1500	50	1		8	40	45		X	-10	70
		10	25,5	1800	60	1		7	35	40		X	-10	70
99XW0182000	115	12	32	2200	50	1		8	85	100		X	-10	70
		14	35,5	2500	60	1		6	70	90		X	-10	70
99XW0181000	208-240	12	32	2200	50	1		9	50	60		X	-10	70
		14	35,5	2500	60	1		7	40	50		X	-10	70
99XU0181000	208-240	15	38	2700	50	1		14	70	100		X	-10	70
		18,5	42	3200	60	1		11	60	90		X	-10	70

#### Additional versions:

Salt spray protected - shock and vibration protected - marine specifications - wide temperature range  
IP54: consult factory

#### Accessories:

Refer to Accessories leaflet