

# OFC

## **OFC-740X Series** Modularized Open Frame Computer with Pentium® 4 Solution

### **Features and Benefits:**

- Supports Intel® Pentium® 4 / Pentium® 4-M / Celeron® CPU up to 2.8 GHz
- 17" 15" 12" LCD display and high performance solution
- Follow customer need make front bezel
- High precision touchscreen
- Supports Gigabit LAN
- Optional IDE interface, Type II CompactFlash slot or horizontal DOM
- Optional 1 x ISA / 1 x PCI Riser Card Module
- Optional slim FDD / slim CD-ROM Drive



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: [sales@protech.com.tw](mailto:sales@protech.com.tw)

<http://www.protech.com.tw>




**ISO CERTIFIED**  
**9001 14001**


# OFC-740X Series

Modularized Open Frame Computer with Pentium® 4 Solution


Front View

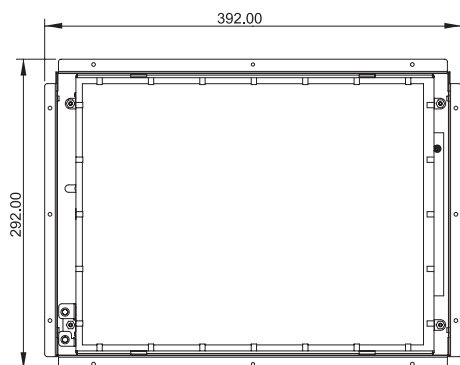

Rear View

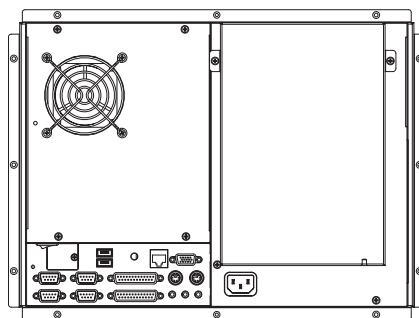

Side View

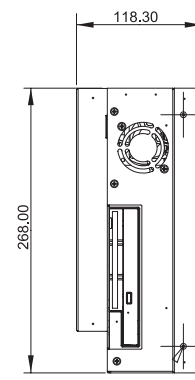

Unit: mm

## Specification

System	
<b>CPU Type</b>	Intel® Pentium® 4 / Pentium® 4-M / Celeron® Up to 2.8GHz
<b>Memory Support</b>	1 x DIMM, DDR333 memory up to 1GB max.
<b>Open Frame</b>	Yes
<b>Power Supply</b>	AC 200W power supply
<b>O.S. Support</b>	Win 98SE / 2000 / XP, Linux Redhat 8.0/9.0
<b>System Weight</b>	17" : 13 kg (28.66lb) 15" & 12" : 9.5 kg (21.38lb)
<b>Dimension (WxHxD)</b>	17" : 440 x 344 x 107 mm (17.32" x 13.54" x 4.21") 15" & 12" : 400 x 300 x 99 mm (15.6" x 11.7" x 3.89")
<b>VESA Mounting Support</b>	Only 15" & 12" 75mm / 100mm VESA bracket (optional)
<b>Certificate</b>	17" & 15" : CE / FCC / LVD / UL 12" : CE / FCC / LVD

## I/O Ports

<b>USB</b>	2 x USB 2.0
<b>KB / Mouse</b>	2
<b>Audio</b>	Line in / Line out / MIC in
<b>Parallel</b>	1 x parallel port (SPP / EPP / ECP)
<b>Serial Ports</b>	4 x COMs (pin 9 support +5V or +12V), COM2 for RS232/422/485
<b>LAN</b>	10/100/1000 Mbps
<b>VGA</b>	1
<b>Drive Bay</b>	1 x 3.5" HDD, 1 x slim CD-ROM, 1 x slim FDD
<b>Expansion Slots</b>	1 x PCI + 1 x ISA (optional)

## Display

<b>LCD</b>	17" SXGA, 15" XGA, 12" SVGA
<b>Touch Screen</b>	7W Analog resistive (USB interface)

## Environment

<b>Operating Temp.</b>	0° ~ 40°C
<b>Storage Temp.</b>	-20° ~ 60°C
<b>Humidity</b>	20% ~ 90%

## Ordering Information

<b>OFC-7407</b>	Open Frame with 17" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
<b>OFC-7405</b>	Open Frame with 15" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
<b>OFC-7402</b>	Open Frame with 12" LCD, S478 P-4 CPU board, resistive touchscreen, 200W AC power supply
<b>PPC-7400-1P11</b>	1 x PCI + 1 x ISA riser card for OFC-740X
<b>PPC-VESAKIT</b>	VESA bracket

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in DEC, 2006