


1571004-5 Product Details

[Live Product Chat](#)

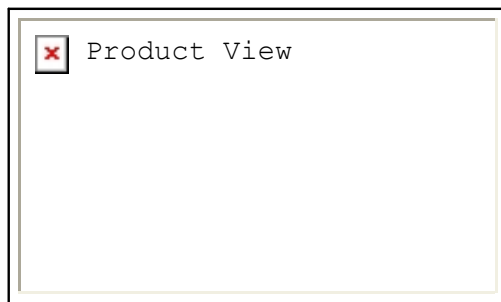

1571004-5

TE Internal Number: 1571004-5

Superseded

[Search for Replacement Parts](#)

Slide Switches

[Not EU RoHS or ELV Compliant](#) ([Find RoHS Compliant Alternates](#))

Product Highlights:

- Number of Positions = 3
- Single Pole - Double Throw Configuration (Pole-Throw)
- Actuator Style = Side
- Actuator Color = Yellow
- SE Series

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [SWITCH, SLIDE, SURFACE MOUNT SE\(**\)SMT](#) (PDF, English)

Catalog Pages/Data Sheets:

- [ALCOSWITCH PRODUCTS](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Number of Positions](#) = 3
- Configuration (Pole-Throw) = Single Pole - Double Throw
- Actuator Style = Side
- Mount Angle = Right Angle
- Grade = Instrumentation
- Termination Type = PC

Electrical Characteristics:

- Contact Rating = 0.4VA

Body Related Features:

- Actuator Color = Yellow
- Series = SE
- Mount Style = Surface Mount
- Switch Style = Process Sealed
- Actuator Material = Thermoplastic
- Flammability Rating = UL 94-HB
- Actuator Travel = 2.20 [.087]

Contact Related Features:

- Contact Plating = Gold

Configuration Related Features:

- Terminal Configuration = Standard
- Operating Function = On Off On
- Number of Actuators = Single
- Process Seal Material = Silicone Rubber
- Terminals Connected = 1-2, 2-3

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Reflow solder capable to 245°C, Reflow solder capable to 260°C

Identification Marking:

- Stamped Marking = With

Packaging Related Features:

- Packaging Method = Tape & Reel

Other:

- Brand = Alcoswitch