



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


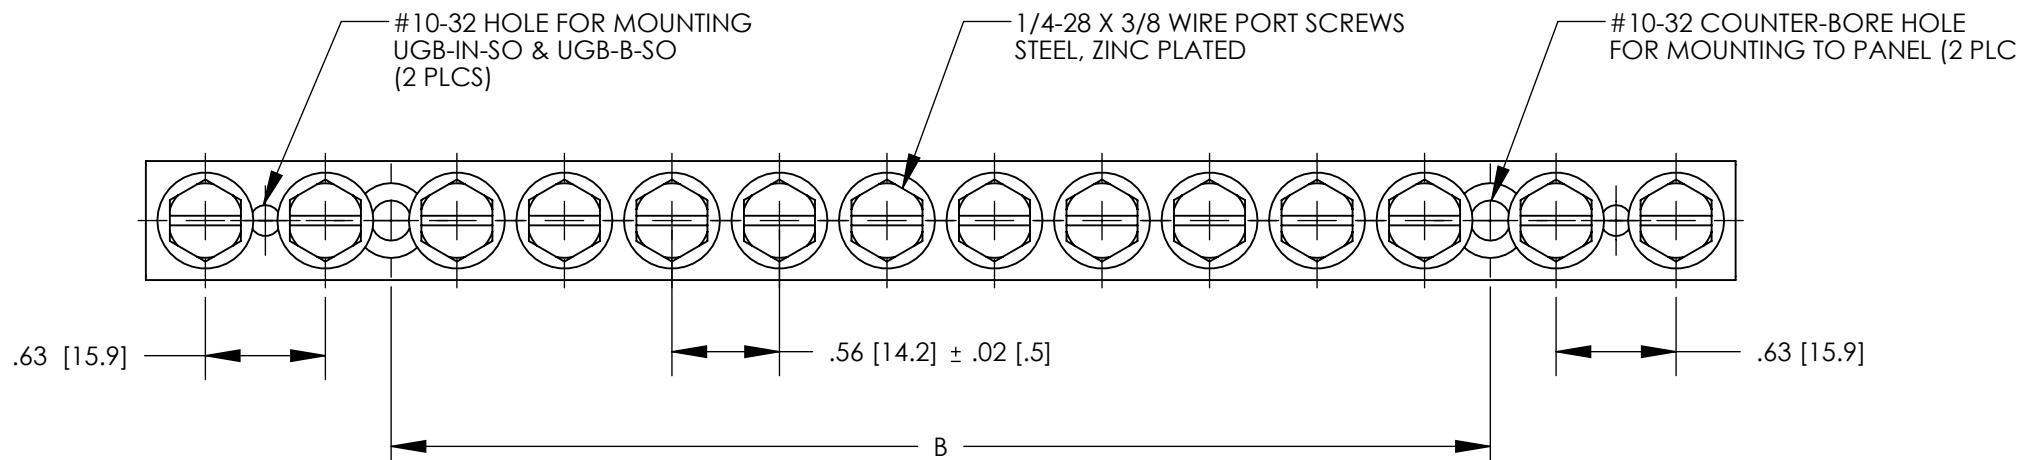


NOTES

1. MATERIAL: CDA-110 ELECTROLYTIC COPPER, TIN PLATED
2. UL LISTED 467 FOR GROUNDING AND BONDING EQUIPMENT
3. CSA CERTIFIED 22.2
4. CAN BE MOUNTED DIRECTLY TO PANEL OR MOUNTED USING UGB-IN-SO, OR USING UGB-B-SO
5. MAXIMUM EQUIPMENT GROUNDING CONDUCTOR OF 2/0 AWG COPPER WIRE
6. ACCEPTS MOST LUGS AND TERMINALS WITH A 1/4" [6.4] STUD HOLE SIZE AND A MAX. TONGUE WIDTH OF .55" [14.0]



#10-32 THREAD-FORMING
MOUNTING SCREWS (QTY. 2)

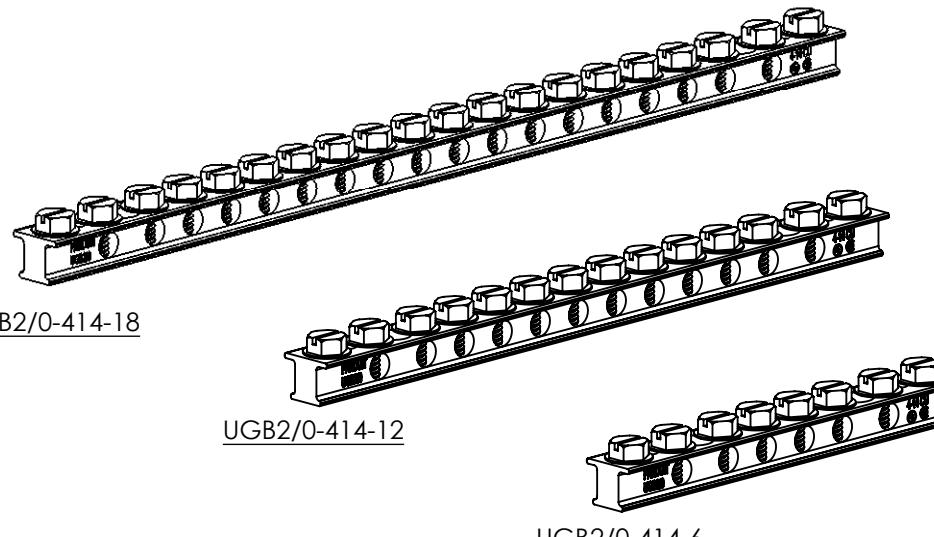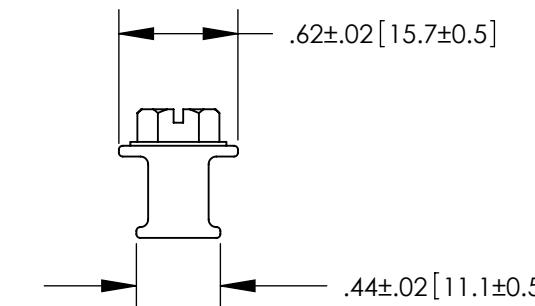

PANDUIT PART NUMBER	# OF PORTS	WIRE PORT WIRE RANGE	1/4-28 WIRE PORT SCREW QTY.	DIMENSIONS - IN [mm] +/- .02 [.5]	
				A	B
UGB2/0-414-6	6	14 AWG - 4 AWG	8	4.92 [125.0]	2.37 [60.1]
UGB2/0-414-12	12	14 AWG - 4 AWG	14	8.28 [210.3]	5.73 [145.4]
UGB2/0-414-18	18	14 AWG - 4 AWG	20	11.64 [295.7]	9.09 [230.8]



PANDUIT CORP. TINLEY PARK, ILLINOIS

CUSTOMER DRAWING									
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.X) \pm (.XXX) \pm (.XX) \pm ANGLES \pm									
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION									
					DRAWN BY JHNU		MAT'L:		SCALE NONE
00	1/12	JHNU	SRBI	RELEASED TO PRODUCTION	10J017CB-JC	RGB	RGB	DATE 1/12	DRAWING NO / CAD FILE 10J017CB-JC
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP	CHK'D SRBI	DWG B SIZE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[UGB2/0-414-12](#)