

## SPECIFICATIONS





PARAMETERS	VALUES	UNITS
RESONANT FREQUENCY	$1,300 \pm 500$	Hz
RESONANT IMPEDANCE (MAX)	200	Ohm
MAX INPUT VOLTAGE	30	Vp-p
CAPACITANCE @ 1kHz	$150,000 \pm 25\%$	pF
PLATE MATERIAL	BRASS	-
OPERATING TEMPERATURE	$-20 \sim +60$	°C
STORAGE TEMPERATURE	$-20 \sim +70$	°C

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO  
PROJECTS UNLIMITED, INC. ANY USE OR  
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR  
WRITTEN PERMISSION OF PROJECTS UNLIMITED,  
INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

## REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	5/20/2013	

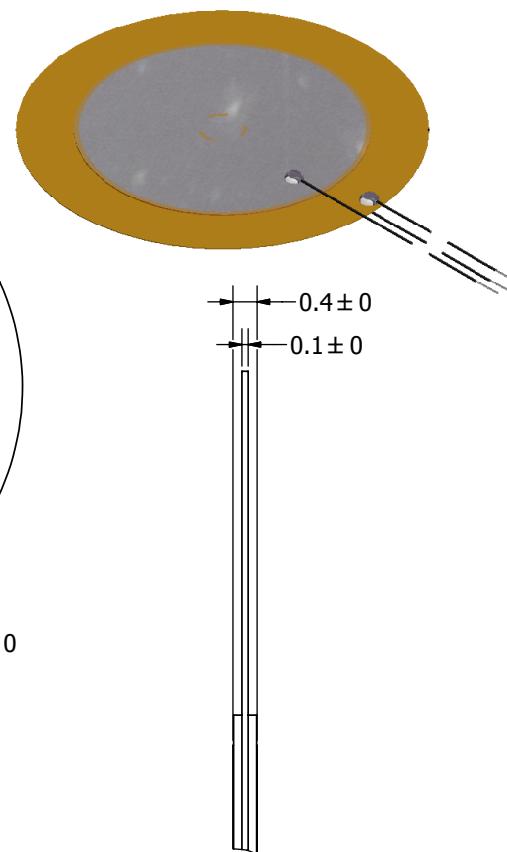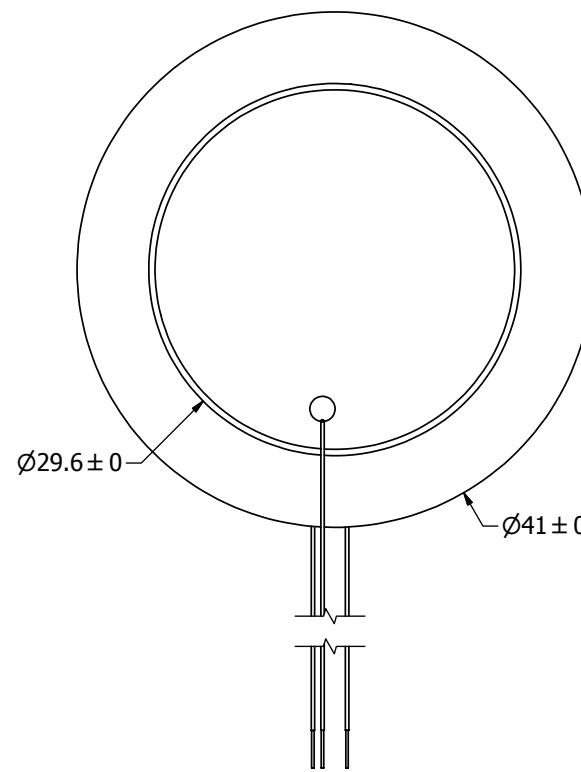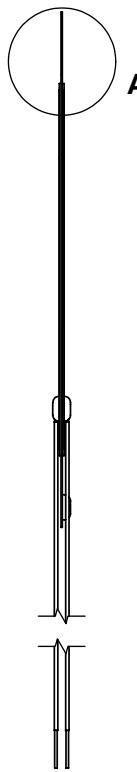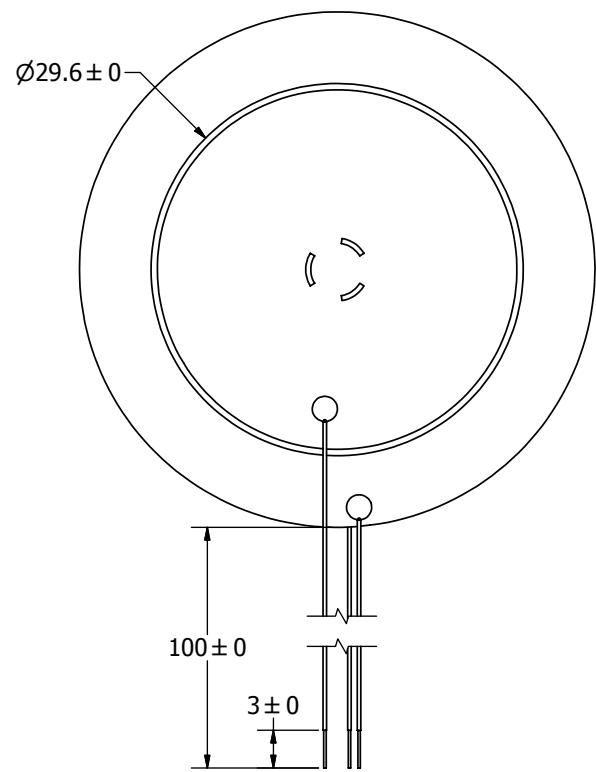

A (12:1)


### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE  
SPECIFIED:  
DIMENSIONS ARE IN  
MILLIMETERS,  
TOLERANCES  
ARE  $\pm 0.5$  AND  
ANGLES ARE  $\pm 3^\circ$ .  
AB4113B-LW100-R.idw

SIZE  
A3

Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
J.D.	5/20/2013	C.W.	5/21/2013	B.R.	5/21/2013	5/20/2013

 a projects unlimited company

AB4113B-LW100-R

Bender

Edition  
-  
Sheet  
1 / 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[AB4113B-LW100-R](#)