


REV	ECO	
A3	-	



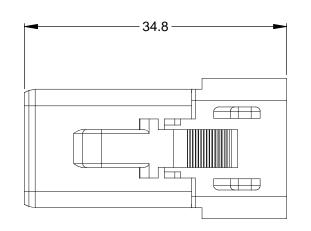

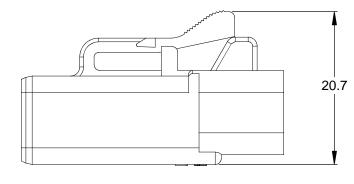

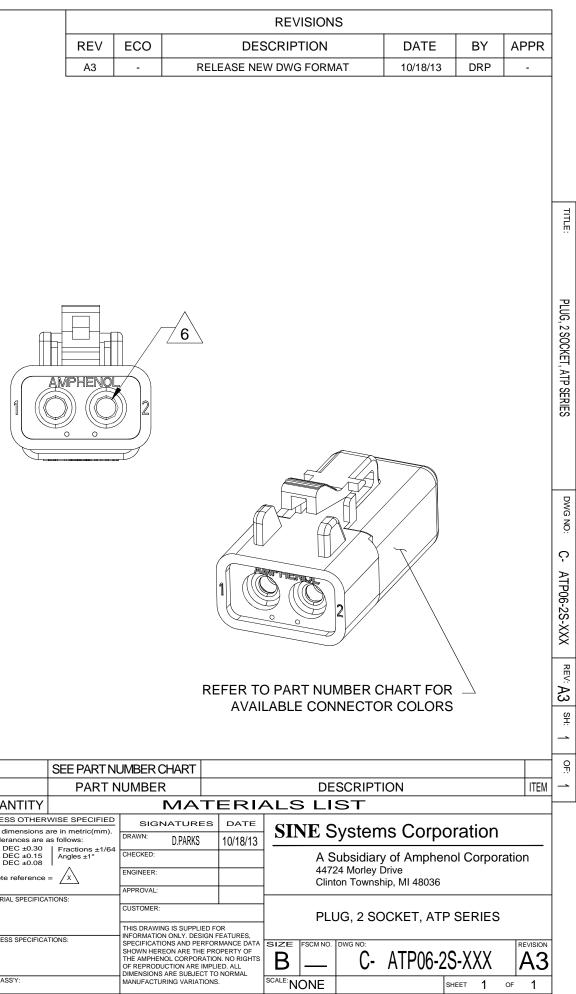

NOTES: UNLESS OTHERWISE SPECIFIED


- 1. MATERIAL: HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER
- 2. MODIFICATIONS: N/A

## 3. SPECIFICATIONS:

- 3.1 CURRENT RATING: 25 AMPS
- 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
- 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC. 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C. 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
- 3.6 MATING CYCLE DURABILITY: 100 CYCLES 3.7 RoHS COMPLIANT
- 4. MATING PART: ATP04-2P\* RECEPTACLE. (\* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

## 6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
12	3.40 mm (.134 in)	4.95 mm (.195 in)	

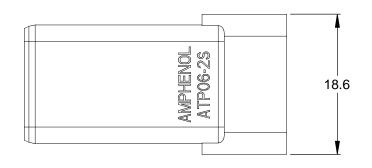

PART NI	PART NUMBER CHART		
COLOR	PART NUMBER		
GREY	ATP06-2S		
BLACK	ATP06-2S-BLK		

STANDARD MOLDED COLOR IS GREY. ADDITIONAL COLOR ( BLACK ) IS AVAILABLE VIA SPECIAL ORDER.

	SEE PART NU	JMBER CHA
	PART NUMBER	
QUANTITY		Μ
UNLESS OTHER	WISE SPECIFIED	SIGNAT
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 L Fractions ±1/64		drawn: D.P
2 PL DEC ±0.30 3 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:
3) Note reference = X MATERIAL SPECIFICATIONS:		ENGINEER:
		APPROVAL:
		CUSTOMER:
		THIS DRAWING IS S
PROCESS SPECIFICATIONS:		INFORMATION ONL SPECIFICATIONS A SHOWN HEREON A THE AMPHENOL CC OF REPRODUCTION DIMENSIONS ARE S
NEXT ASS'Y:		MANUFACTURING

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: ATP06-2S-BLK