

SPECIFICATIONS			
PARAMETERS	VALUES	UNIT	
DIRECTIVITY	OMINI	-	
SENSITIVTY	-44 ± 3	dB	
STANDARD OPERATING VOLTAGE	2	Vdc	
MAX OPERATING VOLTAGE	10	Vdc	
CURRENT CONSUMPTION (MAX)	0.5	mA	
IMPEDANCE	2.2	KOhm	
SIGNAL TO NOISE RATIO (MIN.)	60	dB	
TERMINAL	PIN	-	
INTERNAL CAPACITOR	N/A	pF	

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. 15 PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	1/25/2006		
Α	ADDED TERMINAL POLARITY	2/5/2007	D.F.	
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/26/2010	B.R.	

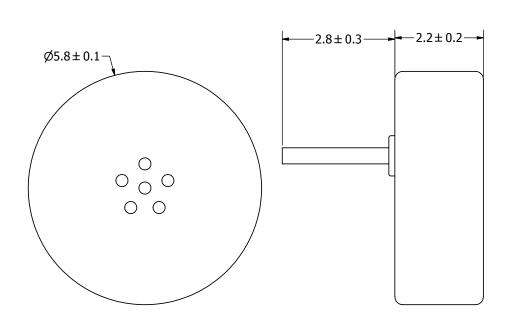

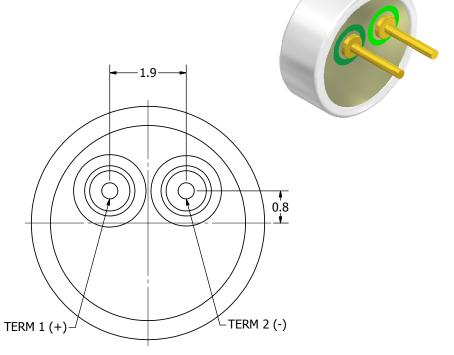

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

	UNLESS OTHERWISE SPECIFIED:	CLZE
	DIMENSIONS ARE IN MILLIMETERS,	SIZE
	TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3
	POM-2244P-NE-P idw	

J.A.F.	1/25/2006	E	.Р.
	pul.		
	a projects unlimited co) Inc ompany	

Checked by

	1/25/2006	B.R.	1/25/20)06 10	/26/2010
ROM-2244P-NF-R					
		_		Edition	Sheet

Date

Drawn Date

Approved by

Microphone Edition Sheet 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio:

ROM-2244P-NF-R