
SPECIFICATIONS					
PARAMETERS	VALUES	UNITS			
RATED VOLTAGE	12	Vdc			
OPERATING VOLTAGE RANGE	8 ~ 18	Vdc			
RATED CURRENT (MAX)	10	mA			
MINIMUM SPL @ 10 CM	95	dBA			
RESONANT FREQUENCY	2,900 ± 500	Hz			
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec			
OPERATING TEMPERATURE	-30 ~ +85	°C			
STORAGE TEMPERATURE	-40 ~ +95	°C			
HOUSING MATERIAL	ABS	-			
TERMINAL MATERIAL	Au PLATED				
	PHOSPHER BRONZE	,			
WEIGHT	5	grams			

THIS DOCUMENT CONTAINS DATA
PROPRIETARY TO PROJECTS UNLIMITED,
INC. ANY USE OR REPRODUCTION, IN ANY
FORM, WITHOUT PRIOR WRITTEN
PERMISSION OF PROJECTS UNLIMITED, INC.
IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	9/12/2005		
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	1/28/2008	B.R.	



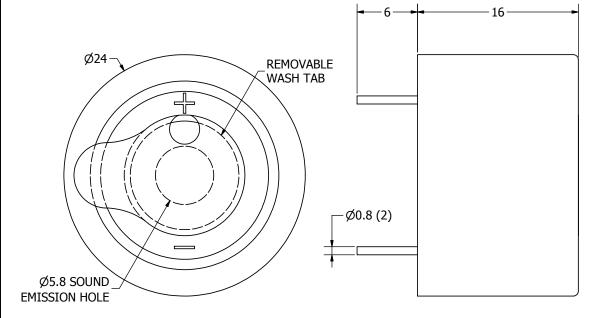

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by
U = U = U	SIZE	J.A.F.
DIMENSIONS ARE IN MILLIMETERS,		\sim
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3	TO S
AI-2429-TW	T-2-R.idw	400

J.A.F.	9/12/2005	Е	.Р.
	ווומ		
4.	audic	TM	
	a projects unlimited co	IIIC	

Date

Checked by

Date

9/12/2005 B.R. 9/12/2005 1/28/2008 AI-2429-TWT-2-R

Date

Drawn Date

Approved by

Indicator Edition Sheet

4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: AI-2429-TWT-2-R