

Features

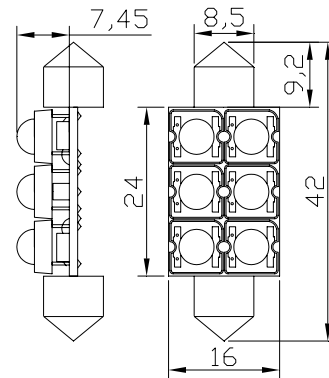
Festoon Light
 Energy Saving and Long Life
 No radiation
 Available Voltage:12VDC/24VDC
 White,Blue,Red,Green,Yellow and so on

Applications

Automotive Top Light
 Automotive License Plate Light
 Automotive Reading Light

Outline Size

Unit: mm

 Tolerance: $\pm 0.30\text{mm}$


Absolute Maximum Rating

(Ta=25 °C)

Item	Symbol	Value	Unit
Input Voltage (DC)	V _i	16	V
Input Current(DC)	I _i	140	mA
Power Dissipation	P _a	2.24	W
Operating Temperature	T _{ope}	-10 ~ +40	
Storage Temperature	T _{stg}	-20~ +80	

Picture



Electrical -Optical Characteristics

(Ta=25 °C)

Item	Symbol	Min.	Typ.	Test Data	Unit
Input Voltage(DC)	V _i	-	12	14	V
Input Current(DC)	I _i	-	70	108	mA
Power Dissipation	P _a	-	0.84	1.512	W
Chromaticity	x		0.27		
Coordinates	y		0.28		
Whole Luminous Flux*	v		42		lm
Beam Pattern	BP	-	120	-	Deg
Net Weight	Wei	-	4.2	-	g

 *Tolerance of luminous intensity is $\pm 15\%$