


- Material:**
- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL:)\*1P+ 28AWG(7/0.12TC)\*2C]+AEB(48B TC)
    - Jacket: Black
    - OD: 3.5MM
  - P1 Connector: Micro USB 5P B/M Solder Type
    - Shell: Nickel
    - Pin: G/F
    - Insulator Color: Black
  - P2 Connector: Micro USB 5P A/M Solder Type
    - Shell: Nickel
    - Pin: G/F
    - Insulator Color: Black
  - Outer Jacket: Black PVC-40P

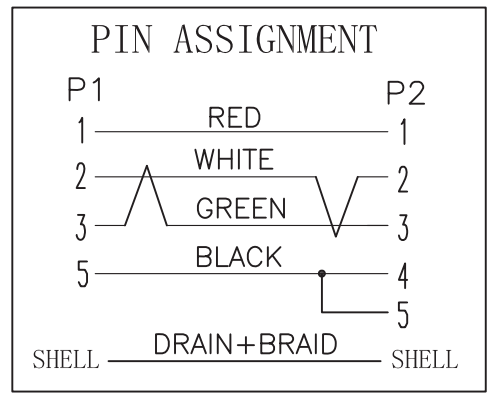

- Electrical:**
- 100% short, open, miswire test
  - Conduct resistance: 2Ω Max.
  - Insulation resistance: 10MΩ Min.
  - Dielectric test: 300V DC

G	Scale	Free					Date	Name	Title USB 2.0 Micro Connection cable A type Male ↔ B type Male, 2 Meters ASSMANN WSW-No. AK67501-2-R
	TOLERANCE						Drawn	19.10.13	
H	Unit: mm	X.	±0.3				Approved		Drawing-No.
		X.X	±X						
		X.XX	±X						Sheet 1/1
		DIM	TOL						
		X.°	±X°	①	Updated information	16.09.13	Wilson		
	X.X°	±X°	①	Modification	Date	Name			
	Angle	TOL	Id.						