RJ45, Single Port, Tap Up, SMD, 100 Base-T

ARJE-0034

RoHS/RoHS II Compliant



16.10 x 13.87 x 25.68mm

FEATURES:

- Compliant with IEEE802.3 standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- High reliability 750 mating/unmating cycles

> APPLICATIONS:


- Supports 10/100 Base-T applications such as Set Top Box and Network Interface Card.
- Provides signal conditioning, EMI suppression and signal isolation

STANDARD SPECIFICATIONS

Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C

Parameters	Minimum	Typical	Maximum	Units	Notes
Turn Ratio (±3%)	1CT:1CT				
Inductance	350			uН	100kHz, 0.1Vrms, 8mADC
Insertion Loss			-1.0	dB	0.1-100MHz
Return Loss	-16.0				1-30MHz
	-13.5			dB	30-60MHz
	-12.0				60-80MHz
Crosstalk	-30.0			dB	0.1-100MHz
CMRR	-30.0			dB	0.1-100MHz
Hipot	1500Vrms				Pri to Sec

MECHANICAL DIMENSIONS

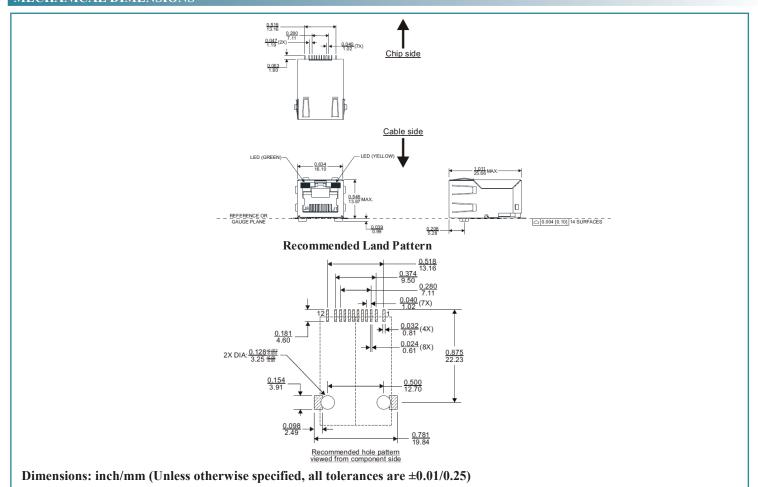

ABRACON IS ISO 9001:2008 CERTIFIED




RJ45, Single Port, Tap Up, SMD, 100 Base-T

ARJE-0034


RoHS/RoHS II Compliant



SCHEMATICS

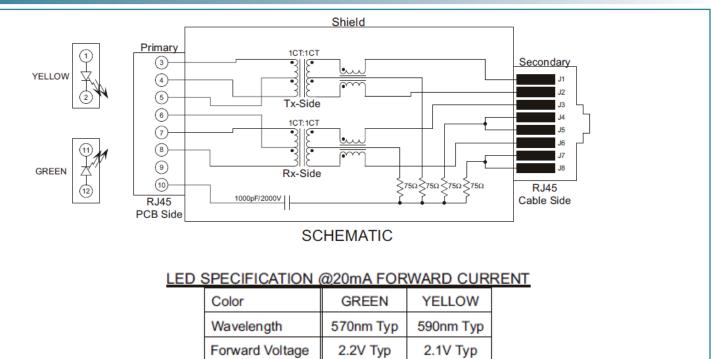

REFLOW PROFILE

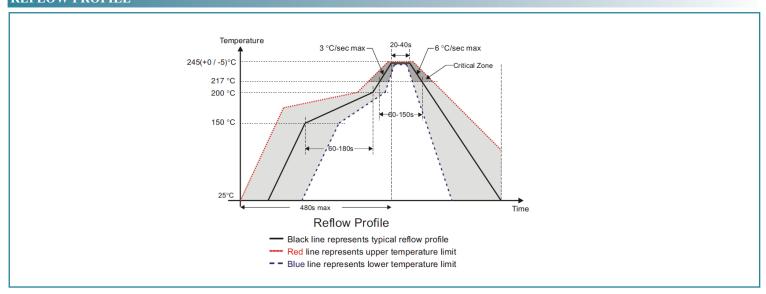




RJ45, Single Port, Tap Up, SMD, 100 Base-T

ARJE-0034

RoHS/RoHS II Compliant



TAPE & REEL:

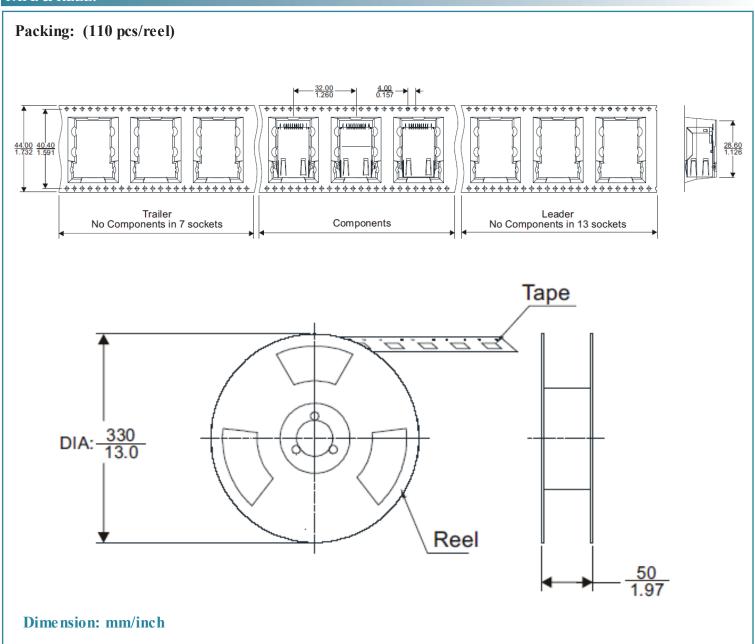

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:
ARJE-0034