

LTCC

High Temperature Inductors

0.40x0.40 inch size



NASCENTTechnology, Inc. has developed a series of high temperature, RoHS compliant inductors using low temperature co-fired ceramic (LTCC) ferrite usable to 300°C that feature low profile, rugged packaging, and self shielding characteristics.



Electrical Parameters at 25 °C unless otherwise noted

Part No.	No Load Inductance [†] μH	100 mA Inductance μH	100 mA Tolerance	Nominal DC Resistance ohms	Rated Current ^{††} mA	Saturation Current* mA
85043	7.2	6.4	20%	0.10	1050	350
85062	10	9.9	20%	0.12	-	350
85044	13	12	20%	0.20	1000	300
85047	20	20	20%	0.19	900	300
85050	27	24	20%	0.70	600	350
85048	49	30	20%	0.56	-	225
85063	48	45	20%	0.53	-	275
85053	48	42	30%	1.33	400	300
85052	54	50	30%	0.95	530	300
85064	90	75	20%	0.99	-	275
85055	100	85	20%	1.75	360	250
85056	115	110	20%	1.00	430	300
85058	210	170	20%	2.00	330	300

[†] Tolerance for no load inductance is ±25 %

^{††} Current will cause a 35 °C temperature rise over ambient (measured 20 to 55 °C)

* Saturation Current is the current that results in a 35% decrease in inductance over the 100 mA Inductance.

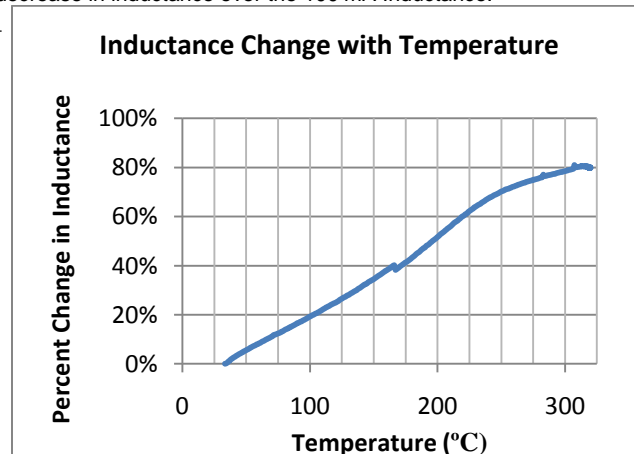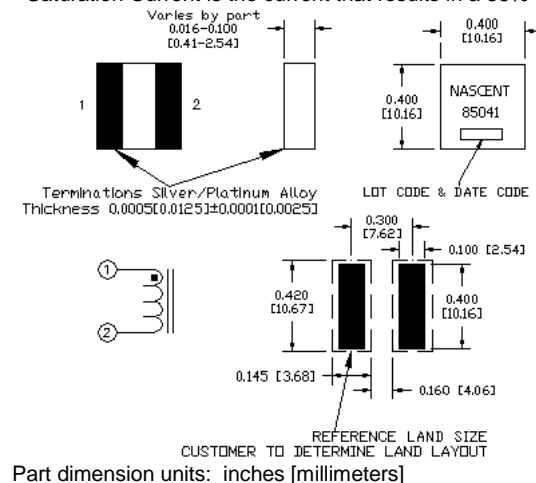

For additional information, contact: Brian Nelson, National Sales Manager
 Phone: 605-878-2417, Fax: 605-884-2450, E-mail: bnelson@nascenttechnology.com
 NASCENTTechnology, Inc. 121 Airport Drive, Watertown, SD 57201
www.nascenttechnology.com