



**LACC**

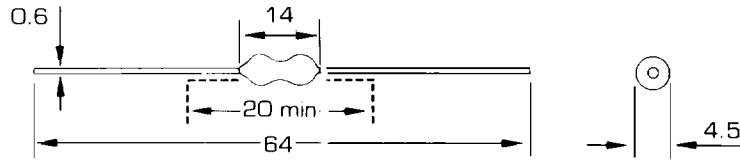

**SPECIFICATIONS & STANDARD VALUES**

Ordering Code	Inductance L ( $\mu$ H) at 20 KHz	Tol. %	Q		SRF (MHz) min.	Dc-Res ( $\Omega$ ) max.	Rated DC Current (mA)
			min.	Freq. (MHz)			
LACC-1R0K - **	1.0	$\pm 10$	60	25.2	175	0.09	2000
LACC-1R2K - **	1.2			157	0.10	1950	
LACC-1R5K - **	1.5			144	0.11	1900	
LACC-1R8K - **	1.8			135	0.12	1850	
LACC-2R2K - **	2.2			121	0.15	1700	
LACC-2R7K - **	2.7			113	0.15	1650	
LACC-3R3K - **	3.3			103	0.23	1100	
LACC-3R9K - **	3.9			96	0.30	1050	
LACC-4R7K - **	4.7			89	0.33	1000	
LACC-5R6K - **	5.6			85	0.37	900	
LACC-6R8K - **	6.8		72	0.45	875		
LACC-8R2K - **	8.2		66	0.63	840		
LACC-100K - **	10.0		57	0.73	800		
LACC-120K - **	12.0		51	1.35	650		
LACC-150K - **	15.0		47	1.50	610		
LACC-180K - **	18.0		44	1.65	565		
LACC-220K - **	22.0		41	1.86	510		
LACC-270K - **	27.0		38	2.10	490		
LACC-330K - **	33.0		36	2.40	450		
LACC-390K - **	39.0		33	2.70	430		
LACC-470K - **	47.0	31	3.00	390			
LACC-560K - **	56.0	29	3.40	360			

**HCCC**

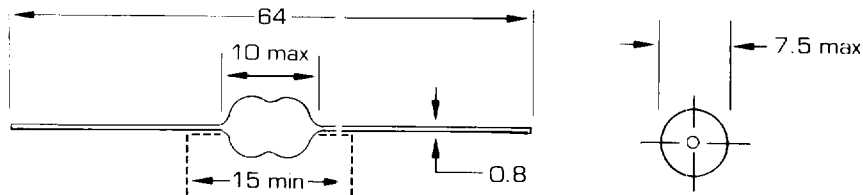

Ordering Code	Inductance L ( $\mu$ H)	Tol. %	Rated Current (A)	Resistance ( $m\Omega$ )	Test Freq. (MHz)
HCCC-R70M - **	0.7	$\pm 20$	7	15	1
HCCC-1R0M - **	1.0		4.0		
HCCC-1R8M - **	1.8		2.5	55	
HCCC-3R6M - **	3.6		1.8	110	
HCCC-8R2M - **	8.2		1.5	130	
HCCC-100M - **	10.0		1.3	240	