




VK Miniature Sized series

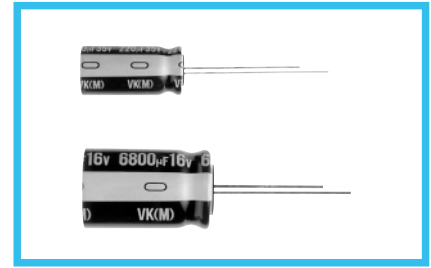


- One rank smaller case sizes than VR series.
- Compliant to the RoHS directive (2011/65/EU).

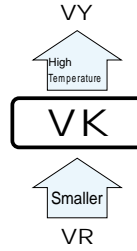

Specifications

Item	Performance Characteristics																																	
Category Temperature Range	-40 to +85°C (6.3V to 400V), -25°C to +85°C (450V)																																	
Rated Voltage Range	6.3 to 450V																																	
Rated Capacitance Range	0.1 to 68000μF																																	
Capacitance Tolerance	±20% at 120Hz, 20°C																																	
Leakage Current	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3 to 100V</th> <th>160 to 450V</th> </tr> </thead> <tbody> <tr> <td>After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.</td> <td>After 1 minute's application of rated voltage, CV ≤ 1000 : I = 0.1CV+40μA or less</td> <td>After 1 minute's application of rated voltage, CV > 1000 : I = 0.04CV+100 (μA) or less</td> </tr> <tr> <td>After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.</td> <td></td> <td></td> </tr> </tbody> </table>	Rated voltage (V)	6.3 to 100V	160 to 450V	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.	After 1 minute's application of rated voltage, CV ≤ 1000 : I = 0.1CV+40μA or less	After 1 minute's application of rated voltage, CV > 1000 : I = 0.04CV+100 (μA) or less	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																										
	Rated voltage (V)	6.3 to 100V	160 to 450V																															
After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.	After 1 minute's application of rated voltage, CV ≤ 1000 : I = 0.1CV+40μA or less	After 1 minute's application of rated voltage, CV > 1000 : I = 0.04CV+100 (μA) or less																																
After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																																		
Tangent of loss angle (tan δ)	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. Measurement frequency : 120Hz at 20°C <table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160 to 250</th> <th>350 to 450</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.25</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	350 to 450	tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25											
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	350 to 450																								
tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25																								
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50 to 100</th> <th>160 to 200</th> <th>250 to 350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>4</td> <td>6</td> <td>15</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z-40°C / Z+20°C</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>—</td> </tr> </tbody> </table>	Rated voltage (V)	6.3	10	16	25	35	50 to 100	160 to 200	250 to 350	400	450	Impedance ratio Z-25°C / Z+20°C	5	4	3	2	2	2	3	4	6	15	ZT / Z20 (MAX.) Z-40°C / Z+20°C	12	10	8	5	4	3	4	8	10	—
	Rated voltage (V)	6.3	10	16	25	35	50 to 100	160 to 200	250 to 350	400	450																							
Impedance ratio Z-25°C / Z+20°C	5	4	3	2	2	2	3	4	6	15																								
ZT / Z20 (MAX.) Z-40°C / Z+20°C	12	10	8	5	4	3	4	8	10	—																								
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C. <table border="1"> <tbody> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>	Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																											
Capacitance change	Within ±20% of the initial capacitance value																																	
tan δ	200% or less than the initial specified value																																	
Leakage current	Less than or equal to the initial specified value																																	
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																	
Marking	Printed with white color letter on black sleeve.																																	

Radial Lead Type

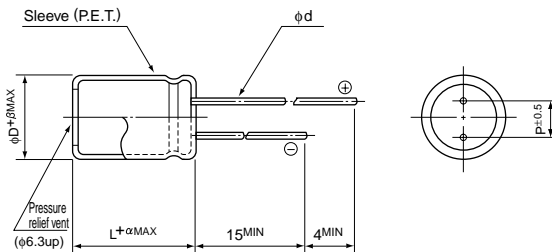


	5	6.3	8	10	12.5	16	18	20	22	25
φD (mm)	5	6.3	8	10	12.5	16	18	20	22	25
P (mm)	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
φd (mm)	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0
β (mm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0

α	(L < 20)	1.5
	(L ≥ 20)	2.0

- Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 10V 330μF)

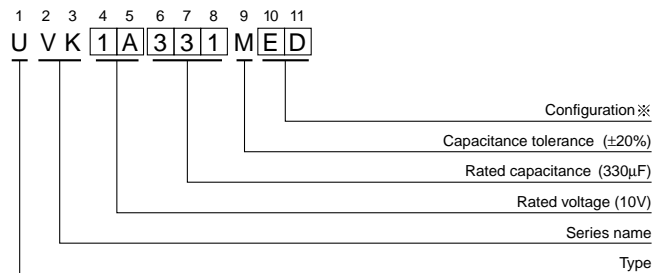

※ Configuration	
φ D	Pb-free leadwire Pb-free PET sleeve
5	DD
6.3	ED
8 · 10	PD
12.5 to 18	HD
20 to 25	RD

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

ALUMINUM ELECTROLYTIC CAPACITORS



■Dimensions

Cap.(μF)	Code	V		6.3		10		16		25		35		50		63	
		0J	1A	1C	1E	1V	1H	1J									
0.1	0R1														5 × 11	1.3	
0.22	R22														5 × 11	2.9	
0.33	R33														5 × 11	4.3	
0.47	R47														5 × 11	6.2	
1	010														5 × 11	17	
2.2	2R2														5 × 11	28	
3.3	3R3														5 × 11	35	
4.7	4R7														5 × 11	40	
10	100														5 × 11	60	
22	220														5 × 11	95	5 × 11 100
33	330														5 × 11	125	6.3 × 11 140
47	470												5 × 11 130		6.3 × 11 155	6.3 × 11 170	
68	680											6.3 × 11 160		6.3 × 11 210	8 × 11.5 220		
100	101								5 × 11 180			6.3 × 11 210		8 × 11.5 260	8 × 11.5 280		
220	221				5 × 11 220		6.3 × 11 260		6.3 × 11 280			8 × 11.5 350		10 × 12.5 430	10 × 16 490		
330	331				6.3 × 11 290		6.3 × 11 320		8 × 11.5 390			10 × 12.5 490		10 × 16 590	10 × 20 710		
470	471				6.3 × 11 350		8 × 11.5 440		10 × 12.5 550			10 × 16 650		10 × 20 760	12.5 × 20 900		
1000	102	8 × 11.5 540			10 × 12.5 650		10 × 12.5 700		10 × 16 860			12.5 × 20 1150		12.5 × 25 1350	16 × 25 1300		
2200	222	10 × 16 890			10 × 16 990		10 × 20 1000		12.5 × 25 1550			16 × 25 1800		16 × 31.5 1980	18 × 35.5 2300		
3300	332	10 × 20 1190			12.5 × 20 1450		12.5 × 25 1700		16 × 25 1980			16 × 31.5 2100		18 × 35.5 2500	20 × 40 2700		
4700	472	12.5 × 20 1550			12.5 × 25 1800		16 × 25 2100		16 × 25 2200			16 × 35.5 2500		20 × 40 2900	22 × 50 3400		
6800	682	12.5 × 25 1920			16 × 25 2250		16 × 25 2250		16 × 35.5 2600			18 × 40 2800		22 × 50 3500	25 × 50 3900		
10000	103	16 × 25 2350			16 × 31.5 2550		16 × 35.5 2710		18 × 40 2800			22 × 50 3700		25 × 50 4000			
15000	153	16 × 31.5 2550			16 × 35.5 2880		18 × 40 3100		22 × 50 3800			25 × 50 4300					
22000	223	18 × 35.5 3200			18 × 40 3400		22 × 40 3800		25 × 50 4500								
33000	333	20 × 40 3500			22 × 50 4500		25 × 50 4800										
47000	473	22 × 50 3900			25 × 50 5000												
68000	683	25 × 50 4300															Case size φD×L (mm) Rated ripple

Cap.(μF)	Code	V		100		160		200		250		350		400		450	
		2A	2C	2D	2E	2V	2G	2W									
0.1	0R1	5 × 11 2.1						6.3 × 11 2.1									
0.22	R22	5 × 11 4.7						6.3 × 11 4.7									
0.33	R33	5 × 11 7						6.3 × 11 7									
0.47	R47	5 × 11 10						6.3 × 11 15						6.3 × 11 12			
1	010	5 × 11 21						6.3 × 11 22						6.3 × 11 20			
2.2	2R2	5 × 11 30						6.3 × 11 33				6.3 × 11 30		8 × 11.5 38	8 × 11.5 28		
3.3	3R3	5 × 11 40						6.3 × 11 40	6.3 × 11 40		8 × 11.5 43		8 × 11.5 48	10 × 12.5 40			
4.7	4R7	5 × 11 45						6.3 × 11 50	6.3 × 11 50		8 × 11.5 55		10 × 12.5 60	10 × 12.5 46			
10	100	5 × 11 70	8 × 11.5 80			8 × 11.5 80		10 × 12.5 100			10 × 12.5 90		10 × 16 90	10 × 20 80			
22	220	6.3 × 11 130	10 × 12.5 130			10 × 16 150		10 × 20 150	12.5 × 20 150		12.5 × 25 240		16 × 25 240	16 × 25 180			
33	330	8 × 11.5 180	10 × 16 180			10 × 20 200		10 × 20 200	12.5 × 25 240		16 × 25 300		16 × 25 280	16 × 31.5 220			
47	470	8 × 11.5 200	10 × 20 210			12.5 × 20 270		12.5 × 20 270	16 × 25 380		16 × 25 400		16 × 31.5 340	18 × 35.5 260			
68	680	10 × 12.5 270	12.5 × 20 350			12.5 × 25 350		16 × 25 380	16 × 25 440		18 × 35.5 520		18 × 35.5 440	18 × 40 280			
100	101	10 × 16 340	12.5 × 25 430			16 × 25 450		16 × 25 440	18 × 35.5 520		22 × 50 760		22 × 50 650	25 × 50 350			
220	221	12.5 × 20 550	16 × 31.5 580			16 × 35.5 700		18 × 35.5 680	22 × 50 1000								
330	331	12.5 × 25 760	18 × 35.5 800			18 × 40 950		20 × 40 1000									
470	471	16 × 25 1000	18 × 40 1200			22 × 40 1300		22 × 50 1400									
1000	102	18 × 35.5 1350	25 × 50 1900														
2200	222	22 × 50 2400															
3300	332	25 × 50 2900															Case size φD×L (mm) Rated ripple

Rated ripple current (mA_{rms}) at 85°C 120Hz

●Frequency coefficient of rated ripple current

V	Cap.(μF)	Frequency				
		50Hz	120Hz	300Hz	1 kHz	10kHz or more
6.3 to 100	0.1 to 68	0.75	1.00	1.35	1.57	2.00
	100 to 470	0.80	1.00	1.23	1.34	1.50
	1000 to 68000	0.85	1.00	1.10	1.13	1.15
160 to 450	0.1 to 220	0.80	1.00	1.25	1.40	1.60
	330 to 1000	0.90	1.00	1.10	1.13	1.15

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UVK0J333MRD](#) [UVK0J472MHD](#) [UVK0J473MRD](#) [UVK0J102MPD](#) [UVK0J103MHD](#) [UVK0J682MHD](#)
[UVK0J683MRD](#) [UVK1A102MPD](#) [UVK1A332MHD](#) [UVK1A333MRD](#) [UVK1A471MED](#) [UVK1C332MHD](#)
[UVK1C333MRD](#) [UVK1E223MRD](#) [UVK1E331MPD](#) [UVK1E332MHD](#) [UVK1H103MRD](#) [UVK1H220MDD](#)
[UVK1H221MPD](#) [UVK0J153MHD](#) [UVK0J222MPD](#) [UVK0J223MHD](#) [UVK0J332MPD](#) [UVK1A222MPD](#) [UVK1A223MHD](#)
[UVK1A331MED](#) [UVK1C222MPD](#) [UVK1C223MRD](#) [UVK1C331MED](#) [UVK1E153MRD](#) [UVK1E221MED](#)
[UVK1E222MHD](#) [UVK1A103MHD](#) [UVK1A153MHD](#) [UVK1A221MDD](#) [UVK1C102MPD](#) [UVK1C102MPT](#)
[UVK1C103MHD](#) [UVK1C153MHD](#) [UVK1C221MED](#) [UVK1E101MDD](#) [UVK1E102MPD](#) [UVK1E103MHD](#)
[UVK1H010MDD](#) [UVK1H0R1MDD](#) [UVK1H100MDD](#) [UVK1A472MHD](#) [UVK1A473MRD](#) [UVK1A682MHD](#)
[UVK1C471MPD](#) [UVK1C472MHD](#) [UVK1C682MHD](#) [UVK1E471MPD](#) [UVK1E472MHD](#) [UVK1E682MHD](#)
[UVK1H222MHD](#) [UVK1H2R2MDD](#) [UVK1H330MDD](#) [UVK1H472MRD](#) [UVK1H4R7MDD](#) [UVK1H680MED](#)
[UVK1J221MPD](#) [UVK1J222MHD](#) [UVK1J330MED](#) [UVK1V103MRD](#) [UVK1V153MRD](#) [UVK1V221MPD](#)
[UVK2A0R1MDD](#) [UVK2A100MDD](#) [UVK1H101MPD](#) [UVK1H102MHD](#) [UVK1H470MED](#) [UVK1H471MPD](#)
[UVK1J101MPD1TA](#) [UVK1J102MHD](#) [UVK1J220MDD](#) [UVK1J682MRD](#) [UVK1V101MED](#) [UVK1V102MHD](#)
[UVK1H331MPD](#) [UVK1H332MHD](#) [UVK1H3R3MDD](#) [UVK1HR33MDD](#) [UVK1HR47MDD](#) [UVK1J101MPD](#)
[UVK1J471MHD](#) [UVK1J472MRD](#) [UVK1J680MPD](#) [UVK1V470MDD](#) [UVK1V471MPD](#) [UVK1V472MHD](#)
[UVK1H682MRD](#) [UVK1HR22MDD](#) [UVK1J331MPD](#) [UVK1J332MRD](#) [UVK1J470MED](#) [UVK1V222MHD](#)
[UVK1V331MPD](#) [UVK1V332MHD](#) [UVK2A101MPD](#)