

BAND SWITCHING PIN DIODE

DESCRIPTION:


The **ASI 5082-3188** is a Switching Diode Designed for low power Applications such as RF duplexers, antenna switching matrices, and time multiplex filters, Optimized for VHF/UHF band switching.

FEATURES INCLUDE:

- Low series resistance
- Low capacitance
- Hermetic Glass Package

MAXIMUM RATINGS

I_F	100 mA
V_R	35 V
P_{DISS}	250 mW @ $T_C = 25\text{ }^\circ\text{C}$
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	0.6 °C /mW

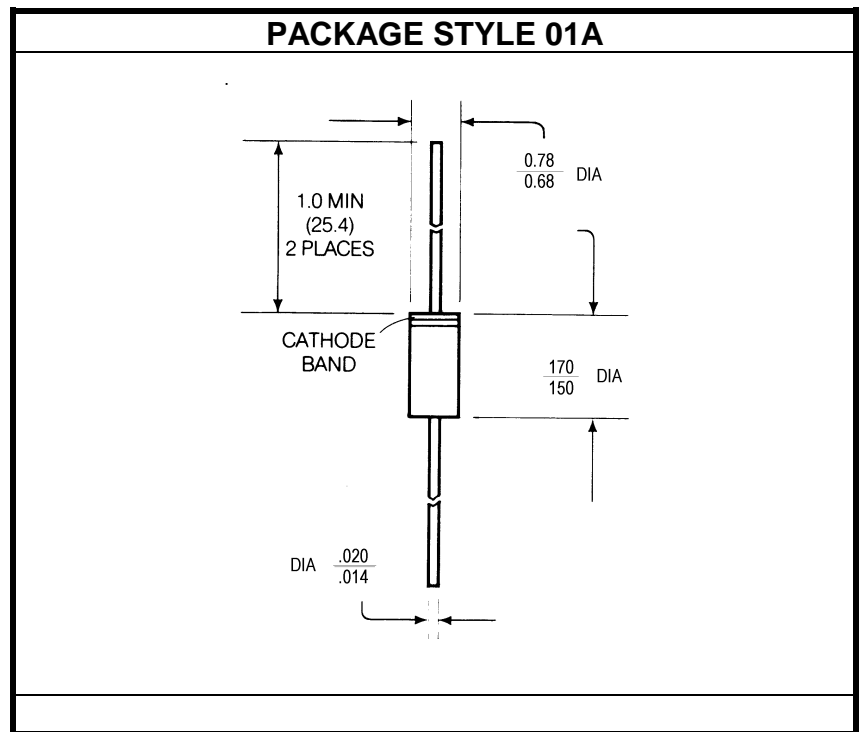

CHARACTERISTICS $T_C = 25\text{ }^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
V_{BR}	$I_R = 10\text{ }\mu\text{A}$	35			V
C_T	$V_R = 20\text{ V}$ $f = 1.0\text{ MHz}$			1.0	pF
R_S	$I_F = 10\text{ mA}$ $f = 100\text{ MHz}$			0.6	Ω
τ	$I_F = 10\text{ mA}$ $I_R = 6.0\text{ mA}$		70		nS
t_{rr}	$V_R = 10\text{ V}$ $I_F = 20\text{ mA}$		12		nS