



REV	DATE	ECD#
A	09/06/90	1140
B	05/26/94	1314

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

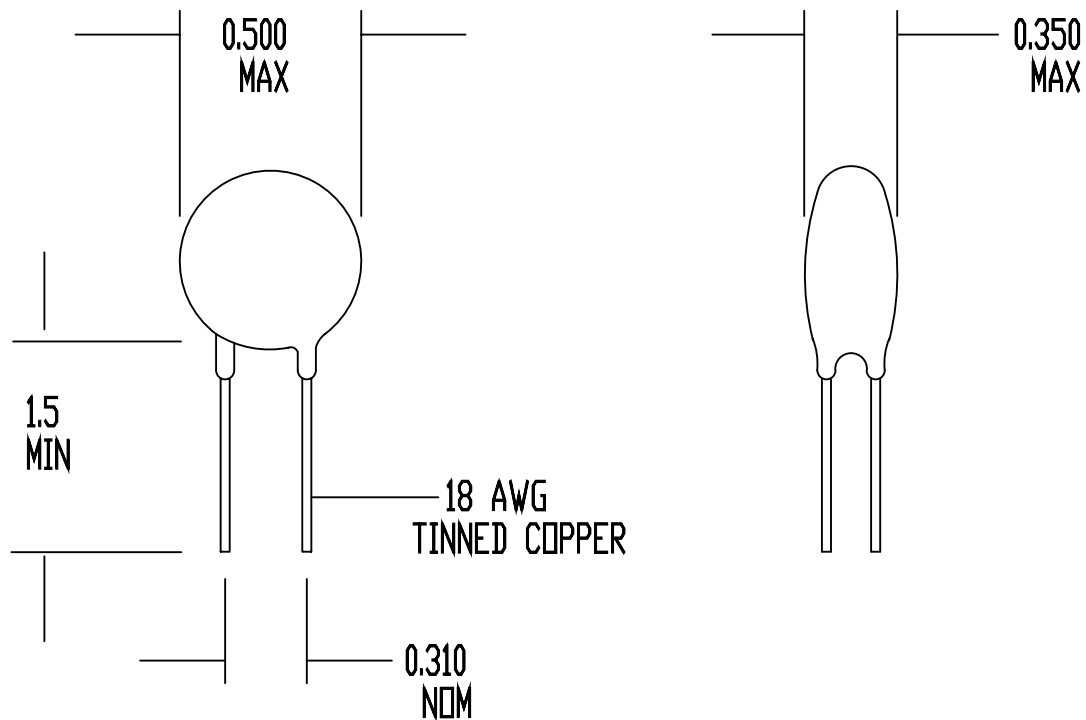

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 10 OHMS +/- 15%
 MAXIMUM CONTINUOUS CURRENT (I_{max}) = 6 AMPS
 RESISTANCE AT I_{max} = 0.15 OHMS NOMINAL
 MAXIMUM VOLTAGE RATING = 265 VAC RMS
 MAXIMUM SURGE RATING = 40 JOULES
 MARKING = OPTIONAL
 ENCAPSULATION = SILICONE RESIN
 LEADS = RODAN P/N STL-209-37

DRAWN BY D. NGUYEN		 AMETHERM <i>Circuit Protection Thermistors</i>
DATE 08/21/80	ORIG. F. TISED	
REV B	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG27

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SG27](#)