
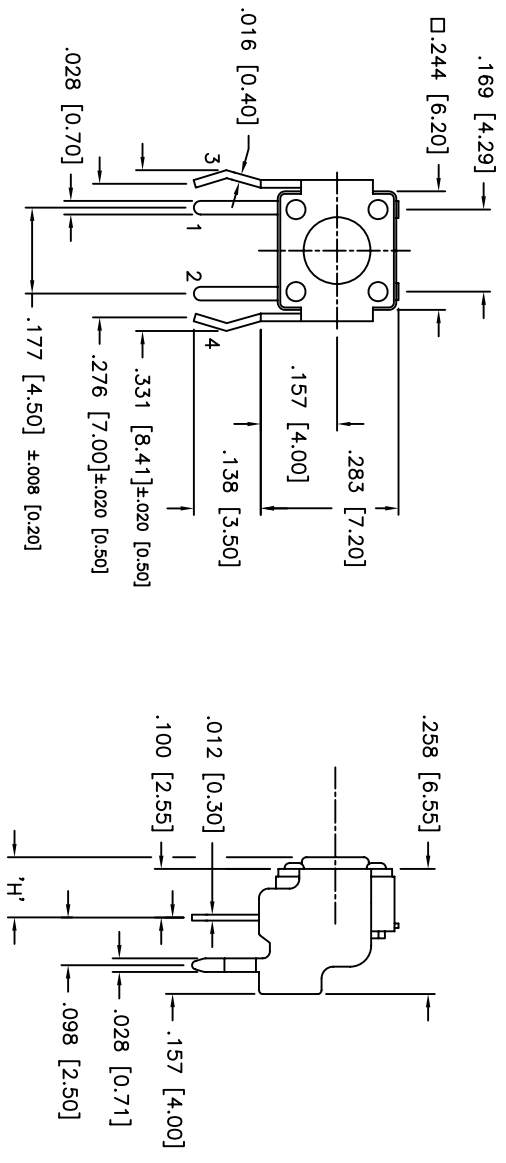



THIS DOCUMENT IS THE PROPERTY OF APM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT THE PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APM COMPONENTS INC.

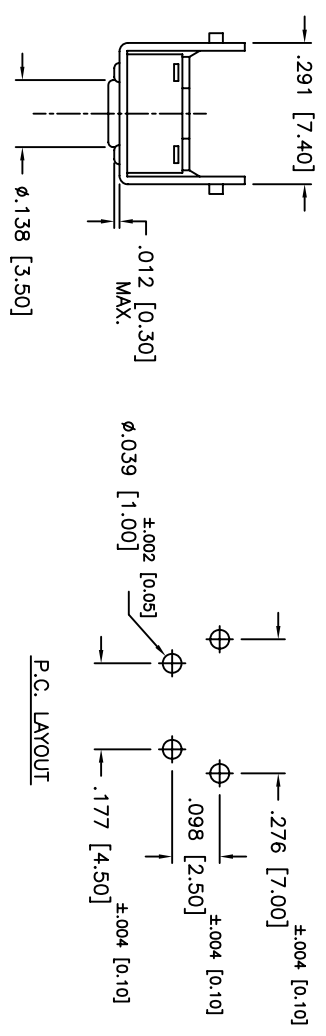

PART NUMBER DESCRIPTION

ADTSA 6**V
 RIGHT ANGLE TACT
 DIM "L":
 6 = 6mm X 6mm
 5 = .467 [11.85]
 4 = .329 [8.35]
 3 = .230 [5.85]
 2 = .152 [3.85]
 1 = .124 [3.15]

COLOR OF STEM FOR OPERATING FORCE:
 K = BLACK, 100gf
 N = BROWN, 160gf
 R = RED, 260gf
 S = SALMON, 320gf
 Y = YELLOW, 520gf



DESCRIPTION: SPDT, RIGHT ANGLE, THRU-HOLE MOUNT, GROUNDING, TACT SWITCH.
 SPECIFICATIONS:
 STORAGE TEMP. RANGE: -30°C TO +80°C
 OPERATING TEMPERATURE RANGE: -25°C TO +70°C
 RATING: 50mA @ 12VDC
 CONTACT RESISTANCE: 100mohm MAX.
 INSULATION RESISTANCE: 100Mohm MIN, 500VDC.
 DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE
 ELECTRICAL LIFE: 100,000 CYCLES FOR 320gf; 260gf
 ELECTRICAL LIFE: 200,000 CYCLES FOR 160gf
 SHOCK RESISTANCE: 50G PER METHOD 213B,
 MIL-STD-202F
 VIBRATION RESISTANCE: PASSES METHOD 201A,
 MIL-STD-202F
 CONTACT ARRANGEMENT: 1 POLE, 1 THROW.

MATERIALS:
 COVER: STAINLESS STEEL
 CONTACT DISC: PHOSPHOR BRONZE WITH SILVER CLADDING
 TERMINAL: .012THK X.028 [0.30 THK X 0.70]
 BRASS WITH SILVER PLATING
 BASE: UL 94V-0 NYLON THERMOPLASTIC COLOR: BLACK
 STEM: UL 94V-0 NYLON THERMOPLASTIC
 ROHS COMPLIANT

SOLDERING:
 WAVE SOLDERING: 260°C MAX. FOR 5 SECONDS MAX.
 HAND SOLDERING: 350°C MAX. FOR 5 SECONDS MAX.
 (30 WATT IRON MAX.)
 LEAD FREE PROCESS COMPATIBLE

DATE	SYM	REVISION RECORD	DWNL	CK
10/05	A	ECO# 480	CD	PD
1/06	B	ECO# 526	CD	PD

<p>9A. INSPECT</p> <p>DESIGNER'S INITIAL</p> <p>TOLERANCES (DIM)</p> <p>XXX±.008(0.20)</p> <p>XXXX±.0008(0.02)</p> <p>ANGLE = 40.5°</p>		<p>APM</p> <p>63 Neck Rd.</p> <p>Horseshoe Bend</p> <p>Flint, MI 48834</p> <p>734-255-5854</p>	<p>REV. PJD</p> <p>DR. JT</p>
<p>INCH</p> <p>1 OF 1</p> <p>SHEET</p> <p>SIZE B</p> <p>SCALE 4:1</p> <p>THIRD ANGLE PROJECTION</p>	<p>TITLE</p> <p>ADTSA6**V</p>	<p>DATE</p> <p>07/07/04</p> <p>DRAWING NO.</p> <p>B7606</p>	<p>REV</p> <p>B</p>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[ADTSA61KV](#) [ADTSA61NV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA62NV](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA63NV](#)
[ADTSA63RV](#) [ADTSA63RV923](#) [ADTSA65KV](#) [ADTSA65NV](#) [ADTSA65RV](#) [ADTSA66KV](#) [ADTSA66NV](#) [ADTSA66RV](#)