

# **Magnetic Transducer (SMT)**


Date: 10/6/08


Dimensions: mm (in.)


# **Part Number:**


254-MB553-RO


**Magnetic Transducer (SMT** 









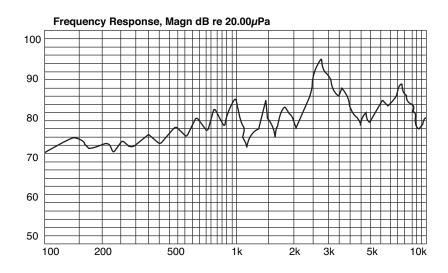

KT-400416

### **Electrical Specifications:**

Rated Voltage: 5.0VDCOperating Voltage: 4-6 VResonant Frequency: 2730Hz

• Sound Pressure Level: 85dB min.

· Average Current Consumption: 80mA max.

Coil Resistance: 30±5Ω

## **Mechancial Specifications:**

Operating Temperature: -30°C ~ +70°C
Storage Temperature: -40°C ~ +85°C

### Materials:

Housing: LCPWeight: 1g

#### Note:

· RoHS compliant by exemption

**Available from Mouser Electronics** 

www.mouser.com

(800) 346-6873

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kobitone:

254-MB553-RO