


Silicon Chip Resistors

Silicon Chip Resistors are offered only conjunctively to purchase order of further IXYS chips

| Part Type | Resistance ① Ω | Chip mm | Dimension mils | Chips per Wafer | Wafer Diameter mm | R _{th} ② K/W | Notes |
|-------------------|-------------------|----------------|-------------------|--------------------|-------------------------|--------------------------|-------|
| IXWW 13-AL | 1 | 2.0x2.88x0.43 | 79x113x17 | 1184 | 100 | 2.5 | 3 |
| IXWW 14-AL | 1 | 2.4x2.4x0.43 | 94x94x17 | 1184 | 100 | 2.5 | 3 |
| IXWW 11-AL | 3 | 1.4x1.4x0.43 | 55x55x17 | 3400 | 100 | 7.4 | 3 |
| IXWW 22-AL | 2x2 | 2.0x4.8x0.44 | 79x189x17 | 752 | 100 | 2x3.0 | 4 |
| IXWW 25-AL | 2x2.5 | 2.0x4.0x0.44 | 79x189x17 | 908 | 100 | 2x3.6 | 4 |
| IXWW 27-AL | 3 | 1.91x1.91x0.44 | 75x75x17 | 2034 | 100 | 4 | 3 |
| IXWW 34-AG | 5 | 2.4x2.4x0.48 | 94x94x17 | 1184 | 100 | 2.5 | 3 |
| IXWW 34-AL | 5 | 2.4x2.4x0.48 | 94x94x17 | 1184 | 100 | 2.5 | 3 |
| IXWW 44-AG | 10 | 2.4x2.4x0.50 | 94x94x20 | 1184 | 100 | 2.5 | 3 |
| IXWW 44-AL | 10 | 2.4x2.4x0.50 | 94x94x20 | 1184 | 100 | 2.5 | 3 |


- Notes:
1. 25 °C values; resistance tolerance $\pm 30\%$; resistor temperature coefficient 1.02 %/ °C.
 2. Chip resistor thermal resistance when soft-soldered in TO-247 case;
 3. One resistor per chip;
 4. Two resistors with one common connection per chip.
 5. Max. operating chip temperature is 175 °C; Use this value when calculating chip maximum power dissipation
 6. High precision chip resistors, lateral version, 2 and 4 OHM, 2.3 x 2.3 mm, on request

Die Outline

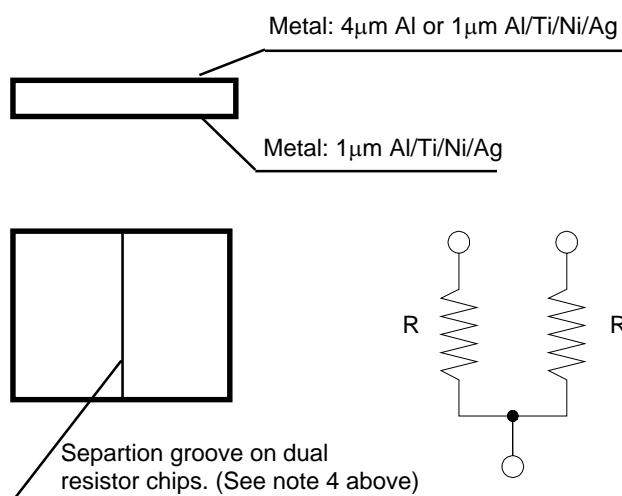

Nomenclature

T - unsawed wafers
W - sawed wafer on foil

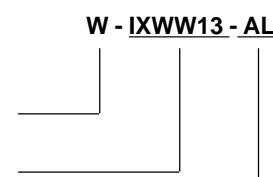

Part type

AL: top side 4 µm Al
bottom side 1 µm Al/Ti/Ni/Ag
AG: both sides 1 µm Al/Ti/Ni/Ag