


# ASDMS-MLC Series

mSATA SATA 6 Gb/s SSD with MLC NAND Flash

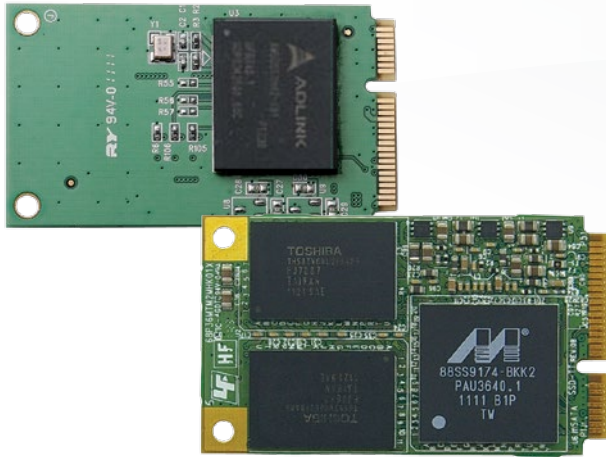

## Features

- Sustained read up to 480 MB/s
- Sustained write up to 390 MB/s
- Capacity: 32, 64, 128, 256GB
- SATA 6 Gb/s interface
- Toshiba 19/ 24nm MLC Toggle NAND flash
- Shock and vibration resistant
- High IOPS

## Specifications

### Physical

Capacity	32, 64, 128, 256GB
Flash Components	Multi-Level Cell (MLC) NAND
Interface	SATA 6Gb/s
Form Factor	mSATA (MO-300) form factor
Dimensions	50.8 (L) x 29.8 (W) x 3.40 mm (H)
Weight	10 g ( Max.)

### Performance

Bandwidth	32 GB: Sustained read/write up to 300/70 MB/s
	64 GB: Sustained read/write up to 440/150 MB/s
	128 GB: Sustained read/write up to 480/300 MB/s
	256 GB: Sustained read/write up to 480/390 MB/s
Read and Write IOPS	32 GB: Random 4KB read/write up to 40,000/19,000 IOPS
	64 GB: Random 4KB read/write up to 61,000/34,000 IOPS
	128 GB: Random 4KB read/write up to 65,000/61,000 IOPS
	256 GB: Random 4KB read/write up to 46,000/26,000 IOPS
Power on to ready	<1.0 sec

### Environmental

Operating Temperature	Commercial: 0°C to +70°C
Storage Temperature	-40°C to +85°C
Shock	1,500G/0.5msec
Vibration	Operation: 7~800Hz, 2.17G (RMS)
	Non-operation: 7~800Hz, 3.08G (RMS)
Certifications	UL, CE, RoHS, Microsoft WHQL

### Compatibility

SATA	SATA Revision 3.0 compliant: compatible with SATA 1.5 Gb/s, 3 Gb/s & 6 Gb/s interface
	ATA/ATAPI- 8 compliant
	SSD enhanced SMART ATA feature set
	Native Command Queuing (NCQ) command set
	TRIM supported

### Power Requirements

Management	3.3V mSATA
	SATA interface power management
	OS-aware hot plug/removal


### Reliability

MTBF	1,500,000 hours
Life Cycle	Minimum of 3 years of useful life

## Ordering Information

Model Number	Description/Configuration
<b>ASDMS-MLC32G-C2</b>	mSATA SATA 6 Gb/s SSD 32 GB, MLC type, ( 0°C~+70°C)
<b>ASDMS-MLC64G-CT</b>	mSATA SATA 6 Gb/s SSD 64 GB, MLC type, ( 0°C~+70°C)
<b>ASDMS-MLC128G-CT</b>	mSATA SATA 6 Gb/s SSD 128 GB, MLC type, ( 0°C~+70°C)
<b>ASDMS-MLC256G-CT</b>	mSATA SATA 6 Gb/s SSD 256 GB, MLC type, ( 0°C~+70°C)

## Dimensions

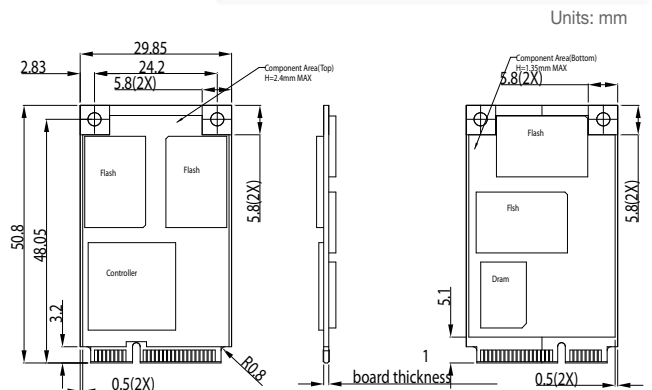

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADLINK Technology:](#)

[ASDMS-MLC64G-CT](#)