


AI-1027-TWT-5V-R 10mm Indicator

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview


- 10mm diameter, 3-8 VDC self-drive indicator
- 80 dBA minimum output (5 VDC @ 10 cm) and 2,700 Hz continuous tone
- Noryl® housing withstands Wave soldering temperatures
- Removable wash tag preserves performance

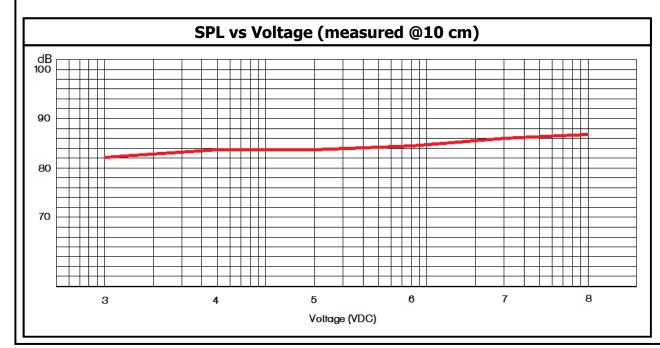









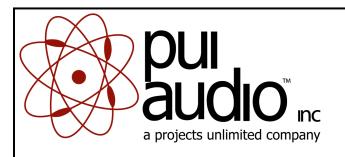


AI-1027-TWT-5V-R 10mm Indicator

Mechanical and Environment Testing		
Test Description	Test Condition	
High Temperature	85°C (±2°C) with random humidity for 96 hours	
Low Temperature	-30°C (±2°C) with random humidity for 96 hours	
Humidity	40°C (±2°C) with 90% to 95% relative humidity for 96 hours	
Vibration	0.75 mm movement modulated at 10-55 Hz for 3 hours	
Drop Test	100 cm free fall onto wood board, 10 cycles	
Temperature Cycle Test	-30°C to 80°C, 100 cycles	

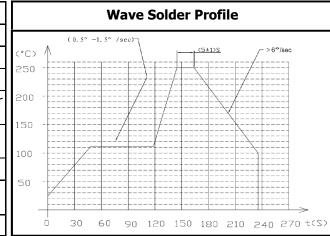

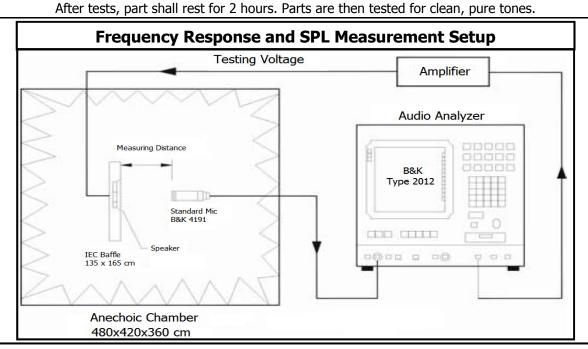

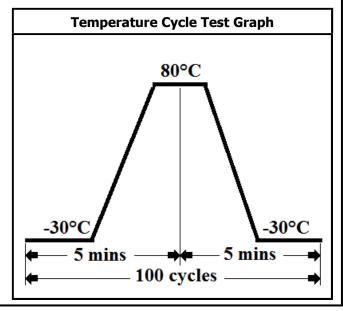



SPECIFICATIONS					
PARAMETERS VALUES UNITS					
RATED VOLTAGE	5	Vdc			
OPERATING VOLTAGE RANGE	3 ~ 8	Vdc			
RATED CURRENT (MAX)	30	mA			
MINIMUM SPL @ 10 CM	80	dBA			
RESONANT FREQUENCY	2,700 ± 200	Hz			
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec			
OPERATING TEMPERATURE	-20 ~ +80	°C			
STORAGE TEMPERATURE	-30 ~ +85	°C			
HOUSING MATERIAL	NORYL	-			
TERMINAL MATERIAL	Sn PLATED				
	RED COPPER	_			
WEIGHT	1	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003	, Pr	ojects	Unlimited	Inc.

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	4/29/2005	
Α	REVISED DIMENSION SIZE AND STYLE	11/28/20005	B.R.
В	ADDED POSITIVE TERMINAL LOCATION	11/3/2006	B.R.
С	REVISED PART NUMBER ON LABEL	1/23/2007	D.F.
D	REMOVED PRODUCT LABELING	8/7/2008	B.R.
E	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/11/2008	B.R.

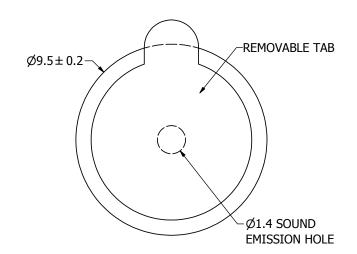

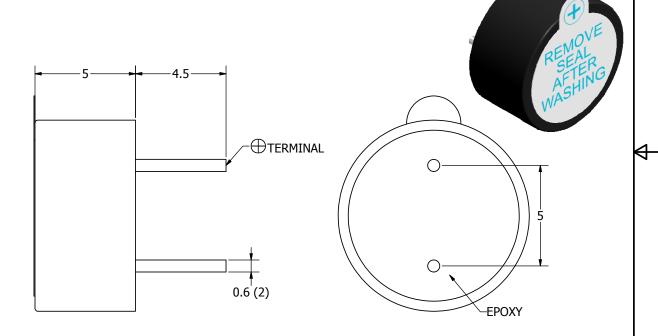

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by
DIMENSIONS ARE IN	SIZE	R.A.C.
MILLIMETERS,		\sim
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3	
AT 1027 T/A/	T 5\/ D idw	

			•				
C.	4/29/2005	B.R.		4/30/2005	R.W.		
\bigcirc	pul.			AI-1027-T			
4	audic) _{Inc}		Indic	cator		

Date

Checked by

Drawn Date

4/30/2005 10/11/2008

Approved by