

SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RESONANT FREQUENCY	4,000 ± 500	Hz	
RESONANT IMPEDANCE (MAX)	350	Ohm	
MAX INPUT VOLTAGE	30	V p-p	
CAPACITANCE @ 1kHZ	25,000 ±30%	pF	
PLATE MATERIAL	BRASS	-	
OPERATING TEMPERATURE	-20 ~ +60	°C	
STORAGE TEMPERATURE	-20 ~ +70	°C	


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED.

N PERMISSION	OF PROJEC	TS UNLIM	1ITED
INC. IS I	PROHIBITED	<i>.</i>	
©2003. Proie	cts Unlimite	d Inc.	

REVISION HISTORY			
LTR	LTR DESCRIPTION		APPROVED
- RELEASED FROM ENGINEERING		11/6/2001	
A REVISED TO NEW TEMPLATE		9/4/2003	R.W.
B ADDED DIMENSION AND TOLERANCES		1/7/2004	R.W.
С	REVISED SPECIFICATIONS	1/12/2004	R.W.
D	D REVISED DIMENSION 1/28/2004		R.W.
Е	REVISED DIMENSION	8/31/2004 R.W.	
F	REVISED CAP. SPEC. FROM 1 KHz TO 100 Hz & THICKNESS TOL. FROM .02 TO .03	8/8/2005	R.W.
G	G REVISED DIMENSION SIZE AND STYLE 12/21/200		B.R.
H REVISED TO INVENTOR 3-D DRAWING TEMPLATE 8/11/2010		B.R.	

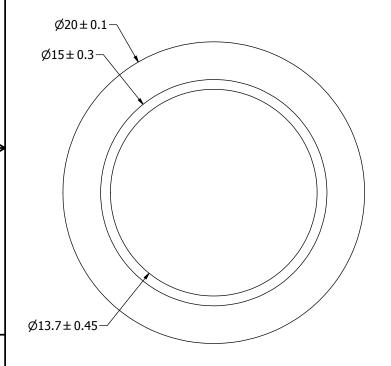

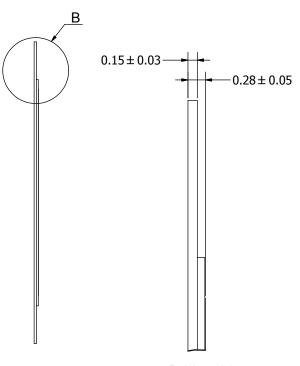

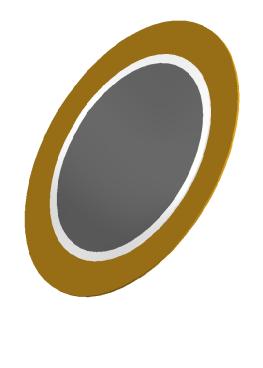

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

B (25:1)

Designed by

UNLESS OTHERWISE SPECIFIED: SIZE DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. AB2040B.idw

B.C.	5/28/2003	
	PUI audic a projects unlimited co	Inc

Date

Checked by

	Date	Approved by	Date	Drawn Date	
		S.J.	5/30/2003	8/10/2010	
AB2040B					

Edition Bender 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio:

AB2040B