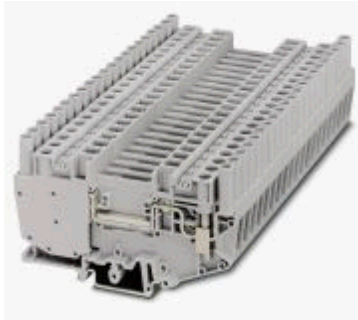




URTKD/SP









Terminal width 8.2

(IEC)	rigid	flexible	I	U	
[mm ²]	solid	stranded	AWG	[A]	
Connection data	0.5-10	0.5-6	20-8	50	500



Description	Type	Order No.	Pcs. Pkt.
Feed-through terminal block, with universal foot for reversible mounting on  or 	URTKD/SP	03 11 14 2	50

Accessories

(1) Fixed bridge , for cross connections in the terminal center, screw heads with insulating collar, 10-pos., divisible, with 10 screws		FBI 10-8	I _{max.} : 50 A	02 03 26 3	10
(2) Fixed bridge , 10-pos., divisible, with 10 screws for cross connections on both sides of the disconnect point insulated		FB 10-URTK/SP	I _{max.} : 50 A	03 11 66 3	10
(3) Isolator bridge bar , 10-position, divisible, with 10 screws, for switchable branches with		ISSBI 10-8	I _{max.} : 35 A	03 01 53 4	10
(4) Bridge bar isolator IS-K 10 as distance piece		IS-K 10		13 03 33 7	100
(5) Switch bar , 2-position, useable on both sides of the disconnect point, switching movement inwards, with 2 screws, orange		SB 2-URTK/SP	I _{max.} : 35 A	03 60 01 2	10
(6) Switch bar , for 4-pos. short circuiting of linked current transformer sets, usable on both sides of the disconnect point, with 4 screws, orange		SB 4-URTK/SP	I _{max.} : 35 A	03 60 02 5	10
(8) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick		ATP-URTK/SP		03 11 13 9	10
(11) Zack strip , 10-section, white		ZB 8 (see info)			
(12) Screwdriver		SZS 1,0 x 4,0		12 05 06 6	10

Technical data**Dimensions**

Width / length	[mm]	8.2 / 99.5
Height (NS 35:7.5 / NS 35:15 / NS 32)	[mm]	59 / 66.5 / 64

Technical data in accordance with IEC/ DIN VDE

Maximum load current / cross section	[A] / [mm ²]	57 / 10
Rated surge voltage / contamination class	[kV] / –	6 / 3
Surge voltage category / insulation material group	– / –	III / I

Connection capacity

stranded with ferrule without / with plastic sleeve	[mm ²]	0.25 - 10 / 0.25 - 6
-----------------------------------------------------	--------------------	----------------------

Multi-conductor connection (2 conductors with same cross section)

solid / stranded	[mm ²]	0.2 - 6 / 0.2 - 6
stranded with ferrule without plastic	[mm ²]	0.25 - 4
sleeve stranded with TWIN ferrule with plastic sleeve	[mm ²]	0.5 - 6

Stripping length	[mm]	11
-------------------------	------	----

Internal cylindrical gage (IEC 947-1:1988)		A 5
---------------------------------------------------	--	-----

Terminal point: thread / torque	– / [Nm]	M 4 / 1.5 - 1.8
----------------------------------------	----------	-----------------

Insulation material		PA
----------------------------	--	----

Inflammability class acc. to UL 94		V2
------------------------------------	--	----

Temperature indices RTI / Ti		125 / 100
------------------------------	--	-----------

Block diagram