
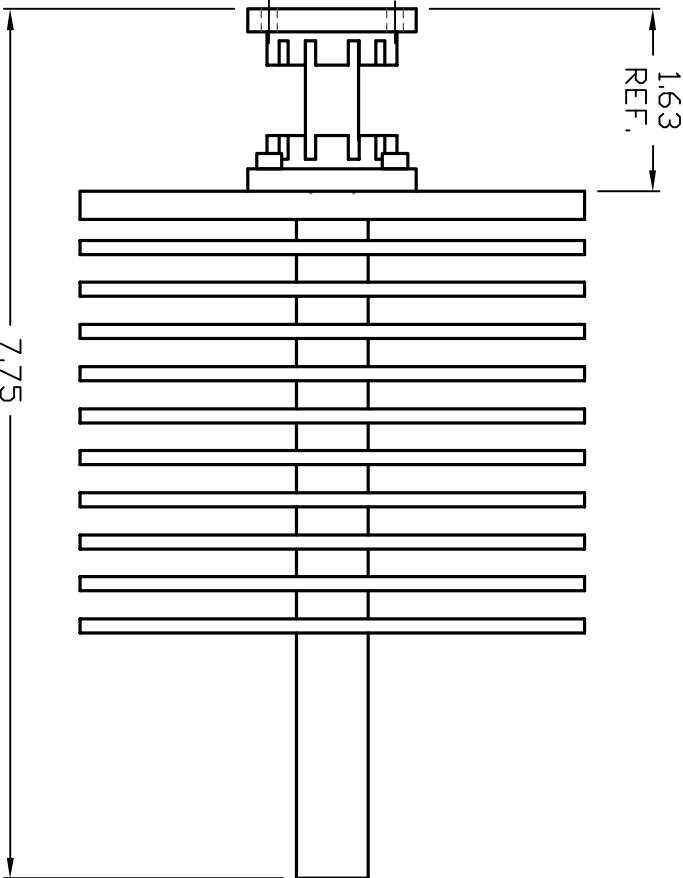


REV: C	DATE: 15/05/02	REDRAWN WITH DESIGN CHANGE	APPROVED
REV: D	DATE: 12/12/03	2-PIECE HOUSING IMPLEMENTED LENGTH 7.75 WAS 7.25, 1.63 WAS 1.48 VIEWS CHANGED TO SHOW INPUT	APPROVED

FLANGE AS PER
CUST. REQUEST
(COVER SHOWN)

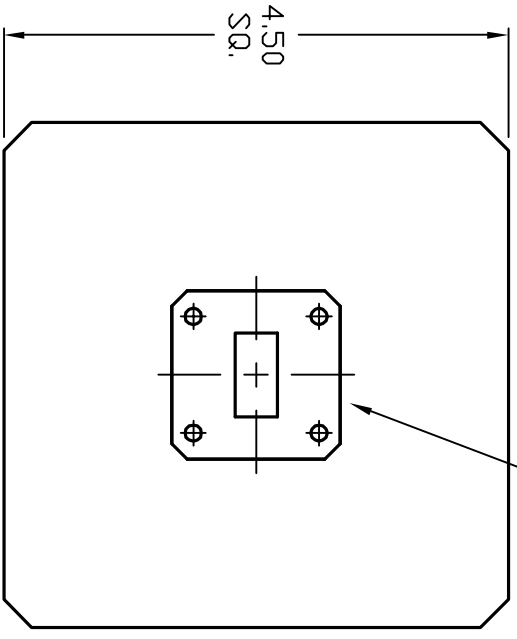

Model Number: 75-760-X
Waveguide Size: WR75
Flange: As Per Req.** (Cover shown)
VSWR: 1.15 Max.
Frequency Range: 10-15 GHz
Convection Cooling: 1400 (W)
Forced Air Cooling: 2000 (W)

*ATM MODEL#	DESIGNATION FOR COMMON FLANGES
1	= CPRG
2	= CPRF
6	= UG COVER
7	= UG CHOKE
8	= SPECIAL

MATERIAL ALUMINIUM FINISH HI TEMP BLACK TREATMENT IRIDITE MOD. NO. 75-760-X		DRAWN J. EAGAN CHECKED APPROVED DATE 12/05/02	
OUTLINE DRAWING WR75 HP TERMINATION BRICK LOAD			
ADVANCED TECHNICAL MATERIALS, INC. 49 RIDER AVE., PATCHOGUE N.Y. 11772 TEL: (631) 289-0386 FAX: (631) 289-0358 http://www.atmicrowave.com		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ±1/64 DECIMALS ±.01 ANGLES ±1/2°	
SCALE NONE DWG. NO. 2673 REV. D		CAGE CODE: OR8N4 DO NOT SCALE DWG	

