

# Downlight Cooler Flush Mount 48W LED Heat Sink

**This LED Heatsink is part of the Nuventix scalable LED portfolio.**

**Future proof** – Designed with the rapidly evolving light engine industry in mind, thermal performance can be easily increased or decreased without a luminaire redesign by adding or removing a SynJet Cooler

**Flexibility** – Configure to order luminaire production process, use heatsinks for low lumen applications and the SynJet Cooler with heatsink for higher lumen versions

**Freedom** – Compatible with most major light engines so thermal solutions and mechanical interfaces do not have to be redesigned when changing light engines

**Fast** – In stock and ready for overnight delivery, worldwide



## Specifications

### Thermal<sup>1</sup>

Thermal Wattage	Heatsink $\Theta_{sa}$ <sup>2</sup>	Heat Sink T <sub>Rise Above Ambient</sub>
22 W	1.2 (°C/W)	26 (°C)
32 W	1.2 (°C/W)	37 (°C)
42 W	1.2 (°C/W)	48 (°C)


### Mechanical

<b>Material</b>	ADC12 Al Cast
<b>Finish</b>	Clear/Black Ecoat
<b>Weight</b>	462g
<b>Regulatory</b>	RoHS

<b>Size</b>
Diameter: 138 mm
Height: 42 mm

The chart below summarizes the thermal performance of all round LED heatsink solutions with diameters from 118 to 138 mm.

Heatsink Rise Above Ambient vs. Thermal Power  
Round Heatsinks Diameter 118 to 138 mm

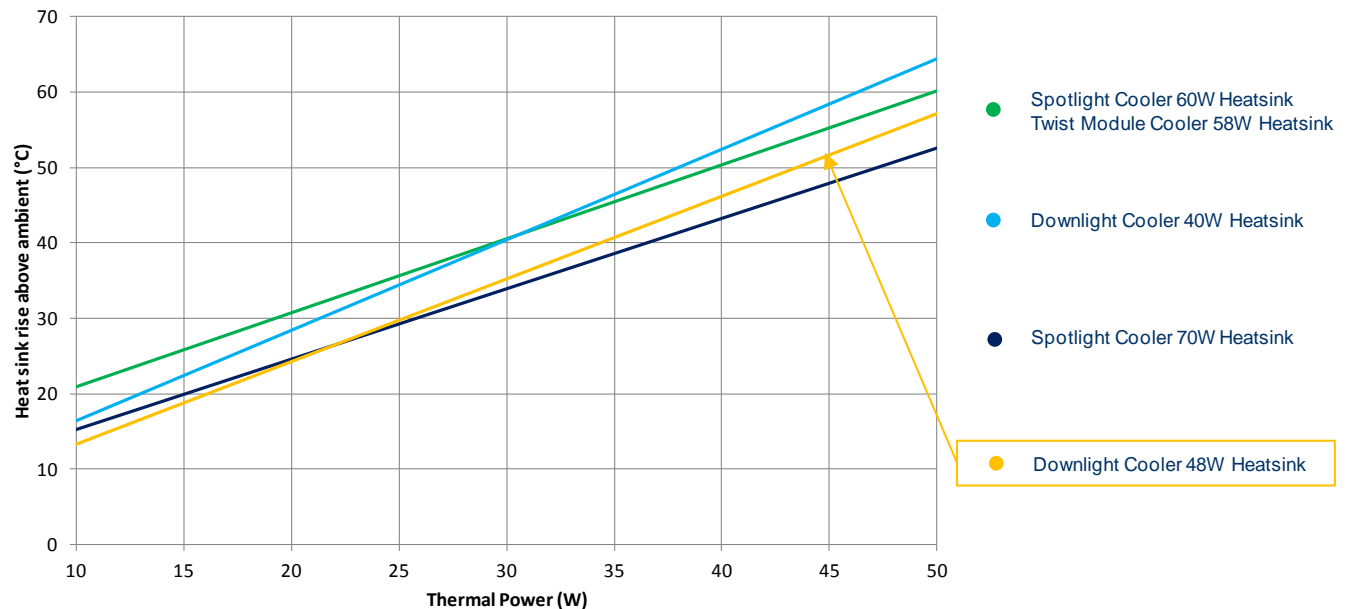


<sup>1</sup> All values are typical at 25°C unless otherwise stated.

<sup>2</sup> Thermal resistance values are given as reference only and are measured in free air without airflow obstructions. Thermal resistance is measured from the bottom middle of the heat sink to ambient air with a heat source of 19 cm<sup>2</sup>. Actual thermal performance may vary by application and final product design should be tested to assure proper thermal performance.

## PRODUCT DATASHEET

### Mechanical – LED Heatsink shown with Configurable heat sink

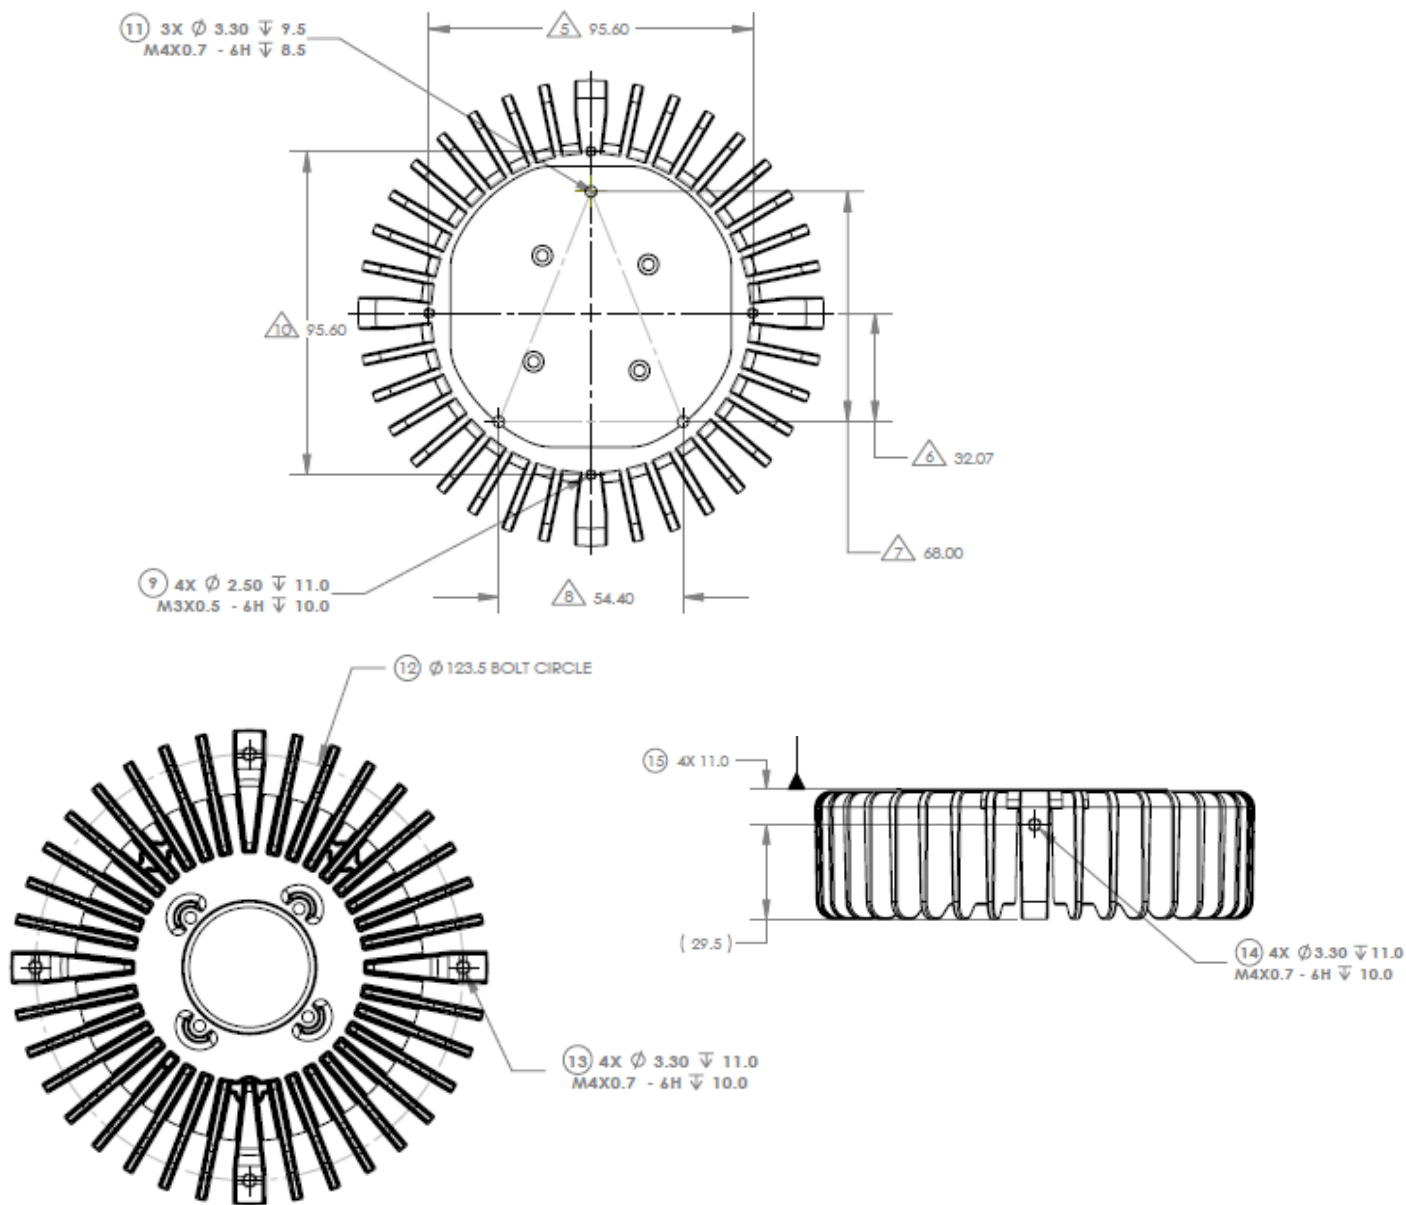

All dimensions are nominal and in mm unless otherwise stated. See product drawings for more detail.

### Part Numbers

Part Number	Description	Notes
HSSLS-CALCL-008	LED Heatsink, 48W, Downlight Cooler 140, No Lower Fins, Philips Fortimo and Lexel, Stark DLE, Silver	Contact sales for other heatsink options
HSSLS-CALCL-012	LED Heatsink, 48W, Downlight Cooler 140, No Lower Fins, Philips DLM, Philips Twistable, Stark DLE, Zhaga B2, Silver	Contact sales for other heatsink options
HSSLS-CALCL-013	LED Heatsink, 48W, Downlight Cooler 140, No Lower Fins, Bridgelux RS, Silver	Contact sales for other heatsink options
HSSLS-CALBL-013	LED Heatsink, 48W, Downlight Cooler 140, No Lower Fins, Osram PrevaLED, Black	Contact sales for other heatsink options

Nuventix reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or applications. For additional information, please contact Nuventix directly.