


# DIN 41 612 · complementary type 2R



Number of contacts

# 48, 32

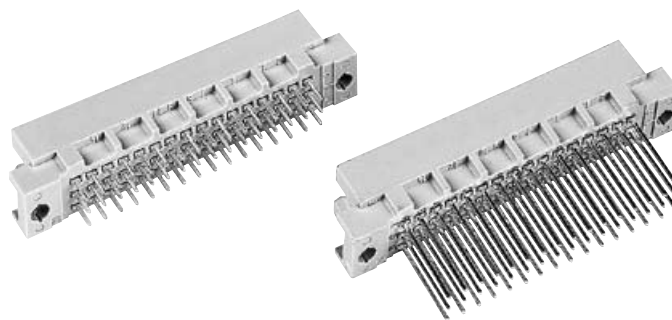

## Male connectors

DIN Signal to 2 A

Identification      Number of contacts      Contact arrangement      Part No.      Performance levels according to IEC 60 603-2. Explanation chapter 00

			3	2	1
Male connector with solder pins 2.5 mm	48		09 28 148 7902 09 28 348 7902 <sup>b)</sup>	09 28 148 6902 09 28 348 6902 <sup>b)</sup>	09 28 148 2902
	32		09 28 132 7902	09 28 132 6902	09 28 132 2902
Male connector with solder pins 4.0 mm	48		09 28 148 7903	09 28 148 6903 09 28 348 6903 <sup>b)</sup>	09 28 148 2903
	32		09 28 132 7903	09 28 132 6903	09 28 132 2903
Male connector with solder pins 13 mm	48			09 28 148 6577	
Male connector with wrap posts <sup>1)</sup> 13 mm	48		09 28 148 7907	09 28 148 6907	09 28 148 2907
	32		09 28 132 7907	09 28 132 6907	09 28 132 2907

Male connector with press-in pins      Part Nos. and variants see chapter 04

**Dimensions**

a	b	Solder pins
2.5	∅ 0.7	
4	∅ 0.6	
13	∅ 0.6	Wrap posts
a	b	
13	∅ 0.6	

**Panel cut out**

**Contact arrangement**  
View from termination side

**Board drillings**  
Mounting side

Dimensions in mm

Other contact arrangements as well with lagging/leading pins on request

<sup>b)</sup> Connectors with snap-in clips see chapter 00

<sup>1)</sup> To be used only for wire wrap termination