

Metal Alloy Resistors, Special Purpose, High Voltage



FEATURES

- HVW and MVW are uncoated. HVX (blue flameproof coating) available on request.
- High Voltage (up to 15 kV)
- Semi-precision: $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
- Axial leads: HVW = Tinned copper
MVW = Copper clad steel
- Lead (Pb)-free version is RoHS compliant



RoHS*
COMPLIANT

MATERIAL SPECIFICATIONS

Element: Metal alloy

Core: Alkaline earth porcelain


STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{70^\circ\text{C}}$ W	VOLTAGE RATING	RESISTANCE RANGE Ω
HVW1/2	HVW-1/2	1.0	3.5 kV	1K0 - 25M
MVW1/2	MVW-1/2	1.0	3.5 kV	1K0 - 25M
HVW3/4	HVW-3/4	1.5	7.5 kV	1K0 - 50M
MVW3/4	MVW-3/4	1.5	7.5 kV	1K0 - 50M
HVW001	HVW-1	2.5	7.5 kV	1K0 - 75M
HVW002	HVW-2	5.0	15.0 kV	1K0 - 200M

Note: All resistance values are calibrated at 100 VDC. Calibration at other voltages upon request.

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: HVW00126K40KLB (preferred part numbering format)

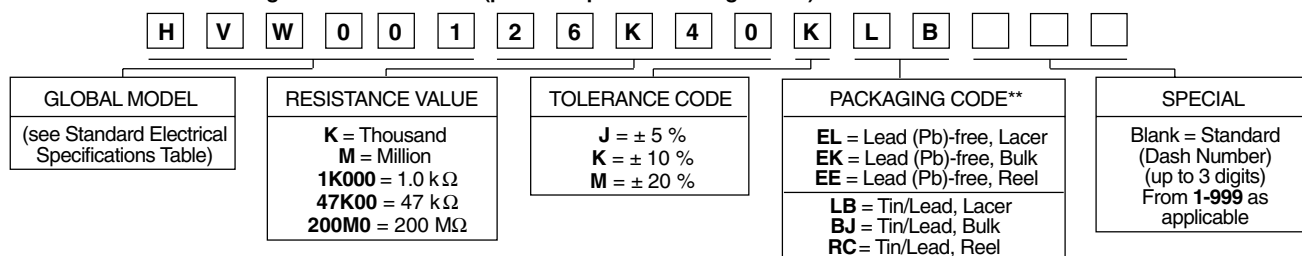

Historical Part Numbering: HVW-126.4K10 % (will continue to be accepted)




**** Note:** MVW products do not contain lead. Use tin/lead packaging codes to specify these lead free MVW products. Use lead free packaging codes specify lead free HVW and HVX products.


* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches [millimeters]

HVW/MVW (Uncoated)

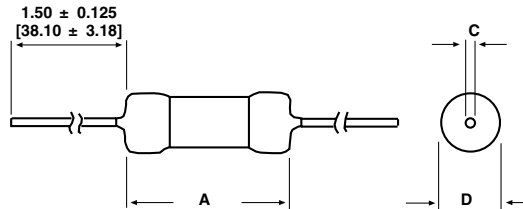

GLOBAL MODEL	A	C	D (Max.)
HVW1/2	0.545 ± 0.0015 [13.84 ± 0.38]	0.032 ± 0.002 [0.81 ± 0.05]	0.155 [3.94]
MVW1/2	0.545 ± 0.0015 [13.84 ± 0.38]	0.032 ± 0.002 [0.81 ± 0.05]	0.155 [3.94]
HVW3/4	0.895 ± 0.010 [22.73 ± 0.25]	0.032 ± 0.002 [0.81 ± 0.05]	0.155 [3.94]
MVW3/4	0.895 ± 0.010 [22.73 ± 0.25]	0.032 ± 0.002 [0.81 ± 0.05]	0.155 [3.94]
HVW001	0.920 ± 0.020 [23.37 ± 0.51]	0.032 ± 0.002 [0.81 ± 0.05]	0.275 [6.99]
HVW002	2.080 ± 0.030 [52.38 ± 0.76]	0.032 ± 0.002 [0.81 ± 0.05]	0.275 [6.99]

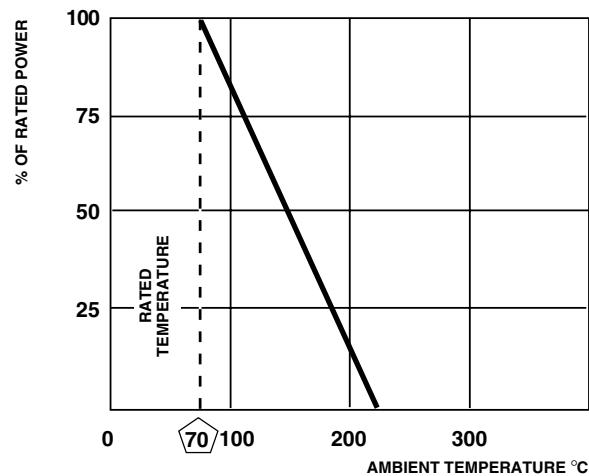

DERATING

Note: For operation in oil or inert atmosphere derating, consult factory.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.