


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION	DATE	APP'D.
1	RELEASED PER ECO #2212	JW 10/11/90	BJR
2	REVISED PER E910258	JW 5/14/91	BJR

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE:	250 VAC, 50/60 Hz
CAPACITANCE:	1500 pF ± 20%
DISSIPATION FACTOR:	≤1.3 MEASURED AT 1 KHZ
MAXIMUM PULSE RISE TIME:	du/dt 2000V / μSEC
DIELECTRIC:	METALLIZED PAPER
TEST VOLTAGE:	(ELECTRODE/ELECTRODE) 2700 VDC 1 SEC
INSULATION RESISTANCE:	120000 MΩ 500 VDC 1 MIN.
COATING	PLASTIC CAN, EPOXY RESIN SEALED, FLAME RETARDANT

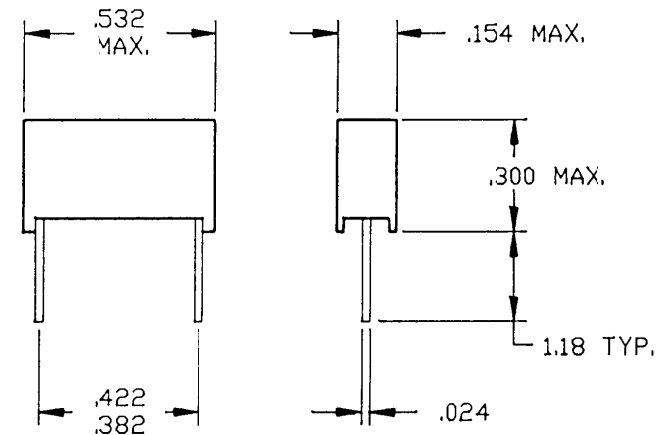

NOTES:

- APPROVALS INCLUDE VIE, SEV, DEMKO, SEMKO, NEMKO, UL, IMQ, DVE, DEMKO, EL, CSA.

COPY

ORIGINAL
ONLY WHEN STAMPED
IN RED

VICOR

ANDOVER, MA. U.S.A.
AC-PAPER-CAPACITOR
1500pF, 250 VAC, (Y)

DRAWN: J. WITEK	9/90	TOLERANCES (EXCEPT AS NOTED) .XX ± .01 .XXX ± .005 FRACT ± 1/64 ANGLES ± 1°	DRAWING NO.	REV.
CHECKED:			00770	2
APPR: <i>[Signature]</i>	5/91			
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING		SCALE 2X	SHEET 1 OF 1	