

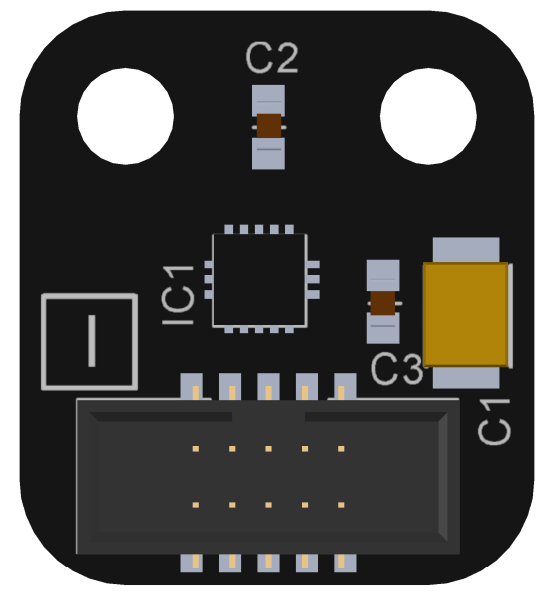
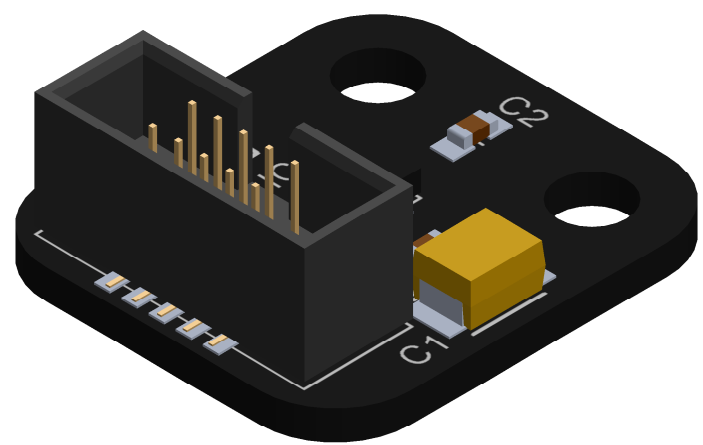


8 7 6 5 4 3 2 1

D
C
B
A

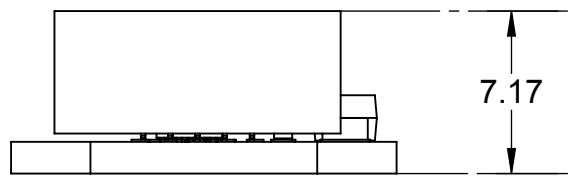

D
C
B
A

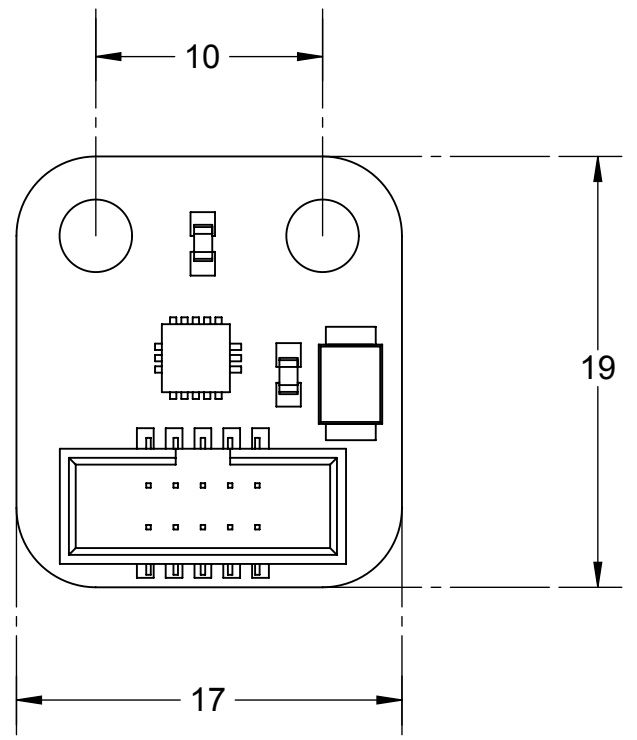

ENGINEERING NOTES:

SCREW HOLE DIAMETERS ARE 3.2MM, COMPLIANT WITH THE GADETEER STANDARD.
 HOLE SPACING IS BASED ON A 5MM GRID
 ALL DIMENSIONS ARE ± 0.5MM.

Accel G248 Module

GHI ELECTRONICS LLC

April 11, 2013

www.ghielectronics.com

SCALE	DIM	REV	SHEET
3:1	MM	1.1	1 of 1

8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GHI Electronics:](#)

[ACCEL-GM-442](#)