



OCR Series

Features

- 105°C, 2,000 hours assured
- Ultra low ESR with large permissible ripple current
- RoHS Compliance



Marking color: Blue


Specifications

Items	Performance											
Category Temperature Range	-55°C ~ +105°C											
Capacitance Tolerance	±20%	(at 120Hz, 20°C)										
Leakage Current (at 20°C)*	Rated voltage applied, after 2 minutes at 20°C. See Standard Ratings											
Tanδ (at 120Hz, 20°C)	See Standard Ratings											
ESR (at 100k ~ 300k Hz, 20°C)	See Standard Ratings											
Endurance	<table border="1"> <tr> <td>Test Time</td><td>2,000 Hrs</td></tr> <tr> <td>Capacitance Change</td><td>Within ±20% of initial value</td></tr> <tr> <td>Tanδ</td><td>Less than 150% of specified value</td></tr> <tr> <td>ESR</td><td>Less than 150% of specified value</td></tr> <tr> <td>Leakage Current</td><td>Within specified value</td></tr> </table>		Test Time	2,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
Test Time	2,000 Hrs											
Capacitance Change	Within ±20% of initial value											
Tanδ	Less than 150% of specified value											
ESR	Less than 150% of specified value											
Leakage Current	Within specified value											
* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 105°C.												
Moisture Resistance	<table border="1"> <tr> <td>Test Time</td><td>1,000 Hrs</td></tr> <tr> <td>Capacitance Change</td><td>Within ±20% of initial value</td></tr> <tr> <td>Tanδ</td><td>Less than 150% of specified value</td></tr> <tr> <td>ESR</td><td>Less than 150% of specified value</td></tr> <tr> <td>Leakage Current</td><td>Within specified value</td></tr> </table>		Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
Test Time	1,000 Hrs											
Capacitance Change	Within ±20% of initial value											
Tanδ	Less than 150% of specified value											
ESR	Less than 150% of specified value											
Leakage Current	Within specified value											
* The above Specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them at 60°C, 90 to 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.												
Resistance to Soldering Heat * (Please refer to page 8 for soldering conditions)	<table border="1"> <tr> <td>Capacitance Change</td><td>Within ±10% of initial value</td></tr> <tr> <td>Tanδ</td><td>Less than 130% of specified value</td></tr> <tr> <td>ESR</td><td>Less than 130% of specified value</td></tr> <tr> <td>Leakage Current</td><td>Within specified value</td></tr> </table>		Capacitance Change	Within ±10% of initial value	Tanδ	Less than 130% of specified value	ESR	Less than 130% of specified value	Leakage Current	Within specified value		
Capacitance Change	Within ±10% of initial value											
Tanδ	Less than 130% of specified value											
ESR	Less than 130% of specified value											
Leakage Current	Within specified value											
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td>Frequency (Hz)</td><td>120 ≤ f < 1k</td><td>1k ≤ f < 10k</td><td>10k ≤ f < 100k</td><td>100k ≤ f < 500k</td></tr> <tr> <td>Multiplier</td><td>0.05</td><td>0.3</td><td>0.7</td><td>1.0</td></tr> </table>		Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.05	0.3	0.7	1.0
Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k								
Multiplier	0.05	0.3	0.7	1.0								

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.

Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.

Diagram of Dimensions

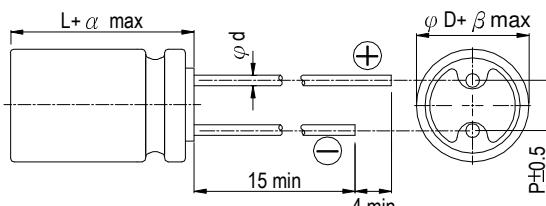

Lead Spacing and Diameter



Unit: mm

φ D	6.3	6.3	6.3	8	10	10
L	5.5	6.5	11	11.5	10	12
P	2.5	2.5	2.5	3.5	5.0	5.0
φ d	0.45			0.6		
α			1.0			
β			0.5			

Marking

φ D = 6.3

φ D = 8 ~ 10

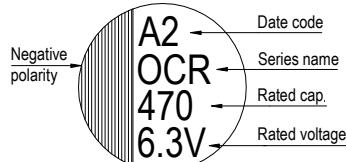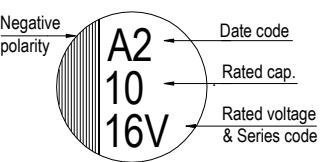

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

W. V. (V)	Surge Voltage (V)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Tan δ (120Hz, 20°C)	L C (μA)	E S R (m Ω /at 100k ~ 300k Hz, 20°C Max)	Rated R. C. (mA/rms at 100k Hz, 105°C)
2.5V (0E)	2.9	220	6.3 × 5.5	0.12	110	28	2,390
		390	6.3 × 11	0.12	195	18	3,160
		680	8 × 11.5	0.18	340	10	5,230
		1,000	10 × 10	0.18	500	14	4,700
		1,500	10 × 12	0.18	750	12	5,500
4V (0G)	4.6	150	6.3 × 5.5	0.12	120	40	1,810
		270	6.3 × 11	0.12	216	15	3,200
		560	8 × 11.5	0.18	448	10	5,230
		1,200	10 × 12	0.18	960	12	5,500
6.3V (0J)	7.2	100	6.3 × 5.5	0.12	126	40	1,810
		220	6.3 × 11	0.12	277	18	3,160
		330	6.3 × 6.5	0.12	416	28	2,390
		390	8 × 11.5	0.15	491	12	4,770
		470	8 × 11.5	0.15	592	12	4,770
		820	10 × 12	0.15	1,033	12	5,500
10V (1A)	12.0	100	6.3 × 6.5	0.12	200	45	1,700
		220	10 × 10	0.15	440	17	3,950
		330	8 × 11.5	0.12	660	14	4,420
		560	10 × 12	0.12	1,360	12	5,300
16V (1C)	18.0	47	6.3 × 5.5	0.10	150	50	1,650
		100	6.3 × 11	0.10	320	22	2,820
		180	8 × 11.5	0.12	576	16	4,360
		330	10 × 10	0.12	1,056	16	4,360
		330	10 × 12	0.12	1,056	14	5,050
20V (1D)	23.0	22	6.3 × 5.5	0.10	88	60	1,450
		56	6.3 × 11	0.10	224	25	2,650
		100	8 × 11.5	0.15	400	24	3,320
		100	10 × 10	0.15	400	24	3,320
		150	10 × 12	0.15	600	20	4,320
		330	10 × 12	0.12	1,320	24	2,800
25V (1E)	29.0	6.8	6.3 × 5.5	0.10	170	80	1,200
		33	8 × 11.5	0.12	165	24	3,320
		56	8 × 11.5	0.12	280	24	3,320
			10 × 12.5	0.12	280	20	4,320
		68	8 × 11.5	0.12	340	24	3,320
		100	10 × 12	0.12	500	20	4,320
35V (1V)	40.0	270	10 × 12	0.12	1,350	25	2,800
		22	8 × 11.5	0.12	154	31	2,300
		39	8 × 11.5	0.12	273	31	2,300
		47	10 × 12	0.12	329	30	3,650
		68	10 × 12	0.12	476	28	2,700
50V (1H)	58.0	150	10 × 12	0.12	1,050	26	2,700
		27	8 × 11.5	0.12	390	29	2,200
		47	10 × 12	0.12	680	28	2,600
63V (1J)	73.0	27	8 × 11.5	0.12	340	33	2,100
		47	10 × 12	0.12	592	29	2,600

Part Numbering System

OCR series	470 μF	$\pm 20\%$	6.3V	Bulk Package	Gas Type	8 $\phi \times 11.5L$	Pb-free and PET coating case
OCR	471	M	0J	BK	-	0811	
Series	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lelon:

[OCR102M0JBK-1012](#) [OCR102M1ABK-1012](#) [OCR151M1VBK-1012](#) [OCR181M1CBK-0808](#) [OCR470M1EBKF0808](#)
[OCR471M0JBK-0808](#) [OCR471M1ABK-0808](#) [OCR681M1ABKF0811](#)