


Number of contacts

# 15-78

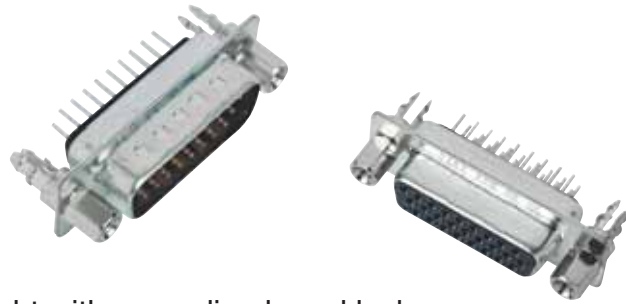

High density with stamped solder pins, straight with grounding board locks


Identification	No. of contacts	Part No.	
<b>Performance levels</b> Explanations see page 05.04 Other performance levels on request		Performance level <b>3</b>	
		<b>S4<sup>1)</sup></b>	
<b>Male connector</b> metal shell with dimples			
	15	09 56 161 771 .	09 56 161 571 .
	26	09 56 261 771 .	09 56 261 571 .
	44	09 56 361 771 .	09 56 361 571 .
	62	09 56 461 771 .	09 56 461 571 .
	78	09 56 561 771 .	09 56 561 571 .
<b>Female connector</b> metal shell			
	15	09 56 151 751 .	09 56 151 551 .
	26	09 56 251 751 .	09 56 251 551 .
	44	09 56 351 751 .	09 56 351 551 .
	62	09 56 451 751 .	09 56 451 551 .
	78	09 56 551 751 .	09 56 551 551 .
Please insert digit for flange thread or fitted female screw locks			
4-40 UNC ▶ 2			
fitted screw locks 4-40 UNC ▶ 3			

D-Sub

<sup>1)</sup> S4: ≥ 0.76 µm Au (30 µinch)

Number of contacts

# 15-78

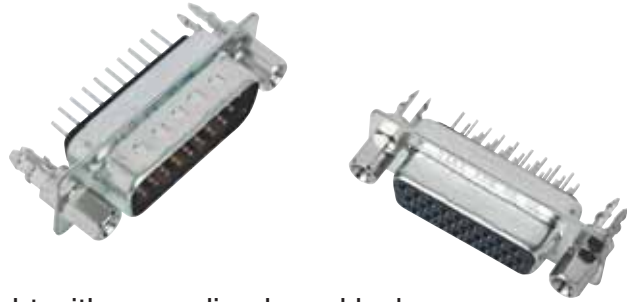

High density with stamped solder pins, straight with grounding board locks

Identification

Drawing

Dimensions in mm

Male connector

15-62      78

15-62      78

4-40 UNC      fitted screw locks  
4-40 UNC

	a	b $\pm 0.1$	c	e	f	g
15	30.9	25.0	12.5	0.89	0.25	2.29
26	39.2	33.3	12.5	0.64	0.51	2.29
44	53.1	47.0	12.5	0.64	0.51	2.29
62	69.4	63.5	12.5	0.62	0.58	2.41
78	67.0	61.1	15.4	—	—	2.41

Female connector

15-62      78

15-62      78

4-40 UNC      fitted screw locks  
4-40 UNC

Board drillings

male 15-62

female 15-62

male 78

female 78