
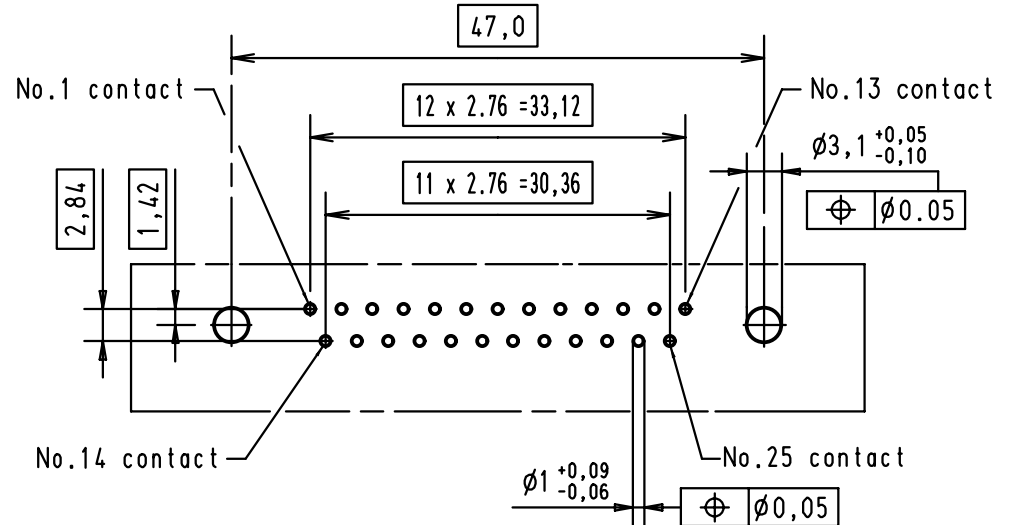


PCB layout hole
component side
(PCB holes plating : Tin)

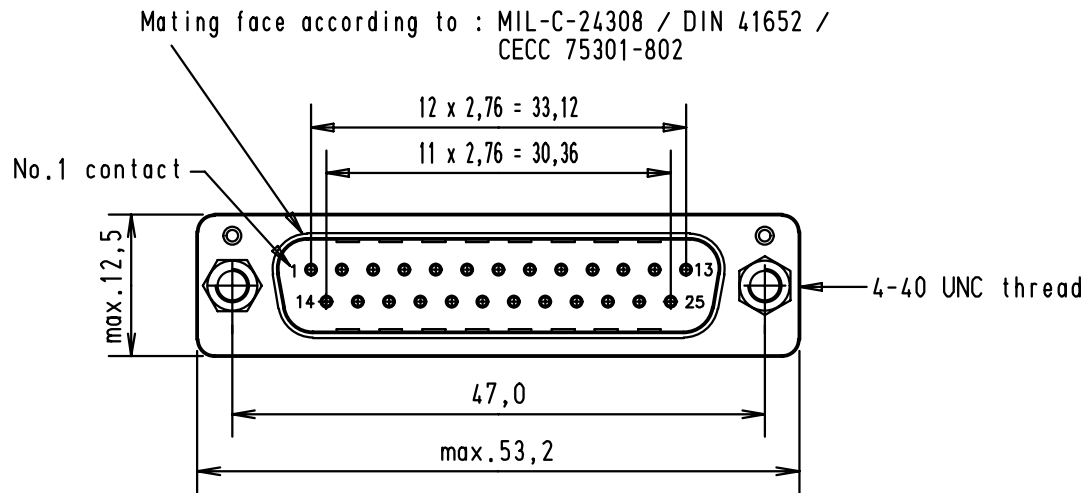

							<table border="1"> <tr> <td>Detail.</td> <td>Dat.</td> <td>Name</td> </tr> <tr> <td>Insp.</td> <td>05/03/01</td> <td>jfb</td> </tr> <tr> <td>Stand.</td> <td></td> <td></td> </tr> </table>		Detail.	Dat.	Name	Insp.	05/03/01	jfb	Stand.			<p>All Dim. in mm Orig. Size DIN A 3</p>	<p>D-Sub 25 poles straight male connector with press-in termination, version nut and screw lock.</p> <p>Maßstab/ Scale 2,5:1</p>
Detail.	Dat.	Name																	
Insp.	05/03/01	jfb																	
Stand.																			
09663247707	3	5.7	4.35																
09663246707	2	5.7	4.35																
09663245707	0.76 µm Au	5.7	4.35	27980	05/03/01	jfb													
Part number	Performance level	A ±0.2	B ±0.2	Mod.	Dat.	Name													
<p>HARTING EURL F-95972 Paris</p>								<p>TB 0966324x70x</p> <p>Sub.</p>	<p>Blatt/ Page 4</p>										

09 66 324 6707**D-Sub - S PCB connector**

Other applications

gender	male connector, straight
Termination	none
shell	tinned metal shell with dimples
Number of contacts	25 way
Flange heigh	flange height 5.7 mm
Board fixing	without grounding press-in board locks
flange	with screw lock UNC 4-40
Performance level	Performance level 2
Material	LCP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

[Inquiry](#)

The data sheet is up to date

2D files

[PDF](#)[DXF](#)

09 66 324 5707

D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	none
shell	tinned metal shell with dimples
Number of contacts	25 way
Flange heigh	flange height 5.7 mm
Board fixing	without grounding press-in board locks
flange	with screw lock UNC 4-40
Performance level	Performance level S4
Material	LCP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats

2D files

Typenblatt

Typenblatt

09 66 324 7707**D-Sub - S PCB connector**

Other applications

gender	male connector, straight
Termination	none
shell	tinned metal shell with dimples
Number of contacts	25 way
Flange heigh	flange height 5.7 mm
Board fixing	without grounding press-in board locks
flange	with screw lock UNC 4-40
Performance level	Performance level 3
Material	LCP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

[Inquiry](#)

The data sheet is up to date

2D files

[PDF](#)[DXF](#)