

The metal chassis mount "Z" series connectors are designed for the audio user where durability, reliability and strength across a wide range of applications are important. All AC products are manufactured to the highest quality standards and will withstand the harshest environments. This range complies with IEC268-12 and AES 14-1992 standards. CSA File Number 68598

Features

- The "D" size housing can be either front or rear mounted using the same panel cutout.
- The "P" size housing is the original wide flange front mounting XLR connector. "PN" is the original narrow flange front mounting male connector.
- A leading first mate last break socket contact is standard on all female connectors (Pin 1).
- · Solder cup or Vertical PCB versions.
- Connectors are fitted with a grounding system for RFI shielding applications.
- Available in 3, 4, 5, 6A and 7 contact arrangements.
- · Compatible with all other XLR brands.

Options

- Solder Bucket termination
- · Vertical PCB contacts
- Zinc Diecast Shell Satin Nickel Finish
- Zinc Diecast Shell Black Polyester Finish
- · Gold, Silver or Tin Plated Contacts
- Bulk Packaging
- Single Bag packs
- Precision machined contacts
- Cost effective stamped contacts on 3 pole
- Latchless versions (Non-Latching) (Female only)

22

Note: A ground tag is standard on all AC "Z" series connectors. Although the ground tag is intended for RFI shielding applications, Amphenol cannot guarantee its effectiveness in all cases.

The non-conductive Black polyester finish insulates the ground tag from the shell and should not be used in applications requiring ground contact to the shell.

Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

AC "Z" SERIES XLR METAL CHASSIS MOUNT CONNECTORS

Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.

METAL D TYPE FLANGE - SOLDER AND PCB



Features:

- Zinc Diecast Shell.
- D size housing can be front or rear mounted using the same panel cutout.
- Solder Bucket connections.
- Vertical PCB mounting (not available in 4 contact female).
- Precision machined or Stamped contacts (3 pin only).
- Leading first mate last break socket contact.
- · Positive latch lock system.

Options: Stamped contacts (3 contact only), Gold plated contacts, Vertical PCB contacts, Black finish, Non-Latching (Female only), Bulk Pack.

Part Number Breakdown: page 31 Specifications: page 32 PCB Footprints: page 33 Panel Cutouts: page 33

PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
-		XLR 3 pole male,	Standard	AC3MMDZ
2		D Flange, Machined contacts, Nickel Finish	Gold Plated Contacts	AC3MMDZ-AU
	19.0 [.7487] 2.7 [.106"] 5.5 [.217"]	NICKEI FIIIISII	Vertical PCB	AC3MMDZV
Carring			Bulk Pack	AC3MMDZ BULK
		XLR 3 pole male, D Flange,	Standard	AC3MMDZB
9	→ 26.0 [1.024 ⁻] → → 32.1 [1.263 ⁻] → 36.5 [1.437 ⁻] →	Machined contacts, Black Finish	Gold Plated Contacts	AC3MMDZB-AU
		Diack Fillion	Vertical PCB	AC3MMDZVB
as a state and			Bulk Pack	AC3MMDZB BULK
-		XLR 3 pole male, D Flange,	Standard	AC3MDZ
		Stamped contacts, Nickel Finish	Gold Plated Contacts	AC3MDZ-AU
	19.0 [748] 19.0		Vertical PCB	AC3MDZV
			Bulk Pack	AC3MDZ BULK
		XLR 3 pole male, D Flange,	Standard	AC3MDZB
8		Stamped contacts, Black Finish	Gold Plated Contacts	AC3MDZB-AU
		Didok i mon	Vertical PCB	AC3MDZVB
and the second second			Bulk Pack	AC3MDZB BULK
the second		XLR 3 pole female, D Flange,	Standard	AC3FDZ
		Stamped contacts, Nickel Finish	Gold Plated Contacts	AC3FDZ-AU
	-26.0 [1.024"]		Vertical PCB	AC3FDZV
			Bulk Pack	AC3FDZ BULK
		XLR 3 pole female, D Flange,	Standard	AC3FDZB
6	19.0 [.748"]	Stamped contacts, Black Finish	Gold Plated Contacts	AC3FDZB-AU
			Vertical PCB	AC3FDZVB
and the second second			Bulk Pack	AC3FDZB BULK

PRODUCT - FIGURE	DRAWING	Dimens	sions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
				XLR 4 pole male, D Flange,	Standard	AC4MDZ
ST AN				Machined contacts, Nickel Finish	Gold Plated Contacts	AC4MDZ-AU
	^{19.0}	2.7 [.106"]	5.5 [.217"]		Vertical PCB	AC4MDZV
and the second second					Bulk Pack	AC4MDZ BULK
			PCB CONTACTS	XLR 4 pole male, D Flange,	Standard	AC4MDZB
9/3	26.0 [1.024"]	Solder Contacts 5.5 [.217"] 32.1 [1.263"]	27.5 [1.081"] - 36.5 [1.437"]	Machined contacts, Black Finish	Gold Plated Contacts	AC4MDZB-AU
					Vertical PCB	AC4MDZVB
and the second second					Bulk Pack	AC4MDZB BULK
				XLR 4 pole female, D Flange,	Standard	AC4FDZ
				Machined contacts, Nickel Finish	Gold Plated Contacts	AC4FDZ-AU
	œ-26.0 [1.024"]-∞	e e 6.5 [.256"]	2.5 [.098"]		Vertical PCB	AC4FDZV
and the second second					Bulk Pack	AC4FDZ BULK
				XLR 4 pole female, D Flange,	Standard	AC4FDZB
O man		5.5 [.217"]		Machined contacts, Black Finish	Gold Plated Contacts	AC4FDZB-AU
			Black Fillion	Vertical PCB	AC4FDZVB	
					Bulk Pack	AC4FDZB BULK
-				XLR 5 pole male, D Flange,	Standard	AC5MDZ
12			Machined contacts, Nickel Finish	Gold Plated Contacts	AC5MDZ-AU	
				Vertical PCB	AC5MDZV	
Contraction of the second					Bulk Pack	AC5MDZ BULK
	1.0 [1.220			XLR 5 pole male, D Flange,	Standard	AC5MDZB
8	-26.0 [1.024"]-	5.5 [.217"] 32.1 [1.263"]	- 27.5 [1.083"]	Machined contacts, Black Finish	Gold Plated Contacts	AC5MDZB-AU
					Vertical PCB	AC5MDZVB
a subscription of the					Bulk Pack	AC5MDZB BULK
				XLR 5 pole female, D Flange,	Standard	AC5FDZ
E				Machined contacts, Nickel Finish	Gold Plated Contacts	AC5FDZ-AU
	~ 26.0 [1.024"]-~	e−e+ 6.5 [.256"]			Vertical PCB	AC5FDZV
And and a second second	24.0 [.945"]				Bulk Pack	AC5FDZ BULK
		SOLDER CONTACTS 		XLR 5 pole female, D Flange,	Standard	AC5FDZB
19			Machined contacts, Black Finish	Gold Plated Contacts	AC5FDZB-AU	
			00,2 [1,720]		Vertical PCB	AC5FDZVB
and the second s					Bulk Pack	AC5FDZB BULK

PRODUCT - FIGURE	DRAWING	Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
			XLR 6A pole male, D Flange,	Standard	AC6AMDZ
			Machined contacts, Nickel Finish	Gold Plated Contacts	AC6AMDZ-AU
	19.0 [.748"]	-2.7 [.106"]		Vertical PCB	AC6AMDZV
	(1,220°]			Bulk Pack	AC6AMDZ BULK
	31.0 [1	SOLDER CONTACTS	XLR 6A pole male, D Flange,	Standard	AC6AMDZB
9	-26.0 [1.024*]	-5.5 [.217"] -32.1 [1.263"]	Machined contacts, Black Finish	Gold Plated Contacts	AC6AMDZB-AU
			Diack Tillion	Vertical PCB	AC6AMDZVB
				Bulk Pack	AC6AMDZB BULK
			XLR 6A pole female, D Flange,	Standard	AC6AFDZ
9			Machined contacts, Nickel Finish	Gold Plated Contacts	AC6AFDZ-AU
	→ 26.0 [1.024"] →	- 6.5 [.256"]		Vertical PCB	AC6AFDZV
all and the second s	HEU9 [1.520]			Bulk Pack	AC6AFDZ BULK
			XLR 6A pole female, D Flange,	Standard	AC6AFDZB
TO.		SOLDER CONTACTS	Machined contacts, Black Finish	Gold Plated Contacts	AC6AFDZB-AU
		— 31.1 [1.224"] 님 36.2 [1.425"] 님		Vertical PCB	AC6AFDZVB
				Bulk Pack	AC6AFDZB BULK
12			XLR 7 pole male, D Flange, Gold Plated Machined contacts, Nickel Finish	Standard	AC7MDZ
		.2.7 [.106"] 5.5 [.217"]		Vertical PCB	AC7MDZV
				Bulk Pack	AC7MDZ BULK
8		-5.5 [.217"] -27.5 [1.083"] -	XLR 7 pole male, D Flange, Gold Plated Machined contacts,	Standard	AC7MDZB
			Black Finish	Vertical PCB	AC7MDZVB
and the second second				Bulk Pack	AC7MDZB BULK
and the second s			XLR 7 pole female, D Flange, Gold Plated Machined contacts,	Standard	AC7FDZ
	→ 26.0 [1.024"]	6.5 [.256*] 2.5 [.099"]	Nickel Finish	Vertical PCB	AC7FDZV
and the				Bulk Pack	AC7FDZ BULK
CO (LLT)			XLR 7 pole female, D Flange, Gold Plated Machined contacts,	Standard	AC7FDZB
	ha- [.748"]-e- ha	19.0 [.748 [•]] → 32.0 [1.260 [•]] → 36.2 [1.425 [•]] →		Vertical PCB	AC7FDZVB
and the second second				Bulk Pack	AC7FDZB BULK

METAL P TYPE FLANGE - SOLDER AND PCB




Features:

- · Zinc Diecast shell.
- The P size housing is the original wide flange front mounting XLR connector. PN is the original narrow, front mounting male connector.
- · Solder Bucket connections.
- Vertical PCB mounting.
- Precision Machined or Stamped contacts (3 pin only).
- Leading first mate last break socket contact.
- Positive latch lock system.

Options: Stamped contacts (3 contact only), Gold plated contacts, Vertical PCB contacts, Black Finish, Non-Latching (Female only), Bulk Pack.

Part Number Breakdown: page 31Specifications: page 32PCB Footprints: page 33Panel Cutouts: ppage

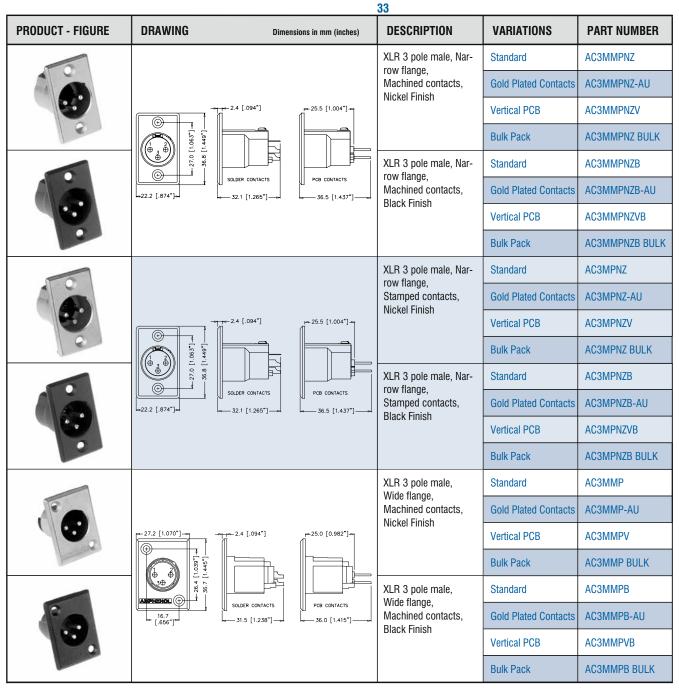

PRODUCT - FIGURE	DRAWING	Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
			XLR 3 pole male, Wide flange,	Standard	AC3MP
			Stamped contacts, Nickel Finish	Gold Plated Contacts	AC3MP-AU
		4 [.094"]		Vertical PCB	AC3MPV
	(1.445") (1.445") (1.445")			Bulk Pack	AC3MP BULK
	36.7 [1.4]		XLR 3 pole male, Wide flange,	Standard	AC3MPB
		DER CONTACTS 2.5 [1.278"]	Stamped contacts, Black Finish	Gold Plated Contacts	AC3MPB-AU
			Diack Finish	Vertical PCB	AC3MPVB
Construction of				Bulk Pack	AC3MPB BULK
			XLR 3 pole female, Wide flange,	Standard	AC3FPZ
Poiste -			Stamped contacts, Nickel Finish	Gold Plated Contacts	AC3FPZ-AU
		5 [.138"]		Vertical PCB	AC3FPZV
1 miles				Bulk Pack	AC3FPZ BULK
	SOLDER CONTAC 15.7 16.57 1.656"]		XLR 3 pole female, Wide flange, Stamped contacts, Black Finish	Standard	AC3FPZB
				Gold Plated Contacts	AC3FPZB-AU
			DIACK FILIISI	Vertical PCB	AC3FPZVB
				Bulk Pack	AC3FPZB BULK
			XLR 4 pole male, Nar- row flange, Machined contacts, Nickel Finish	Standard	AC4MPNZ
				Gold Plated Contacts	AC4MPNZ-AU
		4 [.094"] 25.5 [1.004"]		Vertical PCB	AC4MPNZV
e				Bulk Pack	AC4MPNZ BULK
			XLR 4 pole male, Nar- row flange,	Standard	AC4MPNZB
		DER CONTACTS PCB CONTACTS 2.1 [1.265"]	Machined contacts, Black Finish	Gold Plated Contacts	AC4MPNZB-AU
				Vertical PCB	AC4MPNZVB
				Bulk Pack	AC4MPNZB BULK
			XLR 4 pole male,	Standard	AC4MP
8			Wide flange, Machined contacts, Nickel Finish	Gold Plated Contacts	AC4MP-AU
		2.4 [.094"] r≠25.0 [0.982"]↔		Vertical PCB	AC4MPV
fraction and				Bulk Pack	AC4MP BULK
			XLR 4 pole male,	Standard	AC4MPB
Pa		DLDER CONTACTS	Wide flange, Machined contacts,	Gold Plated Contacts	AC4MPB-AU
			Black Finish	Vertical PCB	AC4MPVB
instantial set				Bulk Pack	AC4MPB BULK

PRODUCT - FIGURE	DRAWING	Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
			XLR 4 pole female, Wide flange,	Standard	AC4FPZ
C Push			Machined contacts, Nickel Finish	Gold Plated Contacts	AC4FPZ- AU
]		Vertical PCB	AC4FPZV
				Bulk Pack	AC4FPZ BULK
			XLR 4 pole female, Wide flange,	Standard	AC4FPZB
C	SOLDER COM		Machined contacts, Black Finish	Gold Plated Contacts	AC4FPZB-AU
	16.7 [.656 ⁻]	204"]	Didok i mish	Vertical PCB	AC4FPZVB
and the second sec				Bulk Pack	AC4FPZB BULK
			XLR 5 pole male, Nar- row flange,	Standard	AC5MPNZ
			Machined contacts, Nickel Finish	Gold Plated Contacts	AC5MPNZ-AU
	-=+==-2.4 [.094"]	⊨-25.5 [1.006"]		Vertical PCB	AC5MPNZV
C				Bulk Pack	AC5MPNZ BULK
	36.8 [1-1		XLR 5 pole male, Nar- row flange,	Standard	AC5MPNZB
10	Solder contact →22.2 [.874"]+→		Machined contacts, Black Finish	Gold Plated Contacts	AC5MPNZB-AU
	32.1 [1.265"] - I	5"]		Vertical PCB	AC5MPNZVB
				Bulk Pack	AC5MPNZB BULK
	-27.2 [1.070"]	XLR 5 pole male, Wide flange,	Standard	AC5MP	
			Machined contacts, Nickel Finish	Gold Plated Contacts	AC5MP-AU
] -25.0 [0.982"]-		Vertical PCB	AC5MPV
Land and the second sec				Bulk Pack	AC5MP BULK
		DLBER CONTACTS 31.5 [1.238"]	XLR 5 pole male, Wide flange,	Standard	AC5MPB
Con la constante			Machined contacts, Black Finish	Gold Plated Contacts	AC5MPB-AU
			Didok Tillion	Vertical PCB	AC5MPVB
PLOTING OF WELL				Bulk Pack	AC5MPB BULK
			XLR 5 pole female, Wide flange,	Standard	AC5FPZ
			Machined contacts, Nickel Finish	Gold Plated Contacts	AC5FPZ-AU
]		Vertical PCB	AC5FPZV
L				Bulk Pack	AC5FPZ BULK
PUSH	Souder contacts 16.7 16.7 16.7 16.7 16.7 16.7 16.7 16.7 16.7 10.7 1		XLR 5 pole female, Wide flange, Machined contacts, Black Finish	Standard	AC5FPZB
		8"] H=- 22.8 [.899"]=-		Gold Plated Contacts	AC5FPZB-AU
	[.050]			Vertical PCB	AC5FPZVB
				Bulk Pack	AC5FPZB BULK

PRODUCT - FIGURE	DRAWING	Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
			XLR 6A pole male, Narrow flange,	Standard	AC6AMPNZ
			Machined contacts, Nickel Finish	Gold Plated Contacts	AC6AMPNZ-AU
	2.4 [.05	94"] (1.006"]		Vertical PCB	AC6AMPNZV
				Bulk Pack	AC6AMPNZ BULK
	36.8		XLR 6A pole male, Narrow flange,	Standard	AC6AMPNZB
	SOLDER CON -22.2 [.874"]-	006"]	Machined contacts, Black Finish	Gold Plated Contacts	AC6AMPNZB-AU
			Didok Tillion	Vertical PCB	AC6AMPNZVB
				Bulk Pack	AC6AMPNZB BULK
			XLR 6A pole male, Wide flange,	Standard	AC6AMP
Can la			Machined contacts, Nickel Finish	Gold Plated Contacts	AC6AMP-AU
		094"] ↦25.0 [0.982"]		Vertical PCB	AC6AMPV
and the second second				Bulk Pack	AC6AMP BULK
	Solder Conta 16.7 16.56 T		XLR 6A pole male, Wide flange,	Standard	AC6AMPB
			Machined contacts, Black Finish	Gold Plated Contacts	AC6AMPB-AU
				Vertical PCB	AC6AMPVB
				Bulk Pack	AC6AMPB BULK
Iteres	27.2 [1.071 [*]]		XLR 6A pole female, Wide flange, Machined contacts, Nickel Finish	Standard	AC6AFPZ
				Gold Plated Contacts	AC6AFPZ-AU
		.138"]		Vertical PCB	AC6AFPZV
				Bulk Pack	AC6AFPZ BULK
Upper and a second	- 36.8		XLR 6A pole female, Wide flange,	Standard	AC6AFPZB
		PCB CONTACTS	Machined contacts, Black Finish,	Gold Plated Contacts	AC6AFPZB-AU
	16.7 [.656*] - 31.1	[1.224"] 36.2 [1.425"]		Vertical PCB	AC6AFPZVB
and the second se				Bulk Pack	AC6AFPZB BULK
			XLR 7 pole male, Nar- row flange, Gold Plated Machined contacts,	Standard	AC7MPNZ
	-=+=2.4 [.09	14"]	Nickel Finish	Vertical PCB	AC7MPNZV
6				Bulk Pack	AC7MPNZ BULK
G	Saper control of the second se		XLR 7 pole male, Nar- row flange, Gold Plated Machined contacts,	Standard	AC7MPNZB
	- ,		Black Finish	Vertical PCB	AC7MPNZVB
				Bulk Pack	AC7MPNZB BULK

PRODUCT - FIGURE	DRAWING	Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
2			XLR 7 pole male, Wide flange, Gold Plated Machined contacts,	Standard	AC7MP
			Nickel Finish	Vertical PCB	AC7MPV
A REAL PROPERTY AND A REAL				Bulk Pack	AC7MP BULK
Pa	Image: Second	Solder contacts	XLR 7 pole male, Wide flange, Gold Plated Machined contacts,	Standard	AC7MPB
		Black Finish	Vertical PCB	AC7MPVB	
and the second second				Bulk Pack	AC7MPB BULK
Paul Paul			XLR 7 pole female, Wide flange, Gold Plated Machined contacts,	Standard	AC7FPZ
			Nickel Finish	Vertical PCB	AC7FPZV
1 miles				Bulk Pack	AC7FPZ BULK
C run	36.8	SOLDER CONTACTS	XLR 7 pole female, Wide flange, Gold Plated Machined contacts,	Standard	AC7FPZB
	16.7 [.656"]	→ 32.0 [1.260"]→	Black Finish	Vertical PCB	AC7FPZVB
and and a second second				Bulk Pack	AC7FPZB BULK

METAL TYPE FLANGE

PART NUMBER BREAKDOWN

METAL TYPE FLANGE

E. G. AC3MMPNZVB-AU B AC (Series Prefix), 3 c Z (Metal Chassis Serie - AU (Gold Plated Con	contacts, Ma es), Vertical	Printed Circu	Contacts, PN (Narrow Flange), it Board, Black Polyester Finish,	SERIE	PREFIX CON	TACT	ANOUT	is ionthi	SHEL	SH	L SEP	ANNIA G	ION IN IN	^{5th} con	TACTPLA	MG PACHAG	MO	Ĩ
		r ackayeu.		AC	3	M		/1 F	PN	Z	V	B	-	AU		BULK		
SERIES PREFIX	AC	=	Series Prefix															
CONTACT LAYOUTS	3	=	3 Contacts															
	4	=	4 Contacts															
	5	=	5 Contacts	-														
	6A	=	6 Contacts															
	7	=	7 Contacts															
GENDER	F	=	Female Socket Contacts															
	м	=	Male Pin Contacts	-														
MACHINED	Blank	=	Stamped Contacts															
CONTACTS ¹	м	=	Machined Contacts (Applicable 3 male pin contacts only)					J										
SHELL STYLE	D	=	Small Flange (front or rear mountir	ng)														
	Р	=	Large Shell with wide flange	_														
	PN	=	Large Shell with Narrow Flange (male only)															
SHELL SERIES	Blank	=	Male P Shell Style only															
	Z	=	Metal Chassis Series															
TERMINATION	Blank	=	Solder Buckets															
	V	=	Vertical Printed Circuit Board															
SHELL FINISH ²	Blank	=	Nickel Plated Finish															
	В	=	Black Polyester Finish															
CONTACT PLATING ³	Blank	=	Standard Plating (Silver or Tin -															
	AU	=	Refer to Standard Data.) Gold Plated															
PACKAGING	Blank	=	Individual Bags															
	BULK	=	Bulk Packed	-														

Note:

¹4 - 7 contact connectors have machined contacts and grounding as standard. They are not available in stamped contacts.

² Ground contacts are not supplied with the black polyester finish shell option.

³ 7 Contact is gold plated as standard.

⁴ Non-Latching Versions (Female) available - Please contact us for part number options.

STANDARD DATA

STANDARD DATA AC SERIES CHASSIS - METAL "Z"

		VALUE									
GENERAL Characteristics	Number of contacts	3	4	5	6A	7					
UNARAU I ERIS I IUS	Contact Arrangement (Front view of pin inserts)										
	Termination		Solder Buck	et / Printed Circuit	Board (PCB)						
	Max. Wire Gauge - Stranded wire: Solder Printed Circuit Board - PCB	14AWG N/A	16AWG N/A	18AWG N/A	18AWG N/A	20AWG N/A					
	Flammability rating of plastics			UL94V-0							
	Environmental		Complies with	EU RoHS 2 Directi	ve 2011/65/EU						
ELECTRICAL Characteristics	Service Voltage RMS			133V ¹⁾							
CHARACTERISTICS	Test Voltage AC RMS	1400V									
	Current carrying capacity: Solder Printed Circuit Board (PCB)	15A 15A	10A 10A	7.5A 7.5A	7.5A 7.5A	5A 5A					
	Typical Contact Resistance	≤3mΩ									
	Insulation Resistance	≥1000MΩ									
CLIMATIC Characteristics	Protection Class	IP40									
UNANAUTENISTIUS	Operating Temperature		-25°C to) +75°C (-13°F to	+167°F)						
MECHANICAL Characteristics	Weight - Metal 2)	31g	32g	33g	33g	33g					
UNANAUTENISTIUS		(0.068lb)	(0.070lb)	(0.072lb)	(0.072lb)	(0.072lb)					
	Mechanical Operations	1000 mating cycles									
MATERIALS	Connector Shell			Diecast Zinc Alloy	/						
	Shell Finish	Satin Nickel or Black Polyester									
	Insulators	UL94V-0 PBT Resin or Modified PPE Resin									
	Male Contact										
	Stamped Solder and PCB-(Material/Plating)) Phosphor Bronze / Silver or Gold (optional)									
	Machined Solder-(Material/Plating)	Brass / Silver or Gold (optional)									
	Female Contact										
	Stamped Solder and PCB-(Material/Plating)		Phosphor	Bronze / Tin or Go	old (optional)						
	Machined Solder-(Material/Plating)		Brass	/ Silver or Gold (O	ptional)						


¹⁾ Not suitable for domestic applications above 50V

²⁾ Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

AC SERIES CHASSIS METAL "Z"


AC SERIES CHASSIS CONNECTORS


METAL TYPE FLANGE

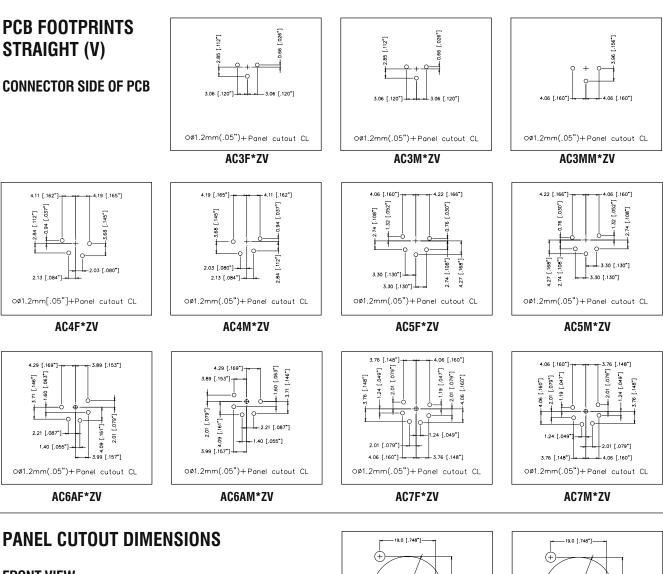


FRONT VIEW

¢24.0 [¢.945"]-2~\$3.5 [\$.138"]-+ Panel cutout Centre Line AC*FDZ





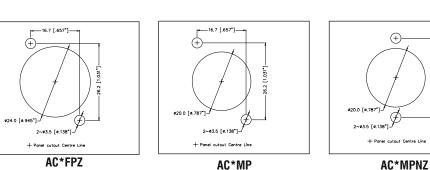

www.amphenolaudio.com

1.063

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

<u>AC3MB-AU</u> <u>AC3MCP-AU</u> <u>AC3MP-AU</u> <u>AC3MPNZ-AU</u> <u>AC3MDP-AU</u> <u>AC3FDZ-AU</u> <u>AC3MDZ-AU</u> <u>AC3MAH4-SW-B</u> AC5FDZB-AU AC5MDZB-AU AC3MMP BULK