
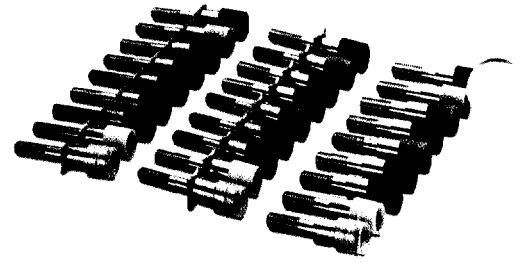



Test Plug Sockets




PSB

PSBJ ...

Description	Color	Type	Order No.	Pcs. Pkt.	Type	Order No.	Pcs. Pkt.
Test plug socket, for the terminal blocks UK 2,5 N, UK 3 N, UK 5 N		PSB 3/10/4	06 01 29 2	100			
Test plug socket, for the terminal blocks UGSK/S		PSB 3,5/8,5/6	03 05 29 7	100			
Test plug socket, for the terminal blocks UK 6 N, UK 10 N, UK 16 N		PSB 4/7/6	03 03 29 9	100			
Test plug socket, for the terminal blocks UK 35		PSB 6/5/6	02 05 29 0	100			
Test plug socket, insulated, for the terminal blocks UK 2,5 N, UK 3 N, UK 5 N	transparent				PSBJ 3/13/4	02 01 30 4	100
Test plug socket, insulated	transparent				PSBJ 3,5/18/6 TRANSPARENT	03 11 39 1	100
	white				PSBJ 3,5/18/6 WH	03 11 31 7	100
	red				PSBJ 3,5/18/6 RD	03 11 32 0	100
	blue				PSBJ 3,5/18/6 BU	03 11 33 3	100
	yellow				PSBJ 3,5/18/6 YE	03 11 34 6	100
	green				PSBJ 3,5/18/6 GN	03 11 35 9	100
	violet				PSBJ 3,5/18/6 VT	03 11 36 2	100
	gray				PSBJ 3,5/18/6 GY	03 11 37 5	100
	black				PSBJ 3,5/18/6 BK	03 11 38 8	100
Test plug socket, insulated	transparent				PSBJ 3,5/18/7 TRANSPARENT	03 10 40 2	100
	white				PSBJ 3,5/18/7 WH	03 10 31 8	100
	red				PSBJ 3,5/18/7 RD	03 10 32 1	100
	blue				PSBJ 3,5/18/7 BU	03 10 33 4	100
	yellow				PSBJ 3,5/18/7 YE	03 10 34 7	100
	green				PSBJ 3,5/18/7 GN	03 10 35 0	100
	violet				PSBJ 3,5/18/7 VT	03 10 37 6	100
	gray				PSBJ 3,5/18/7 GY	03 10 38 9	100
	black				PSBJ 3,5/18/7 BK	03 10 39 2	100
Test plug socket, insulated	transparent				PSBJ 4/15/6 TRANSPARENT	03 03 41 9	100
	white				PSBJ 4/15/6 WH	03 03 31 2	100
	red				PSBJ 4/15/6 RD	03 03 32 5	100
	blue				PSBJ 4/15/6 BU	03 03 35 4	100
	yellow				PSBJ 4/15/6 YE	03 03 36 7	100
	green				PSBJ 4/15/6 GN	03 03 37 0	100
	violet				PSBJ 4/15/6 VT	03 03 38 3	100
	gray				PSBJ 4/15/6 GY	03 03 39 6	100
	black				PSBJ 4/15/6 BK	03 03 40 6	100
Test plug socket, insulated	transparent						
	white						
	red						
	blue						
	yellow						
	green						
	violet						
	gray						
	black						
Test plug socket, fully insulated, touch-protected in acc. with VBG 4, for 4 mm Ø safety measuring leads, for universal test disconnect terminal blocks URTK/S		red blue yellow green violet black					
Material			silver-plated brass			PE-LD, silver-plated brass	
Temperature range	[°C]		- 40 to + 80			- 40 to + 80	
Color			-			see description	



PSBJ-GSK/S ...
for 4 mm Ø test plugs




PSBJ-URTK/S ...
for 4 mm Ø test plugs

Type	Order No.	Pcs. Pkt.
PSBJ-GSK/S TRANSPARENT	03 05 39 4	100
PSBJ-GSK/S WH	03 05 31 0	100
PSBJ-GSK/S RD	03 05 32 3	100
PSBJ-GSK/S BU	03 05 33 6	100
PSBJ-GSK/S YE	03 05 34 9	100
PSBJ-GSK/S GN	03 05 35 2	100
PSBJ-GSK/S VT	03 05 36 5	100
PSBJ-GSK/S GY	03 05 37 8	100
PSBJ-GSK/S BK	03 05 38 1	100


PE-LD, silver-plated brass
- 40 to + 80
see description

Type	Order No.	Pcs. Pkt.
PSBJ-URTK/S RD	03 11 74 4	100
PSBJ-URTK/S BU	03 11 75 7	100
PSBJ-URTK/S YE	03 11 73 1	100
PSBJ-URTK/S GN	03 11 76 0	100
PSBJ-URTK/S VT	03 11 77 3	100
PSBJ-URTK/S BK	03 11 72 8	100

polyamide PA non-reinforced, silver-plated brass
- 40 to + 80
see description





Dimensional drawing PSB a/b/c



Dimensional drawing PSBJ a/b/c

Test Plug



MPS

2.3 mm Ø test plugs

PS

4 mm Ø test plugs

Description	Color	Type	Order No.	Pcs. Pkt.	Type	Order No.	Pcs. Pkt.	
Test plug, consisting of metal part for 2.3 mm Ø socket hole and insulating sleeve for MPS metal part		MPS-MT	02 01 74 4	10				
	white	MPS-IH WH	02 01 66 3	10				
	red	MPS-IH RD	02 01 67 6	10				
	blue	MPS-IH BU	02 01 68 9	10				
	yellow	MPS-IH YE	02 01 69 2	10				
	green	MPS-IH GN	02 01 70 2	10				
	violet	MPS-IH VT	02 01 71 5	10				
	gray	MPS-IH GY	02 01 72 8	10				
	black	MPS-IH BK	02 01 73 1	10				
	Test plug, consisting of: Metal part for 4 mm Ø socket hole and insulating sleeve for PS metal part					PS-MT	03 11 64 7	10
		white				PS-IH WH	03 11 56 6	10
		red				PS-IH RD	03 11 57 9	10
		blue				PS-IH BU	03 11 58 2	10
		yellow				PS-IH YE	03 11 59 5	10
green					PS-IH GN	03 11 60 5	10	
violet					PS-IH VT	03 11 61 8	10	
gray					PS-IH GY	03 11 62 1	10	
black					PS-IH BK	03 11 63 4	10	
Material			polyamide PA non-reinforced, silver-plated brass			polyamide PA non-reinforced, silver-plated brass		
Inflammability class acc. to UL 94			V2			V2		
Temperature range		[°C]	- 40 to + 100			- 40 to + 100		
Color			see description			see description		

Reducing Plug



RPS

Description	Type	Order No.	Pcs. Pkt.
Reducing test plug, as transition from 4 mm Ø test plugs to 2.3 mm Ø test plug sockets	RPS	02 01 64 7	10
Material	polyamide PA non-reinforced, silver-plated brass		
Inflammability class acc. to UL 94	V2		
Temperature range	[°C]	-40 to +100	
Color	gray		