
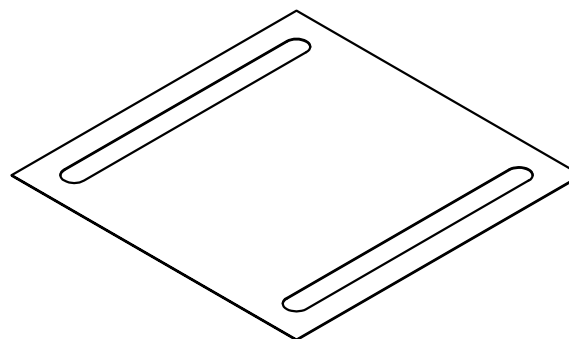
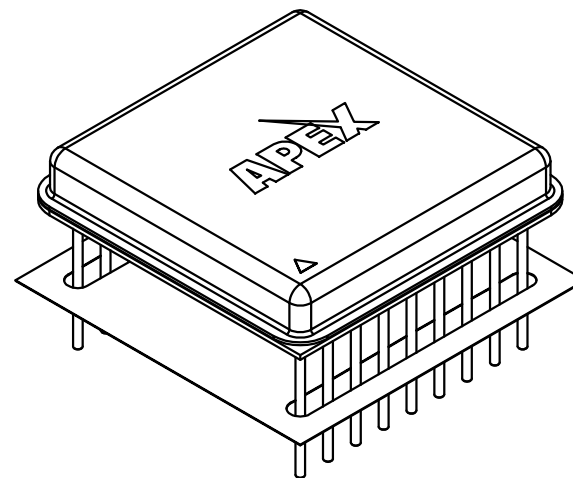


4

3

2

1

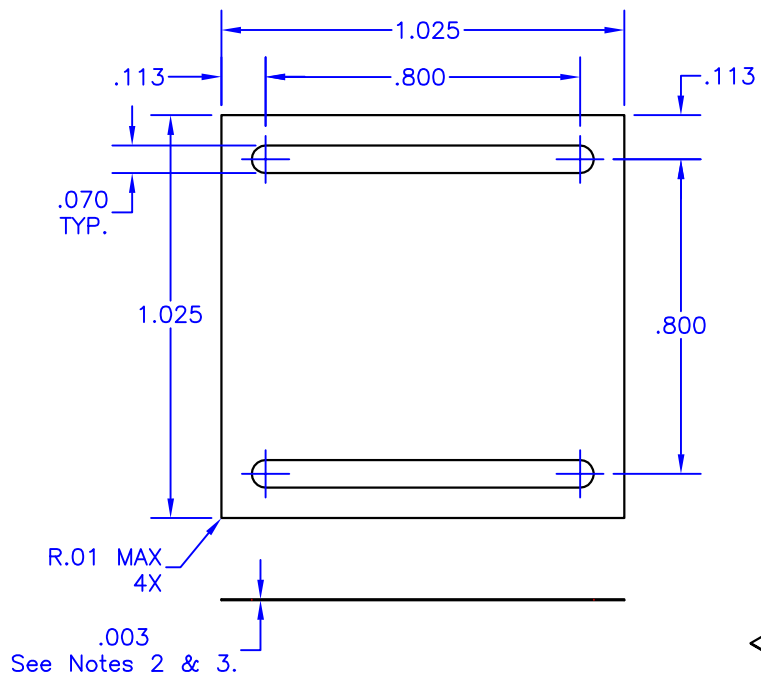

NOTES:

- Unless otherwise noted, all dimensions are in inches.
- Foil Material: .002 thick 1145 aluminum
- Interface Material: .0005 thick phase-change thermal compound, both sides.
 Maximum shipping & storage temperature – 40°C
 Reflow temperature – 60°C
 Maximum recommended service temperature – 200°C
- Thermal impedance: .030 °C/W-in² (.194 °C/W-cm²) @ 20psi
- Thermal washers shall be packaged in quantities of 10 with oversize separators between them.
- Used with 18-pin DIP package (Apex designator: EL).
- Power Devices part no. AL-103-103-APX
- Supplier is to label each plastic box with the Cirrus Logic part number.

TOLERANCES – UNLESS OTHERWISE SPECIFIED

.XX = ±.01
.XXX = ±.005
ANG. = ±.5°



TITLE THERMAL WASHER, DIP

PART NO.

TW09

SUBJECT MECHANICAL DRAWING

ENG. D-M	TECH/DRAWN. P.ECK	DCA 11077	SH. OF 1 1	FILENAME: TW09	REV E	DATE 28FEB11
----------	-------------------	-----------	------------	----------------	-------	--------------

4

3

2

1