



Heyco® Custom Turn-2-Lock Cord and Plug Sets

Male Configurations for 125 V, 15 Amp Applications

Listed for Use in the U.S. and Canada Under File E217650




DESCRIPTION Volts-Amps	WIRE			PART NO.	ROJ B in.	Strip Length C in.	Ring Terminal Part No. **	Strain Relief Part No. ***		
	Type	Gauge AWG-Cond	Color					A* Length in.	D in.	
NEMA L5-15P, 125 Volts, 15 Amps, 16 Gauge										
T2L 125V-15A	SE00W	16-3	Black	36.0	S7650 S7650W	2.5 2.5	1/2 5/8	8125 -	-	-
				46.0	S7650S	5	1/2	-	-	-
				47.0	S7650F	6	5/8	-	-	-
				48.0	S7650CC	7	1/2	8125	-	-
				70.0	S7650T	5				
				72.0	S7650G	2.5	1/2	8125	-	-
				84.0	S7650EE	7	1/2	-	-	-
				96.0	S7650I	2.5	1/2	8125	-	-
				118.0	S7650U	5	1/2	-	-	-
				120.0	S7650BA	2.5	1/2	8125	-	-
				131.0	S7650Z	6	5/8	-	-	-
				142.0	S7650V	5	1/2	-	-	-
				156.0	S7650GG S7650UU	7 6	1/2 5/8	-	-	-
				T2L 125V-15A	SE0W	16-3	White	36.0	S7651 S7651E S7651CD S7651W	2.5 5.5 5.5 2.5
42.0	S7651D	3	1/2					-	-	-
48.0	S7651CC S7651XX	7 2.5	1/2 1/2					- 8125	-	-
72.0	S7651FF S7651G	2.5 2.5	5/8 1/2					- 8125	-	-
78.0	S7651AU S7651CE S7651C	4 5 7	1/2 1/2 1/2					8125 8123 -	- 1860 -	-
84.0	S7651AB S7651EE	2.5 7	5/8 1/2					-	-	-
96.0	S7651BK	2.5	5/8					-	-	-
108.0	S7651AC									
120.0	S7651AE									
132.0	S7651L	7	1/2					-	-	-

- For ease of assembly into the panel, we can assemble a Snap-In Self-Locking Strain Relief or Snap-In Cordgrip Strain Relief to your cordset. See Section 4 for Strain Relief devices. For Liquid Tight Fittings, see Section 3.
- Consult Heyco for additional UL approved wire types such as SJTOW, SJTOOW, STW, and STOOW. **See table on page 4-12.**
- Or build your own: For Turn-2-Lock Components, see pages 8-24 thru 8-27.
- For additional configurations, consult Heyco. Our Axcell Rapid Response Team is ready to meet your design requirements.

* Consult Heyco for custom lengths, applied Ring Terminals and applied Strain Relief devices.
 ** For additional Heyco Terminals see pages 8-15 thru 8-20.
 *** For additional Heyco Liquid Tight and Strain Relief Devices, see Sections 3 & 4.

Commonly Applied Turn-2-Lock Accessories

Ring Terminals			Strain Relief Devices		
PART NO.	DESCRIPTION	Page	PART NO.	DESCRIPTION	Page
6072	.265, HD 8-12 AWG	8-19	1859	RDD 301-2 Black	4-10
8123	#8, 20-14 AWG	8-20	1860	RDD 301-2 White	4-10
8125	#10, 20-14 AWG	8-20	1865	RDD 401 Black	4-10
8145	#10, 12 AWG	8-20	3231	LTF 1/2 NPT Black	3-25
8147	#10, 10 AWG	8-20	4539	Brass CG Pg11-120	3-22
			4545	Brass CG Pg16-150	3-22
			4547	Brass CG Pg21-160	3-22

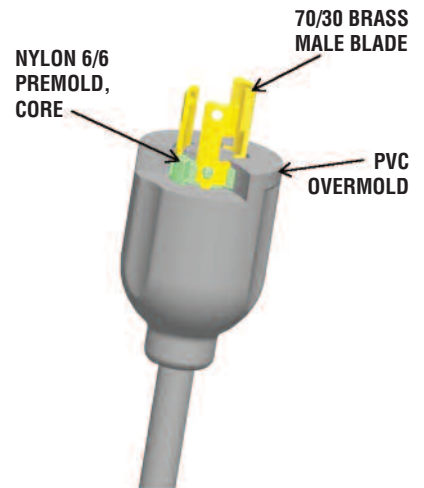

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[2988](#)